

40

1081
24.10.96. ✓

KOCKS CONSULT GMBH

KOCKS INGENIEURE

40

The European Commission
Attn. Mr. D. Stroobants
Directorate General I A
External Relations
Tacis IA/C 7
88, rue d'Arlon

Европейская Комиссия
Генеральный директорат 1 А
Отдел внешних отношений
ТАСИС 1А / С7
88 , улица Д' Арлон
Г - ну Штробантс

M. Kozlov jun. (8 sheets)
23.10.96

B-1040 Brussels

B - 1040 Брюссель

243/Wi-vs/1327 Koblenz, 15.10.1996

243/Wi-vs/1327 Кобленц, 15.10.1996

Dear Sir,

Уважаемый господин,

**TRACECA Project: Implementation of
Pavement Management Systems
Project Number: TELREG9305
Progress Report No. 2**

**Проект ТРАСЕКА : Создание системы
управления дорожным покрытием
Номер проекта TELREG9305
Промежуточный отчет 2**

Circulation:	
me	
JK	
DC	
BS	
AA	
A	
S	
SG	
MT	
GN	

24/10/96

We take pleasure in submitting to you the Russian version of the progress report no. 2 for the period July to September 1996. The report is submitted in two copies, one bound and one loose leaf.

Мы посылаем Вам русский перевод промежуточного отчета 2 за период с июля по сентябрь 1996 года. Отчет посылается в виде двух копий, одна сброшюрованная и одна не сброшюрованная.

Yours faithfully

Искренне Ваш,

KOCKS CONSULT GMBH
Consulting Engineers

KOCKS CONSULT GMBH
Консультирующие инженеры

Carsten Griese
Carsten Griese
Карстен Гризе

**Copies to: Tacis CU, all 8 recipient states
(five bound and one loose leaf each)**

Копии: Координационным бюро ТАСИС во всех 8 ми государствах-получателях помощи (пять сброшюрованных и одна не сброшюрованная)

Boed 1st
29.10.96

В депо
Отчит канцелярия
Н. Сидоров (сид)
Кузнец
29.10.96

ЕВРОПЕЙСКИЙ СОЮЗ - ТАСИС

**Техническая помощь для
республик в южной части СНГ
и для Грузии - ТРАСЕКА**

ТОРГОВЫЙ И ТРАНСПОРТНЫЙ СЕКТОРА

**СОЗДАНИЕ СИСТЕМЫ УПРАВЛЕНИЯ СОСТОЯНИЕМ
ДОРОЖНОГО ПОКРЫТИЯ
ПРОЕКТ NO.: TELREG 9305**

**ПРОМЕЖУТОЧНЫЙ ОТЧЕТ NO. 2
ЗА ПРОЕКТНЫЙ ПЕРИОД С ИЮЛЯ ПО СЕНТЯБРЬ 1996**

ОКТАБРЬ 1996

**KOCKS CONSULT GMBH
Консалтинговые инженеры
Кобленц / Германия**

в ассоциации с

**ТЕКНЕКОН
Консультанты по экономике
и транспорту
Великобритания**

**ФЕНИКС
Консультанты по
покрытиям
Дания**

ТИТУЛЬНЫЕ СТРАНИЦЫ ОТЧЕТА

Название проекта :	Проект Трасека - Внедрение системы управления дорожными покрытиями
Проект номер :	TELREG 9305
Страна :	Южные республики СНГ и Грузия

Местный оператор	Консультант ЕС
------------------	----------------

Название :	Концерн УЗАВТОЙУЛ	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес :	УЗБЕКИСТАН Ташкент, 700000 ул. Пушкина 68 а	Штегеманнштрассе 32 - 38 56068 Кобленц ГЕРМАНИЯ
Тел. номер :	(3712) 682526 и 361595	xx49 - 261 - 1302-0 (операт) xx49 - 261 - 1302-143 (прямой)
Факс номер :	(3712) 682711	xx49 - 261 - 1302 - 152
Телекс номер :	--	862807
Лицо для контакт.:	Вахид Норматович Азамов Гос. инспектор по автодорогам	Вернер П Вайлер
Подписи :		

Название :	Министерство Транспорта (MoT) Госинститут по проектированию автодорог КИРГИЗДОТТРАНСПРОЕКТ (К)	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес :	Киргизская республика Бишкек 720079 ул. Исанова 42 (MoT)	
Тел. номер :	(3312) 216674 (MoT) 444187 (К)	
Факс номер :	(3312) 213667 (MoT) 444193 (К)	
Телекс номер :	--	
Лицо для контакт.:	Акунов Куван Акунович Начальник департамента автодорог (MoT) Леван М Алибегашвили Директор (К)	
Подписи :		

ТИТУЛЬНАЯ СТР 2

Местный оператор	Консультант ЕС
------------------	----------------

Название	: Министерство транспорта и коммуникаций, Управление автомобильных дорог, (ДоН) Акционерная компания "КАЗДОРНИИ" (К)	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	: КАЗАХСТАН Алматы, 480061 ул. Емцова 9	
Тел. номер	: (3272) 324769 (ДоН) or 400447 (К)	
Факс номер :	: (3272) 324449 (ДоН) or 400819 (К)	
Телекс номер	: --	
Лицо для контакт.:	Амангельды Н. Елгонов Директор департамента(ДоН) Олег А. Красиков Зам директора(К)	
Подписи	:	

Название	: Министерство экономики, Управление транспорта и коммуникаций (DoT&C) Госконцерн АЗЕРАВТОЮОЛ (А)	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	: АЗЕРБАЙДЖАН Баку, 370010 ул. Хаджихекова 72	
Тел. номер	: (8922) 933556 (А) (8922) 930045 (А)	
Факс номер :	:	
Телекс номер	: 142272 YOL	
Лицо для контакт.:	Икрам М. Садыков Начальник управления транспорта и коммуникаций (DoT&C) Шахин Х Хасанов вице президент и управляющий проектом ТРАСЕКА-PMS (А)	
Подписи	:	

ТИТУЛЬНАЯ СТР 3

Местный оператор

Консультант ЕС

Название	:	Концерн Туркменавтоеллари	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	:	ТУРКМЕНИСТАН Ашгабат 744000	
Тел. номер	:	(3632) 245487	
Факс номер :	:	(3632) 255379 и 511678	
Телекс номер	:	--	
Лицо для контакт.:	:	Владимир Володин Вице президент	
Подписи	:		

Название	:	Государственный концерн автомобильных дорог САКАВТОГЗА	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	:	ГРУЗИЯ Тбилиси 380060 ул. Гагарина 29 А	
Тел. номер	:	(99532)376604	
Факс номер	:	376458	
Телекс номер	:	212189	
Лицо для контакт.:	:	Тариэл Мдивнишвили Зам председателя	
Подписи	:		

ТИТУЛЬНАЯ СТР 4

Местный оператор	Консультант ЕС
------------------	----------------

Название	: Министерство по транспорту (MoT) Армянский директорат автомобильных дорог (ARD)	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	: АРМЕНИЯ Ереван	
Тель номер	: (3742) 586601	
Факс номер	: (3742) 151876 or 151830	
Телекс номер	: 212189	
Лицо для контакт.:	Николай Элариан Директор (ARD)	
Подписи	:	

Название	: Министерство транспорта и автодорог ТАДЖИКГИПРОТРАНССТРОЙ	KOCKS CONSULT GMBH Консультирующие инженеры
Адрес	: ТАДЖИКИСТАН 734042 Душанбе ул Ани 14	
Тель номер	: (3772) 215380 или 212020	
Факс номер	: (3772) 212003	
Телекс номер	:	
Лицо для контакт.:	Мирзоев Тимур	
Подписи	:	

ТИТУЛЬНАЯ СТР 5

Дата отчета : 02 октября 1996

Отчет за период : с 01.07.1996 до 30.09.1996

Автор отчета: У. Виллемс, Руководитель группы по проекту (Kocks Consult GmbH)

Группа мониторинг и
оценка ЕС

(фамилия)

(подпись)

(дата)

Представительство ЕС

(фамилия)

(подпись)

(дата)

24/10/96

Бюро ТАСИС

(фамилия)

(подпись)

(дата)

СОДЕРЖАНИЕ:

	Стр
<u>1. РЕЗЮМЕ ПРОЕКТА</u>	2
<u>2. РЕЗЮМЕ О ХОДЕ ОСУЩЕСТВЛЕНИЯ ПРОЕКТА С МОМЕНТА ЕГО НАЧАЛА</u>	5
2.1 Начало предоставления услуг	5
2.2 Мероприятия и ход выполнения проекта	6
<u>3. РЕЗЮМЕ ПЛАНИРОВАНИЯ РАБОТ НА ОСТАЛЬНОЙ ПЕРИОД ПРОЕКТА</u>	7
<u>4.ХОД ВЫПОЛНЕНИЯ ПРОЕКТА В ОТЧЕТНОМ ПЕРИОДЕ</u>	8
4.1 Введение	8
4.2 Мобилизация	9
4.3 Деятельность в течении отчетного периода июль-сентябрь 1996 г.	13
4.4 Создание BMS/PMS (системы управления дорожным мостами/состоянием покрытия)	20
4.5 Таблицы	27
<u>5.ПЛАНИРОВАНИЕ РАБОТ ПО ПРОЕКТУ В СЛЕДУЮЩЕМ ОТЧЕТНОМ ПЕРИОДЕ</u>	39
5.1 Запланированная деятельность	39
5.2 Таблицы	40
<u>ПРИЛОЖЕНИЯ</u>	
1. Биография г-на Циммерманна, г-на Поич	
2. Данные по состоянию дорог, покрытий	
3. Обследования осевой нагрузки	
4. Семинары	

Резюме проекта

Название проекта : Проект Трасека - Создание систем управления состоянием дорожного покрытия

Номер проекта : TELREG 9305

Страна : Республики в южной части СНГ и Грузия

Задачи

проекта: Проект нацелен на ознакомление региональных автодорожных органов с новейшей западной методикой управления состоянием дорожного покрытия. Он призван содействовать уменьшению отставания в области содержания дорог. В центре внимания проекта будет изучение международных транзитных маршрутов и конкретные задачи по следующим трем основным группам.

Технические задачи

- Создание базы данных
 - состояние дорог и мостов
 - интенсивность дорожного движения/осевые нагрузки
 - прогноз интенсивности дорожного движения в будущем
- Разработка, апробирование и уточнение технических аспектов стратегии содержания дорожного покрытия. Создание систем управлением состоянием покрытия в каждом государстве региона.
- Внедрение местными властями западных методов содержания дорог и мостов, а также стандартов дорожной безопасности.
- Анализ норм проектирования дорог

Экономические задачи

- Увеличить ресурсы, имеющиеся в наличии для содержания дорог : реальные затраты, связанные с эксплуатацией дорог пользователями, которые в настоящем вносят плату небольшого размера, и тем самым подкрепить аргументы в пользу периодического получения доходов через взимание платы (налогов) с пользователей дорог.

- Составить описание и провести экономический анализ тех проектов и программ по содержанию дорог, которые могут привлечь интерес международных финансовых учреждений.

Передача технологий

В выполнении всех задач проекта будут участвовать местные сотрудники, которые пройдут обучение по внедряемой методике с тем, чтобы работа продолжалась и по завершении настоящего проекта.

Планируемые результаты:

- Мобилизация ресурсов и начало предоставления услуг
- Изучение имеющихся отчетов и данных по дорогам и мостам
- Закупки и подготовка оборудования к работе
- Ознакомление партнеров в странах-получателях с работой оборудования
- Полевые работы и сбор данных для создания базы данных, а также обучение партнеров на месте
- Предоставление компьютерного и программного обеспечения для системы управления состоянием дорожного покрытия (PMS) и системы управления состоянием мостов (BMS), а также обучение работе с ними
- Семинары о битумно-связующих материалах и об аспектах дорожной безопасности.
- Стоимость и финансирование эксплуатации дорог
- Ознакомительная поездка в Западную Европу

Деятельность по проекту с начала работ

- Подготовка проекта
- Координационные встречи с координационным бюро ТАСИС в Брюсселе
- Начало проведения встреч между координационным бюро ТАСИС и учреждениями-получателями во всех 8 странах.
- Организация материально-технического обеспечения (размещение, офисные помещения, гараж для оборудования, транспорт)

- Семинары для ознакомления с работой оборудования
- Предоставление системы компьютеров и программ для управления состоянием дорожного покрытия (PMS)/состоянием мостов (BMS)
- Совместное с партнерами проведение сбора и оценки данных о состоянии поверхности и покрытия дорог (обучение на месте)
- Сбор данных о транспортно-экономических издержках и затратах на эксплуатацию дорог через получение доступа к существующим базам данных и проведение дополнительных изысканий в рамках настоящего проекта (подсчет транспортного потока, обследования нагрузок на ось автомоб.)
- Сбор данных и оценка состояния мостов совместно с местными партнерами (обучение на месте)
- Семинары о битумно-связующих материалах и о соответствующей технологии: обсуждение имеющейся ситуации, внедрения необходимых усовершенствований (например, в расчет дорожной одежды) и предложений о применении новых технологий (например, повторное использование материалов).
- Семинары по безопасности дорожного движения и проектированию (геометрия дорог, дорожные знаки, содержание зимой)
- Интенсивное обучение местного персонала (PMS/BMS) программам включая ввод данных, создание базы данных, оценка данных.

Дата начала

проекта : 20 декабря 1995 г., по причине зимних условий начало выполнения проекта задержалось до 12 марта 1996 г.

Длительность

проекта : 12 месяцев

2. РЕЗЮМЕ О ХОДЕ ОСУЩЕСТВЛЕНИЯ ПРОЕКТА С МОМЕНТА ЕГО НАЧАЛА

2.1. Начало предоставления услуг

По условиям настоящего Контракта, Консультант должен был приступить к выполнению задач проекта в течении двух недель после вступления Контракта в силу. Дата вступления его в силу была установлена на 7 декабря 1995 г., а начало предоставления консультативных услуг планировалось на 20 декабря 1995 г.

Как описывалось в первоначальном отчете Консультанта (февраль 1996 г.), холодная зимняя погода в государствах на юге СНГ задержала начало предоставления консультативных услуг до середины марта 1996 г. Тем не менее, подготовка к началу предоставления услуг велась - осуществлялось штатное планирование, заключались контракты с представителями проекта с странах-получателях, получались визы, велись закупки и подготовка оборудования к работе, пр.

13 марта 1996 г. сотрудники Консультанта прибыли на место проведения проекта, обеспечили материально-технически средства и ,чтобы наверстать упущенное время приступили к полевым работам по обследованию технического состояния дорог, измерению прогибов покрытия и обследованию дорожной одежды, что является ключевыми видами деятельности перед оценкой, вводом данных и пр. Вторая, дополнительная, группа начала работать в Кавказском регионе в середине апреля 1996 г. До сегодняшнего дня начаты услуги по проекту в 7 из 8 стран.

2.2 МЕРОПРИЯТИЯ И ХОД ВЫПОЛНЕНИЯ ПРОЕКТА

В течении отчетного периода консультативные услуги предоставлялись в Узбекистане, Киргизстане, Азербайджане и Казахстане. Вся работа выполнялась совместно с партнерами соответствующих стран-получателей в виде обучения на месте, которое дополняло семинары и обучение в классе.

Полевые работы и сбор данных

- семинары по ознакомлению с работой оборудования
- перевод технического описания оборудования на русский язык
- подготовка форм и руководств по сбору данных
- сбор и оценка данных о состоянии дорожной поверхности и дорожной одежды с использованием оборудования, предоставленного в рамках проекта
- сбор данных и оценка состояния мостов

Компьютеры и программные системы

- полные комплекты компьютерного оборудования доставлены в 7 стран.
- завершена оптимизация (HDM IV modules, Windows 95) и перевод на русский язык программной системы PMS/BMS.

Аспекты экономики транспорта и расходов на эксплуатацию дорог

- изучение имеющихся отчетов
- сбор данных об интенсивности дорожного движения и данных для оценки транспортных эксплуатационных расходов
- обследование осевой нагрузки
- оценка роста интенсивности дорожного движения
- сбор информации о расходах на содержание и капитальный ремонт дорог

Семинары

- битумно-связующие материалы
- аспекты дорожной безопасности
- стандарты по проектированию дорог

3. РЕЗЮМЕ ПЛАНИРОВАНИЯ РАБОТ НА ОСТАЛЬНОЙ ПЕРИОД ПРОЕКТА

В течении данного отчетного периода консультативные услуги предоставлялись в Узбекистане, Киргизстане, Азербайджане, Казахстане, Грузии и Армении.

В следующем отчетном периоде работа будет включать в себя:

- (i) Начало оказания услуг в Таджикистане и Туркменистане
- (ii) Будут продолжены и соответственно завершены полевые работы и сбор данных по дорогам и автомагистралям.
- (iii) Восемь стран-получателей получат недопоставленное в течении отчетного периода компьютерное оборудование, а также программную систему PMS/BMS.
- (iv) Будет продолжено обучение партнеров использованию оборудования для сбора данных о состоянии дорог и мостов и создания базы данных; с использованием программной системы PMS/BMS.
- (v) Продолжится и полностью завершится сбор данных по интенсивности дорожного движения, будет дана оценка увеличения движения, рассчитаны транспортно-эксплуатационных расходов для определения транспортно-экономических и дорожно-эксплуатационных расходов.
- (vi) Будут продолжены семинары по битумно-связующим материалам и соответствующим технологиям, по аспектам дорожной безопасности, а также стандартам проектирования.
- (vii) Запланирована ознакомительная поездка в Западную Европу, которая будет включать семинары, посещение строительных площадок с демонстрацией
 - системы управления дорогами и мостами
 - подразделений по эксплуатации дорог и мостов (включая зимой)
 - установок по производству битумно-вяжущих продуктов
 - методы повторного применения покрытия
 - аспекты дорожной безопасности

4. ХОД ВЫПОЛНЕНИЯ ПРОЕКТА В ОТЧЕТНОМ ПЕРИОДЕ

4.1 Введение

Как описано ранее, предоставление услуг по проекту задержалось в связи с неблагоприятными погодными условиями в зоне выполнения проекта, а полевые работы начались в середине марта 1996 г. Как сообщалось ранее, в середине апреля 1996 г., в Кавказском регионе приступила к работе вторая/дополнительная группа специалистов Консультанта для того, чтобы наверстать упущенное время, что и было с успехом достигнуто в настоящем отчетном периоде.

Деятельность, проводившаяся Консультантом с июля по сентябрь 1996 г., можно кратко подытожить следующим образом:

(i) Первоначальные встречи с учреждениями-получателями в

- Туркменистане
- Таджикистане

(ii) Начало деятельности в

- Грузии
- Армении

(iii) Продолжение деятельности в

- Азербайджане
- Узбекистане

(iv) Завершение деятельности в

- Киргизстане
- Казахстане

В настоящем отчетном периоде соответствующие административные органы стран-получателей обеспечили необходимое количество сотрудников для всех видов деятельности по Проекту, а в семинарах и курсах обучения, проведенных к настоящему дню, принимала участие обширная аудитория, проявившая большой интерес.

С благодарностью отмечается та любезная помощь, которую предоставляли по всем административным и техническим вопросам координационные бюро ТАСИС.

4.2 Мобилизация сотрудников

Сотрудники консультанта

Консультант организовал проведение работ двумя командами, одна из которых работала в Центральноазиатском, а другая - в Кавказском регионе, что подтвердило свои преимущества для выполнения всех потребностей проекта, и после намерения упущенного времени было принято решение о сохранении в дальнейшем данной структуры организации работ. Для гармонизации подходов и синхронизации деятельности по проекту проводились встречи руководителей двух команд.

В ходе выполнения Проекта, в результате встреч с представителями учреждений-получателей были уточнены требования к предоставлению услуг, и поэтому Консультант считал необходимым несколько видоизменить состав своих сотрудников. Для наиболее эффективной передачи технологии была произведена замена двух профессиональных сотрудников:

- В Проекте стал работать г-н М.У. Циммерман, специалист по асфальту, он внесет свой вклад в виде детального знания материалов, расчетов покрытий, техники нанесения покрытия и современной технологии повторного использования материалов. Г-н Циммерман в течении года выполнял задание по надзору за работами по реконструкции Ташкентского аэропорта, и в связи с этим ему хорошо знакомы материалы и проблемы качества заасфальтированных объектов в зоне проекта. Его краткая биография дается в ПРИЛОЖЕНИИ 1.
- Г-н П.Пойтч, инженер по мостам, имеет опыт нескольких лет работы по анализу состояния мостов и опыт работы с компьютерными системами управления состоянием мостов (BMS); он отвечал за подготовку программной системы BMS для Проекта. Благодаря полученному образованию и опыту работы в бывшем ГДР, г-н Пойтч имеет обширные знания в области расчетов структурных систем, наподобие тех, которые используются в государствах-получателях. Его биография также прилагается в ПРИЛОЖЕНИИ 1.

В число сотрудников Консультанта, работавших в зоне проекта в отчетном периоде, входили:

Управляющий проектом	Вернер П. Вайлер	КОКС КОНСАЛТ ГМБХ
Инженер-автомобилист и руководитель 1-ой группы (Центральная Азия)	Ульрих Виллемс	КОКС КОНСАЛТ ГМБХ
Инженер-автомобилист и руководитель 2-ой группы (Кавказский регион)	Карстен Гризе	КОКС КОНСАЛТ ГМБХ
Экономист-транспортник и инженер автомобильного движения	Роберт А. Смит	ТЕКНЕКОН
Инженер по дефлектометру с падающим грузом и системам управления состоянием покрытия	Кимо Карини	Феникс ППС
Инженер по системам управления состоянием покрытия дефлектометру с падающим грузом	Клаус В. Нильсен	Феникс ППС
Специалист по асфальту	Ханс У. Циммерман	КОКС КОНСАЛТ ГМБХ
Специалист по мостам и системами управления состоянием мостов	Питер Пойтч	КОКС КОНСАЛТ ГМБХ
Инженер по конструкциям	Андрис Мелесис	КОКС КОНСАЛТ ГМБХ
1-ый инженер-координатор	Йоханн Рогальский	КОКС КОНСАЛТ ГМБХ
2-ой инженер-координатор	Йоханн Руоф	КОКС КОНСАЛТ ГМБХ

В связи с вышеупомянутым уточнением услуг по проекту потребовалось видоизменить и первоначальное предлагавшееся распределение времени:

- В связи с особым интересом учреждений-получателей к темам "Семинара по битумно-связующим материалам" был продлен срок задания специалиста по асфальту. Проведенный семинар имел важное значение, напрямую относясь к претворению системы управления состоянием покрытия. В соответствии с потребностями учреждений-получателей в семинар были включены такие темы, как проведение лабораторных испытаний и посещение асфальтных заводов.

- Больше, чем планировалось первоначально, потребовалось времени на подготовку к проведению деятельности, а также на первые встречи в соответствующих 8-ми государствах-получателях.

Однако внесенные изменения были осуществлены за счет других, не столь напряженных позиций Контракта, и Консультант обеспечит, чтобы финансовые аспекты были покрыты из имеющегося бюджета.

Местные эксперты

Оплата работы местных экспертов, предоставленных учреждениями-получателями, шла из Проекта. Для конкретных задач данного проекта экспертиза, лишь за немногими исключениями, имела только в учреждениях-получателях. В участии экспертов учреждений видится большая польза для Проекта, поскольку тем самым экспертиза будет иметься в будущем и для отдела по управлению состоянием покрытия дорог/мостов (PMS/BMS).

Оборудование для полевых работ

(i) Обследование технического состояния дорог

Один комплект оборудования, предоставленный для Проекта в предыдущем отчетном периоде, состоящий из

- дефлектометра с падающим грузом (FWD)
- моста для измерения нагрузки на ось, включая подставные подушки для взвешивания грузовиков с числом осей до трех
- ударного интегратора
- MERLIN
- продольного датчика (измерителя пробега)
- различных малых измерительных приборов и офисного оборудования,

по завершению работ в одном государстве перевозился в другое.

(ii) Обследование технического состояния мостов

Для осмотра мостов Консультант использовал собственное оборудование, состоящее из:

- бетонного испытательного молотка
- устройства для обнаружения расположения арматурных стержней
- лазерного дальномера
- объектива для измерения трещин.

Транспортировка

Для сообщения между государствами и внутри них использовались приобретенные на месте транспортные средства; в то время как для полевых работ и соответственно для сбора данных транспорт арендовался по контрактам, заключенным на месте с соответствующими управлениями-получателями помощи.

4.3 Деятельность в отчетном периоде, с июля по сентябрь 1996 г.

Полевые работы и сбор данных

Полевые работы и сбор данных по дорогами проекта продолжались в соответствии с описанным в предыдущем отчете № 1 о ходе выполнения работ, включая:

- семинары для ознакомления сотрудничающей стороны и проявивших интерес участников из других учреждений и управлений с работой оборудования
- подготовка переводов технических описаний оборудования на русский язык
- подготовка форм и руководств для сбора данных
- сбор и оценка данных о состоянии дорожного покрытия и дорожной одежды.

Образцы собранных данных и их оценка, данных о состоянии дорожной поверхности участка дороги М 39 в Казахстане и данных о поверхности и одежде 30-км пилотного участка дороги в Грузии даются в ПРИЛОЖЕНИИ 2.

Для оценки возможных недостатков и определения класса состояния мостов был произведен осмотр мостов. Для сбора данных и информации, вводимых в систему управления состоянием мостов (BMS) была разработана соответствующая форма осмотра, а также руководство к ней. Форма и руководство даются в ПРИЛОЖЕНИИ 2. Работа оборудования для испытания мостов, применение указанной формы и руководства были продемонстрированы на выбранных мостах, после чего сотрудничающая сторона приступила к собственным испытаниям и оценке состояния дорожного покрытия.

Компьютеры и программные системы PMS/BMS

Проект включает в себя поставки технического и программного обеспечения для системы управления покрытием (PMS) и для системы управления мостами (BMS).

К концу текущего отчетного периода для 6 государств, входящих в проект ТРАСЕКА (Узбекистан, Киргизстан, Казахстан, Азербайджан, Грузия и Армения), было доставлено и передано компьютерное оборудование. Компьютерное оборудование подготовлено к отправке еще в два государства, Таджикистан и Туркменистан.

Компьютерное оборудование, по комплекту для каждого государства-получателя, состояло из:

- компьютера DELL (пентиум 133) с цветным монитором
- лазерного принтера Хьюлет-Паккард Jet 5P
- источника питания (UPS 7001)
- русского варианта Windows 95, установленного на компьютере, инсталляционных дискет и руководств

Программная система, поставленная по проекту ТРАСЕКА - PHOENIX - RoSy - PMS/BMS, была адаптирована к "Windows 95" и вобрала компоненты HDM IV (экономика/VOC), в соответствии с последним словом техники; после всестороннего обучения, программная система была установлена в отчетном периоде в 3-х государствах (Узбекистан, Киргизстан, Казахстан).

Программа обучения PMS/BMS (система управления состоянием дорожного покрытия и мостов) охватывала следующие основные темы и проводилась в 7 этапов:

1. Семинар по ознакомлению с RoSy PMS/BMS
2. Ввод данных, собранных на пилотных участках дорог (PMS) и отобранных мостов (BMS), соответственно
3. Установочные параметры для расчетов (PMS)
4. Экономические расчеты данных (также обсуждение теории и философии программы PMS)
5. Ввод данных из имеющихся баз данных по дорогам, а также из паспорта мостов
6. Обсуждение возможности применения имеющихся данных для PMS и дальнейшего использования PMS.

На 3-ем этапе можно задать большой диапазон моделей. Для 8-ми государств, охваченных проектом ТРАСЕКа, был создан стандартный набор; было обсуждено и продемонстрировано видоизменение отдельных моделей для каждого государства при помощи отдельных данных (развитие интенсивности перевозок, ухудшение состояния дорог и пр.).

Экономика транспорта и стоимостные аспекты использования дорог

В Азербайджане, Грузии и Армении были проведены полевые работы и сбор данных. Некоторые из собранных данных уже проанализированы, а остальные находятся на этапе анализа, включая:

- Данные классификационного подсчета объемов
- Данные подсчета интенсивности перевозок во временной протяженности, при наличии таковых
- Данные обследования места происхождения/назначения грузовиков при международных перевозках
- Данные обследования нагрузки на ось
- Ввод данных для анализа эксплуатационных затрат транспортных средств
- Информация о тенденциях расходов на содержание и реконструкцию дорог
- Состояние дорожной сети и расходы при использовании дорог

Помимо различных отчетов по изучаемым странам, составленных Всемирным Банком, ЕБРР, другими международными финансовыми учреждениями, и отчетов консультантов по конкретным проектам, перечисленных в предыдущем отчете о ходе выполнения работ, были изучены следующие дополнительные документы:

- Отчеты сотрудников Всемирного Банка с оценкой транспортных проектов в Армении и Грузии
- "Экономический обзор и работа банков", составленный Азиатским банком развития для Казахстана
- "Экономический обзор и работа банков", составленный Азиатским банком развития для Киргизстана.

Были собраны и проанализированы результаты классификационных подсчетов объемов, выполненные в последние годы автодорожными органами и консультантами на главных внутри- и межгосударственных дорогах в Азербайджане, Армении и Грузии. Помимо этого был сделан классификационный подсчет объемов

в трех местах Грузии, где имелись недостаточные данные подсчета объемов движения за последний период, при сравнении с другими странами, входящими в проект ТРАСЕКА.

Как упоминалось в первом отчете о ходе выполнения работ, классификация типов грузовиков, использованная для классификационного подсчета объемов в изучаемых странах, основана скорее на брутто-весе автотранспорта, чем на конфигурации оси. Исключением является Армения, где были применены конфигурации по типу оси, использованная в "Обследовании автомагистралей Армении", проведенном ТАСИС в 1994 г. В других же странах классификация грузовых перевозок по типу транспорта была заменена на классификацию на основе конфигурации оси, в соответствии с требованиями под-модели эксплуатационных затрат транспорта НДМ-III.

Были собраны дополнительные сведения о регистрации автотранспорта по типу автомобилей. Однако ГАИ Армении отказалась предоставить информацию такого рода без разрешения Министерства внутренних дел, а разрешения не поступило. Поэтому Консультанту придется дать свою оценку размера автопарка Армении. Система классификации транспорта, используемая ГАИ в Азербайджане и Грузии для статистики зарегистрированного транспорта, схожа с системами классификации в других государствах проекта ТРАСЕКИ.

Были выполнены обследования нагрузки на ось длительностью в два дня, их результаты проанализированы. Следующие места были выбраны для проведения данных обследований:

- Азербайджан - на 37 км к югу от Баку, на дороге М3, соединяющей Баку и Астарту (на границе с Ираном)
- Грузия - на 25 км к западу от Тбилиси, на дороге S 1, соединяющей Тбилиси, Кутаиси, Сенаки и идущей на запад.
- Армения - на дороге М 4, к югу от Еревана.

Эти обследования и проводившиеся одновременно с ними обследования места отправки/назначения грузовиков для международных перевозок проводились в течении двух дней. Были проанализированы результаты двух обследований нагрузки на ось, проведенных в Азербайджане и Грузии. Были подтверждены выводы предыдущих обследований в Узбекистане, Киргизстане и Казахстане относительно того, что нагрузки транспорта здесь значительно ниже, чем это обычно имеет место на западе и в большинстве развивающихся стран, а грузовики для международных

перевозок, движущиеся по автодорожной сети стран ТРАСЕКА, имеют значительно больший вес, чем грузовики производства СНГ. Результаты статистического анализа проведенных обследований нагрузки на ось приведены в ПРИЛОЖЕНИИ 3 к настоящему отчету.

Для оценки роста интенсивности движения были проанализированы имеющиеся записи подсчетов объемов в исторической динамике. Обнаружилось, что в 90-е гг. в Азербайджане и Грузии произошло значительное снижение объемов перевозок, что явилось результатом резкого сокращения экономической активности в течении последних пяти лет. Однако предстает, что начало восстановления экономической активности в Армении с 1994 г. сопровождается резким ростом объемов движения.

Консультант изучил возможность использования прогнозов объемов движения, которые будут сделаны региональным проектом по прогнозу перевозок ТРАСЕКА. Однако в результате обсуждений с "В.С. Аткинс Интернешенл", одной из двух консультативных фирм, занятых выполнением данного проекта, обнаружилось, что данные прогнозы не будут готовы до самого конца 1997 г., что окажется слишком поздним сроком для того, чтобы использовать их в проекте ТРАСЕКА системы управления состоянием покрытия. Интенсивность движения придется спрогнозировать в рамках ресурсов проекта PMS, используя имеющуюся информацию о перспективах макроэкономического роста и прогнозы перевозок, полученные в ходе консультативных изучений последнего времени, перечисленных в первом отчете о ходе выполнения работ.

Копии всех данных о перевозках, собранных и проанализированных в ходе данного проекта, будут предоставлены консультантам, выполняющим региональный проект прогнозирования движения ТРАСЕКА. Эта информация уже была предоставлена проекту ТРАСЕКА через г-на М.Симса из "Tractebel Development".

Последние оценки эксплуатационных затрат транспортных средств в странах ТРАСЕКА основываются на применении под-модели эксплуатационных затрат транспортных средств НДМ-III (VOCM). Эта же модель используется в данном проекте, полевые работы в основном были связаны с уточнением предыдущих вводимых данных по эксплуатационным расходам транспортных средств.

Были получены оценки эксплуатационных затрат по шести категориям репрезентативных видов транспорта, включая:

- пассажирские легковые автомобили
- служебные машины (миниавтобусы, пикапы и пр.)
- большегрузные автобусы
- 2-х осевые грузовики
- 3-х осевые грузовики
- грузовики с числом осей более 3-х

Результаты HDM-III VOСM были получены для каждого репрезентативного типа автотранспорта в виде уравнений, где эксплуатационные затраты соотнесены с неровностями поверхности. Эти уравнения для каждого типа транспорта и страны были введены в модели системы управления состояние покрытия для каждой страны.

В первом отчете о ходе выполнения работ констатировалось, что данные о количестве происшествий будут неадекватными для количественного выражения аварийных затрат, если масштабы исследования и анализа не будут выходить за рамки данного проекта. Дальнейшие полевые работы в Закавказье подтвердили первоначальные результаты. Из всех посещенных стран только Армения приступила к решению проблемы дорожной безопасности, поручив провести полномасштабное изучение дорожной безопасности.

Была собрана информация об уровне расходов на содержание и реконструкцию автомагистралей в последний период. В 90-х гг. произошло резкое падение этих расходов в реальном выражении, которые ни коим образом даже не приближаются к необходимому уровню.

Через восемь месяцев после начала проведения работ, в середине марта 1996 г., должно быть завершено изучение затрат и финансирования использования дорог, соответствующий отчет ожидается в ноябре 1996г.

Для изучения затрат и финансирования использования дорог была собрана информация о характере и использовании межгосударственной и, что еще более важно, внутригосударственной автодорожной сети в каждой стране. Целью является разбивка дорожной сети в каждой стране по типу покрытия, расчетным стандартам (по прочности покрытия) и размаху перевозок.

Семинары

Помимо вышеуказанных семинаров по ознакомлению с оборудованием, были проведены семинары и посещения мест по вопросам:

- Битумные связующие материалы, состоящие из следующих основных тем
 - Материалы: существующее положение дел с битумом, заполнителями, асфальтовой продукцией и необходимость внесения усовершенствований
 - Расчеты покрытия: существующие стандарты по асфальтобетонным (АС) покрытиям, стандарты/методы расчетов в Европе и Северной Америке
 - Контроль за качеством, требования к лабораторным испытаниям почв и материалов
 - Реконструкция/усиление/укрепление асфальтобетонных покрытий, техника нанесения покрытия, оборудование
 - Техника повторного использования материалов и оборудования для асфальтобетона

- Аспекты дорожной безопасности и расчетов дорог, состоявшие из следующих основных тем:
 - геометрические характеристики дорог: горизонтальный и вертикальный профили, поперечное сечение (дорога/ширина полос), примыкания/пересечения
 - сигнализация: дорожные знаки и маркировка
 - содержание дорог зимой
 - информирование населения/программы информирования
 - применение в жизнь регулирующих правил

Подробности тем вышеприведенных семинаров даются в ПРИЛОЖЕНИИ 4.

В настоящий момент готовится подробная оценка соответствующих стандартов в государствах-получателях и предпринимается ее сравнение с европейскими и западными стандартами, они будут представлены в отчете в ноябре 1996 г.

4.4 Создание BMS/PMS (системы управления мостами/состоянием покрытия)

В предыдущем отчете о ходе выполнения работ № 1 давалась информация о существующих структурах организации/управления и об идущей реорганизации по созданию системы PMS/BMS в отдельных государствах-получателях.

В течении отчетного периода о ходе выполнения работ была собрана более подробная информация по шести государствам-получателям, которая приводится в таблицах ниже.

Регион: Центральн. Азия Страна 1, Узбекистан			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	1.1 Решения администрации для внедрения PMS/BMS 1.2 Определение ответственных институтов/управлений 1.3 Организация структуры для сбора данных и содержания централизованной базы данных 1.4 Получение бюджетных средства для группы PMS/BMS	1.1 Подтверждено Кабинетом Министров 1.2 Сформирована группа PMS/BMS в УЗАВТОЙУЛ 1.3 Со дня провозглашения независимости децентрал. система, в настоящее время преобразования соответственно требованиям PMS/BMS 1.4 Бюджет имеется в распоряжении и как в 1.3 в наст. время реорганизов	1.1 соответств. 1.2 соответств. 1.3 Соответств. не полностью рекомендована при реорганизации совместная техническая работа 1.4 также как и в 1.3
2.Персональные структуры	2.1 Получение в распоряжение квалифицированных специалистов 2.2 Обучение сбору данных, их оценки и PMS/BMS программе. 2.3 Развитие персонала	2.1 PMS/BMS группы от 3 до 5 инженеров 2.2 Проведено обучение по всем аспектам в настоящем проекте ТРАСЕКА 2.3 В рамках реорганизации включены также области..	2.1 соответств. 2.2 Рекомендуется продолжение обучения для улучшения системы сбора данных и содержания базы данных, оптимизац. программы и составление рекомендаций по содержанию. 2.3 Обучение под 2.2 должно быть расширено, с тем чтобы провести обучение группы спец., которая в последствии будет заниматься обучен. специалистов по областям.
3. Технические структуры	3.1 Получение в распоряжение помещения для группы PMS/BMS 3.2 Компьютерное и программное обеспечение PMS/ BMS 3.3 Транспорт для полевых работ и сбора данных 3.4 Приборы и оборудование для обследован. дорог и покрытий	3.1 Помещения УЗАВТОЙУЛ 3.2 Было с настоящим проектом доставлено 3.3 Мало автомобилей в распоряжении, но в настоящий момент ситуация меняется 3.4 Не имеется в распоряжении (только 1 компл. приборов / оснащ	3.1 соответств. 3.2 соответств. 3.3 Еще не соответств., но в связи с идущими преобразован. ожидается улучшение, рекоменд. наблюден 3.4 Доставка приборов/оборудования по окончании преобраз. (Пун.1.3и 1.4)

Регион: Центральн. Азия Страна 2, Киргизстан			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	<p>1.1 Решения администрации для внедрения PMS/BMS</p> <p>1.2 Определение ответственных институтов/управлений</p> <p>1.3 Организация структуры для сбора данных и содержания централизованной базы данных</p> <p>1.4 Получение бюджетных средства для группы PMS/BMS</p>	<p>1.1 Подтверждено Министерством транспорта</p> <p>1.2 Сформирована группа PMS/BMS в КИРГИЗДОТТРАНСПРОЕКТ</p> <p>1.3 В настоящее время преобразов. соответств. требованиям. В серед. октября состоится заседание институтов/управлен. с минтранс. для разработки предл. по улучшен.</p> <p>1.4 В распоряжен. имеется очень малая часть бюджета и как в 1.3 запланир. последующие улучшения</p>	<p>1.1 соответств.</p> <p>1.2 соответств.</p> <p>1.3 Соответств. не полностью убедительно рекомендуется при реорганизации совместная техническая работа</p> <p>1.4 также как и в 1.3</p>
2.Персональные структуры	<p>2.1 Получение в распоряжение квалифицированных специалистов</p> <p>2.2 Обучение сбору данных, их оценки и PMS/BMS программе.</p> <p>2.3 Развитие персонала</p>	<p>2.1 PMS/BMS группы от 3 до 5 инженеров</p> <p>2.2 Проведено обучение по всем аспектам в настоящем проекте ТРАСЕКА</p> <p>2.3 Не имеется информации</p>	<p>2.1 соответств.</p> <p>2.2 Обучение установки системы для сбора данных, содержания базы данных, оптимизац программы и составлен рекомендаций по содержанию</p> <p>2.3 Рекомендуются дальнейшие наблюдения</p>
3. Технические структуры	<p>3.1 Получение в распоряжение помещения для группы PMS/BMS</p> <p>3.2 Компьютерное и программное обеспечение PMS/ BMS</p> <p>3.3 Транспорт для полевых работ и сбора данных</p> <p>3.4 Приборы и оборудование для обследован. дорог и покрытий</p>	<p>3.1 КИРГИЗДОТТРАНСПРОЕКТ переезжает в другое здание, где для ТРАСЕКА PMS/BMS предусмотрено помещение.</p> <p>3.2 Было с настоящим проектом доставлено</p> <p>3.3 Не имеется автомобилей в распоряжени</p> <p>3.4 Не имеется в распоряжении (только 1 компл. приборов / оснащ</p>	<p>3.1 соответств.</p> <p>3.2 соответств.</p> <p>3.3 После выполнения пункта 3.4 рекомендуется к финансированию</p> <p>3.4 Доставка приборов/оборудования по окончании преобраз. (Пун.1.3и 1.4)</p>

Регион: Центральн. Азия Страна 3, Казахстан			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	1.1 Решения администрации для внедрения PMS/BMS 1.2 Определение ответственных институтов/управлений 1.3 Организация структуры для сбора данных и содержания централизованной базы данных 1.4 Получение бюджетных средства для группы PMS/BMS	1.1 Подтверждено Министерством транспорта и коммуникаций 1.2 Существует группа PMS/BMS в КАЗДОРНИИ 1.3 Существует централизованная база данных и система сбора данных 1.4 Бюджет имеется в распоряжении	1.1 соответств. 1.2 соответств. 1.3 соответств. 1.4 соответств.
2.Персональные структуры	2.1 Получение в распоряжение квалифицированных специалистов 2.2 Обучение сбору данных, их оценки и PMS/BMS программе. 2.3 Развитие персонала	2.1 PMS/BMS группы от 3 до 5 инженеров 2.2 Проведено обучение по всем аспектам в настоящем проекте ТРАСЕКА 2.3 Работает централизованная система	2.1 соответств. 2.2 Рекомендуется продолжение обучения для улучшения системы сбора данных и содержания базы данных, оптимизац. программы и составление рекомендаций по содержанию. 2.3 соответств.,
3. Технические структуры	3.1 Получение в распоряжение помещения для группы PMS/BMS 3.2 Компьютерное и программное обеспечение PMS/ BMS 3.3 Транспорт для полевых работ и сбора данных 3.4 Приборы и оборудование для обследован. дорог и покрытий	3.1 Помещения КАЗДОРНИИ 3.2 Было с настоящим проектом доставлено 3.3 Автомобили имеются в распоряжении 3.4 Приборы/оснащения имеются в распоряжении, но не все подходят для использования PMS/BMS и некоторые из них в неудовлетвор. состоянии (только 1 компл. приборов / оснащ по всему проекту для 8 стран)	3.1 соответств. 3.2 соответств. 3.3 соответств. 3.4 Доставка приборов/оборудования как можно скорее

Регион: Кавказ Страна 1, Азербайджан			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	1.1 Решения администрации для внедрения PMS/BMS 1.2 Определение ответственных институтов/управлений 1.3 Организация структуры для сбора данных и содержания централизованной базы данных 1.4 Получение бюджетных средства для группы PMS/BMS	1.1 Подтверждено в Министерстве экономики и АЗЕРАВТОЮОЛ 1.2 Сформирована группа PMS/BMS в АЗЕРАВТОЮОЛ 1.3 Существует централизованная система сбора данных Но никаких признаков улучшения организации соответственно требованиям PMS/BMS 1.4 Бюджет имеется в распоряжении для подсчета транспорта, но не для обследования дорог	1.1 соответств. 1.2 соответств. 1.3 Соответств. не полностью рекомендована при реорганизации совместная техническая работа 1.4 также как и в 1.3
2.Персональные структуры	2.1 Получение в распоряжение квалифицированных специалистов 2.2 Обучение сбору данных, их оценки и PMS/BMS программе. 2.3 Развитие персонала	2.1 PMS/BMS группы от 3 до 5 инженеров 2.2 В октябре/ноябре 1996 будет проведено обучение по всем аспектам настоящего проекта ТРАСЕКА 2.3 Оценка после проведения обучения в октябре/ноябре.	2.1 соответств. 2.2 Рекомендации после проведения обучения в октябре/ноябре 1996 2.3 также как и в 2.2
3. Технические структуры	3.1 Получение в распоряжение помещения для группы PMS/BMS 3.2 Компьютерное и программное обеспечение PMS/ BMS 3.3 Транспорт для полевых работ и сбора данных 3.4 Приборы и оборудование для обследован. дорог и покрытий	3.1 Помещения АЗЕРАВТОЮОЛ 3.2 Было с настоящим проектом доставлено 3.3 Мало автомобилей в распоряжении, но в настоящий момент ситуация меняется 3.4 Не имеется в распоряжении (только 1 компл. приборов / оснащ по всему проекту для 8 стран)	3.1 соответств. 3.2 соответств. 3.3 После выполнения пункта 3.4 рекомендуется к финансированию 3.4 Доставка приборов/оборудования по окончании преобразований

Регион: Кавказ Страна 2, Грузия			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	1.1 Решения администрации для внедрения PMS/BMS 1.2 Определение ответственных институтов/управлений 1.3 Организация структуры для сбора данных и содержания централизованной базы данных 1.4 Получение бюджетных средства для группы PMS/BMS	1.1 Подтверждено Министерством по экономики и САКАВТОГЗА 1.2 Сформирована группа PMS/BMS в Гос концерне САКАВТОГЗА 1.3 Во время войны разрушены существующие база данных и организационная структура. В настоящее время проводятся некоторые мероприятия по преобразован. 1.4 В распоряжен. имеется очень малая часть бюджета, запланир. улучшен.	1.1 соответств. 1.2 соответств. 1.3 Соответств. не полностью убедительно рекомендуется при реорганизации совместная техническая работа 1.4 также как и в 1.3
2.Персональные структуры	2.1 Получение в распоряжение квалифицированных специалистов 2.2 Обучение сбору данных, их оценки и PMS/BMS программе. 2.3 Развитие персонала	2.1 PMS/BMS группы от 3 до 5 инженеров 2.2 Проведено обучение по всем аспектам в настоящем проекте ТРАСЕКА 2.3 Не имеется информации	2.1 соответств. 2.2 Обучение установки системы для сбора данных, содержания базы данных, оптимизац программы и составлен рекомендаций по содержанию 2.3 Рекомендуются дальнейшие наблюдения
3. Технические структуры	3.1 Получение в распоряжение помещения для группы PMS/BMS 3.2 Компьютерное и программное обеспечение PMS/ BMS 3.3 Транспорт для полевых работ и сбора данных 3.4 Приборы и оборудование для обследован. дорог и покрытий	3.1 САКАВТОГЗА переезжает в другое здание, где для ТРАСЕКА PMS/BMS предусмотрено помещение. 3.2 Было с настоящим проектом доставлено 3.3 Не имеется автомобилей в распоряжении 3.4 Не имеется в распоряжении (только 1 компл. приборов / оснащ по всему проекту для 8 стран)	3.1 соответств. 3.2 соответств. 3.3 После выполнения пункта 3.4 рекомендуется к финансированию 3.4 Доставка приборов/оборудования по окончании преобразований.

Регион: Кавказ Страна 3, Армения			
	ТРЕБОВАНИЯ	ОЦЕНКА	РЕКОМЕНДАЦИИ
1.Административные структуры	1.1 Решения администрации для внедрения PMS/BMS 1.2 Определение ответственных институтов/управлений 1.3 Организация структуры для сбора данных и содержания централизованной базы данных 1.4 Получение бюджетных средства для группы PMS/BMS	1.1 Подтверждено Министерством транспорта 1.2 Существует группа PMS/BMS в Армянском директорате по автодорогам 1.3 Существует централизованная база данных и система сбора данных 1.4 Бюджет имеется в распоряжении через другие проекты Интернационального финансирования	1.1 соответств. 1.2 соответств. 1.3 соответств. 1.4 в настоящее время соответств.
2.Персональные структуры	2.1 Получение в распоряжение квалифицированных специалистов 2.2 Обучение сбору данных, их оценки и PMS/BMS программе. 2.3 Развитие персонала	2.1 PMS/BMS группы от 3 до 5 инженеров 2.2 Проведено обучение по всем аспектам в настоящем проекте ТРАСЕКА 2.3 Работает централизованная система	2.1 соответств. 2.2 Рекомендуется продолжение обучения для улучшения системы сбора данных и содержания базы данных, оптимизац. программы и составление рекомендаций по содержанию. 2.3 соответств..
3. Технические структуры	3.1 Получить в распоряжение помещения для группы PMS/BMS 3.2 Компьютерное и программное обеспечение PMS/ BMS 3.3 Транспорт для полевых работ и сбора данных 3.4 Приборы и оборудование для обследован. дорог и покрытий	3.1 Помещения Армянского директората автодорог 3.2 Было с настоящим проектом доставлено 3.3 Автомобили имеются в распоряжении 3.4 Приборы/оснащения имеются в распоряжении, но не все подходят для использования PMS/BMS и некоторые из них в неудовлетвор. состоянии (только 1 компл. приборов / оснащ по всему проекту для 8 стран)	3.1 соответств. 3.2 соответств. 3.3 соответств. 3.4 Доставка приборов/оборудования как можно скорее

4.5 Таблицы

Выполненные в государствах работы по проекту в краткой форме приведены в таблицах ниже. Вся работа велась в виде обучения на месте, партнерами совместно со специалистами Консультанта, и/или в виде выполнения отдельных задач, ставившихся после прохождения обучения.

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 1					
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH									
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)													
№	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ								
		(за период с июля 1996 по сентябрь 1996)			ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страна партнер		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ		
		7	8	9	Заплан	Выполн	Запланир	Выполн	Запланир	Выполн	Запланир	Выполн	
	Регион: Центральная Азия Страна 1, Узбекистан												
6.	ДПВ измерения+оценка												
6.2	Измерение+ввод данных по ДПВ	X X			1 нед	1 нед	1 нед	1 нед	ДПВ	ДПВ			
6.3	Анализ покрытий	X X			0.5 нед	0.5 нед	0.5 нед	0.5 нед					
9.	Транспортные расходы(ИДМ)												
9.3	Калькуляц. транспорт. расходов	X X			1 нед	1 нед							
10.	Обсл. сост мост+опред станд.												
10.1	Сбор данных по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед					
10.2	Инспектирование мостов			X X	0.5 нед	0.5 нед	3 нед	3 нед					
10.3	Состав. существ. стандар по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед					
11.	Стратегия содержания мостов												
11.1	Оценка сущ методов содержания			X X	1 нед	1 нед	1 нед	1 нед					
11.2	Дискус по вопросам содержания			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед					
11.3	Оценка стоим. содерж.+ ремонта			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед					
12.	Наладка PMS + BMS												
12.1	Установка системы			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед	PMS/BMS	PMS/BMS			
12.2	Ввод данных в PMS/BMS			X X	1.5 нед	1.5 нед	1.5 нед	1.5 нед	прогр	прогр			
13.	Модель оптимизации PMS/BMS		X X		1 нед	1 нед	2 нед	2 нед					
14.	Обучение+Семинары												
14.3	Обучение+семинар PMS/BMS			X X	1 нед	1 нед	1 нед	1 нед	учебн матер	учебн матер			
14.4	Семинар по технол. содер мостов			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед					
				Всего	10.5	10.5	14.0	14.0					

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 2				
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH								
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)												
No	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ (за период с июля 1996 по сентябрь 1996) Месяцы			ЗАТРАТЫ							
					ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страна партнер		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ	
	Регион: Центральная Азия Страна 2, Киргизия	7	8	9	Заплан	Выполн	Запланир	Выполн	Запланир	Выполн	Запланир	Выполн
23.	Транспортные расходы (НДМ)											
23.3	Калькуляц. транспортн. расходов	X X			1 нед	1 нед						
24.	Обсл. сост мост+опред стандар.											
24.1	Сбор данных по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед				
24.2	Инспектирование мостов			X	2 нед	2 нед	3 нед	3 нед				Оборудов для тестир мостов
24.3	Состав. существ стандар по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед				
25.	Стратегия содержания мостов											
25.1	Оценка суш методов содержания			X	1 нед	1 нед	1 нед	1 нед				
25.2	Дискус по вопросам содержания			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
25.3	Оценка стоим. содерж.+ ремонта			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
26.	Наладка PMS + BMS											
26.1	Установка системы			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед	PMS/BMS прогр		PMS/BMS прогр	
26.2	Ввод данных в PMS/BMS			X X	1.5 нед	1.5 нед	1.5 нед	1.5 нед				
27.	Модель оптимизации PMS	X X		X	1 нед	1 нед	2 нед	2 нед				
28.	Обучение+Семинары											
28.2	Семинар по дор безоп и проектиров			X	0.2 нед	0.2 нед	0.2 нед	0.2 нед	учебн матер		учебн матер	
28.3	Обучение+семинар PMS/BMS			X X	1 нед	1 нед	1 нед	1 нед	учебн матер		учебн матер	
28.4	Семинар по технол. содерж мост			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
				Всего	10.7	10.7	12.7	12.7				

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 3				
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH								
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)												
No	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ (за период с июля 1996 по сентябрь 1996) Месяцы			ЗАТРАТЫ							
		7	8	9	ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страна партнер		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ	
	Регион: Центральная Азия Страна 3, Казахстан				Заплан	Выполн	Запланир	Выполн	Запланир	Выполн	Запланир	Выполн
32.	Обслед сост дорог+опред станд											
32.1	Определен неровн.+обслед сост	X X X			1.5 нед	1.5 нед	1.5 нед	1.5 нед	Толккомер измер дист авто	Толккомер измер дист авто		
32.2	Рассм существ станд проектир.			X	0.5 нед	0.5 нед	--	0.5 нед		Мерлин		
36.	Дороги+эксплуат. расходы											
36.1	Оценка стоимостей содержан.		X		0.2 нед	0.2 нед	1 нед	1 нед				
37.	Транспортные расходы(НДМ)											
37.3	Калькулир. транспортн. расходов	X X			1.5 нед	1.5 нед						
38.	Обсл. сост мост+опред стандар.											
38.1	Сбор данных по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед		Оборудов для тестир мостов		
38.2	Инспектирование мостов			X X	2 нед	2 нед	3 нед	3 нед				
38.3	Состав. существ стандар по мостам			X	0.5 нед	0.5 нед	1 нед	1 нед				
39.	Стратегия содержания мостов											
39.1	Рассм существ методов содержан			X	1 нед	1 нед	1 нед	1 нед				
39.2	Дискус по вопросам содержания			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
39.3	Оценка стоим. содерж.+ ремонта			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
40.	Наладка PMS + BMS											
40.1	Установка системы			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед	PMS/BMS	PMS/BMS		
40.2	Ввод данных в PMS/BMS			X X	1.5 нед	1.5 нед	1.5 нед	1.5 нед	прогр	прогр		
41.	Модель оптимизации			X	1 нед	1 нед	2 нед	2 нед				
42.	Обучение+Семинары											
42.2	Семинар по безопасности движ.			X	0.2 нед	0.2 нед	0.2 нед	0.2 нед	учебн матер	учебн матер		
42.3	Обучение+семинар PMS/BMS			X X	1 нед	1 нед	1 нед	1 нед				
42.4	Семинар по технол. содерж мост			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
Всего					13.4	13.4	15.2	15.7				

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 4				
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH								
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)												
No	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ (за период с июля 1996 по сентябрь 1996) Месяцы			ЗАТРАТЫ							
		7	8	9	ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страна партнер		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ	
	Регион Центральная Азия				Заплан	Выполн	Запланир	Выполн	Запланир	Выполн	Запланир	Выполн
	Страна 4, Туркменистан											
43.	Встреча ознакомление	X			0.5 нед	0.5 нед						
	Страна 5, Таджикистан											
44.	Встреча ознакомление			X	1 нед	1 нед						
	Регион Кавказ											
	Страна 1, Азербайджан											
75.	Исслед трансп потока+оценка											
75.2	Трансп поток+измерен осев нагр		X X X		0.5 нед	1.0 нед	1 нед	1 нед	Опред осев нагр	Опред осев нагр		
75.3	Прогноз транспортн движения			X X X	1.5 нед	1.0 нед						
76.	ДПВ измерения+оценка											
76.1	Выбор отдельн участ дорог		X		0.5 нед	0.5 нед	0.5 нед	0.5 нед	ДПВ	ДПВ		
76.2	Измерение+ввод данных по ДПВ			X X X	1 нед	1 нед	1 нед	1 нед				
76.3	Анализ покрытий			X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
77.	Стратегия содержания											
77.1	Состав существ меропр по содеран	X			0.5 нед	0.5 нед	0.5 нед	0.5 нед				
77.2	Предлож по стратег содержания	X			0.5 нед	0.5 нед	0.5 нед	0.5 нед				
79.	Транспорт расходы (НДМ)											
79.1	Классификац автомоб для НДМ		X		0.5 нед	0.5 нед	1 нед	1 нед				
79.2	Эконом+финансов стоим по транс			X X X	1.5 нед	1.5 нед	2 нед	2 нед				
79.3	Калькул транспорт расходов			X	0.2 нед	0.2 нед						
					Всего	8.2	8.2	7.0	7.0			

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 5				
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH								
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)												
№	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ (за период с июля 1996 по сентябрь 1996) Месяцы			ЗАТРАТЫ							
		7	8	9	ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страна партнер		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ	
	Регион Кавказ Страна 2, Грузия				Заплан	Выполн	Запланир	Выполн	Запланир	Выполн	Запланир	Выполн
86.	Стратегия сбор данных	X			0.5 нед	0.5 нед						
86.1	Подгот мест эксперт, бюро	X X			1 нед	1 нед	2 нед	2 нед				
86.2	Обработка суц. базиса данных	X X	X									
87.	Расположение дорожной сети		X		0.5 нед	0.5 нед	0.5 нед	0.5 нед				
88.	Обслед сост дорог+опред станд								Толчкомер	Толчкомер		
88.1	Определ неровн.+ обслед состоян		X X X X X	X X	4 недс	4 нед	4 нед	4 нед	измер дист авто	измер дист авто		
88.2	Рассм существ стандарт проектир	X X			1 нед	1 нед	--	1 нед	Мерлин			
89.	Исслед трансп потока+оценка											
89.1	Анализ суц дан по трансп потоку		X X	X	1 нед	1 нед	2 нед	2 нед				
89.2	Трансп поток+измерен осев агруз		X		0.5 нед	0.5 нед	1 нед	1 нед	Опред осев нагр	Опред осев нагр		
89.3	Прогноз транспортн движения		X		X X	1.5 нед	1.5 нед					
90.	ДПВ измерения+оценка								ДПВ	ДПВ		
90.1	Выбор типичных уч-ков дорог		X X		0.5 нед	0.5 нед	0.5 нед	0.5 нед				
90.2	Измерение+ввод данных поДПВ			X X X	1 нед	1 нед	1 нед	1 нед				
90.3	Анализ покрытий			X X	0.5 нед	0.5 нед	0.5 нед	0.5 нед				
91.	Стратегия содержания											
91.1	Состав суц меропр по содержан		X X		0.5 нед	0.5 нед	0.5 нед	0.5 нед				
91.2	Предлож. по стратегии содержан		X X		0.5 нед	0.5 нед	0.5 нед	0.5 нед				
92.	Дороги+эксплуатац расходы											
92.1	Оценка стоимостей содержания	X			0.2 нед	0.2 нед	1 нед	1 нед				
93.	Транспорт расходы (HDM)											
93.1	Классификац автомоб для HDM			X	0.5 нед	0.5 нед	1 нед	1 нед				
93.2	Эконом+финансов стоим по транс			X X	1.5 нед	1.5 нед	2 нед	2 нед				
93.3	Калькул транспорт расходов			X X	1 нед	1 нед						
Всего					16.2	16.2	16.5	17.5				

ОТЧЕТ ВЫПОЛНЕНИЯ ПО ПРОЕКТУ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Номер проекта: TELREG 9305		Страны: Южные республики СНГ и Грузия				Форма 2.2, Стр.: 6				
Плановый период : 07/96 - 09/96		Составлено: 10/1996		Консультант Европейского союза: KOCKS CONSULT GmbH								
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)												
№	ПРОВЕДЕННЫЕ МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ (за период с июля 1996 по сентябрь 1996) Месяцы			ЗАТРАТЫ							
		7	8	9	ПЕРСОНАЛ Консультант ЕС		ПЕРСОНАЛ Страны партнера		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ		ДРУГОЕ	
	Регион Кавказ Страна 3, Армения				План	Выполн	План	Выполн	План	Выполн	План	Выполн
99.	Встреча ознакомление	X X			1 нед	1 нед						
100.	Стратегия сбор данных											
100.1	Подгот мест эксперт, бюро			X	0.5 нед	0.5 нед						
100.2	Обработка сущ. базиса данных			X X	1 нед	1 нед	2 нед	2 нед				
101.	Расположение дорожной сети				0.5 нед	0.5 нед	0.5 нед	0.5 нед				
102.	Обслед сост дорог+опред станд											
102.1	Определ неровн.+ обслед состоян				X X X	2 нед	2 нед	1 нед	1 нед	толчкомер измер дистан, автомоб	толчкомер измер дистан, авто Мерлин	
103.	Исслед трансп потока+оценка											
103.1	Анализ сущ дан по трансп потоку			X X	1 нед	1 нед	2 нед	2 нед				
103.2	Трансп поток+измерен осев нагр				X	0.5 нед	0.5 нед	1 нед	1 нед	опред осев нагрузки	опред осев нагрузки	
103.3	Прогноз транспорти движения				X	1.5 нед	0.5 нед					
104.	ДПВ измерения+оценка									ДПВ	ДПВ	
104.1	Выбор типичных уч-ков дорог				X	0.5 нед	0.5 нед	0.5 нед	0.5 нед	Компьютер	Компьютер	
104.2	Измерение+ввод данных поДПВ				X XX	1 нед	1 нед	1 нед	1 нед	принтер с комп	принтер с комп	
104.3	Анализ покрытий				X	0.5 нед	0.5 нед	0.5 нед	1 нед			
105.	Стратегия содержания											
105.1	Состав сущ меропр по содержан			X	0.5 нед	0.5 нед	0.5 нед	1 нед				
Всего					10.5	9.5	9.0	10.0				

ОТЧЕТ ПО ИСПОЛЬЗОВАННЫМ РЕСУРСАМ

Проект: Внедрение системы управления дорожным покрытием	Проект номер : TELREG 9305	Страны: Южные республики СНГ и Грузия	Форма 2.3 Стр.: 1		
Плановый период : 07/1996 - 09/1996	Составлен : 10/1996	Консультант Европейского союза : KOCKS CONSULT GMBH, Кобленц / Германия			
Содержание проекта: Внедрение системы управления дорожными покрытиями и мостами (PMS / BMS)					
РЕСУРСЫ / ЗАТРАТЫ	ВСЕГО ЗАПЛАНИРОВАНО	НА ПЕРИОД ЗАПЛАНИРОВАНО	ЗА ПЕРИОД ВЫПОЛНЕНО	ВСЕГО ВЫПОЛНЕНО	ОСТАТОК
ПЕРСОНАЛ					
Управляющий проектом	20 чел.-дней	5 чел.-дней	5 чел.-дней	15 чел.-дней	5 чел.-дней
Руководитель группы (Центральная Азия и Кавказ)	10.18 чел.-мес.	4.00 чел.-мес.	4.00 чел.-мес. (вкл. дополнит. группу)	10.00 чел.-мес.	0.18 чел.-мес.
Экономист по транспорту	8.00 чел.-мес.	3.00 чел.-мес.	3.00 чел.-мес.	6.50 чел.-мес.	1.50 чел.-мес.
Инженер транспортник	15 чел.-дней	10 чел.-дней	10 чел.-дней	10 чел.-дней	5 чел.-дней
ДПВ и (PMS/BMS) специалист	9.82 чел.-мес. (7.27 мес. + 56 дней)	4.00 чел.-мес.	4.00 чел.-мес.	8.00 чел.-мес.	1.82 чел.-мес.
Инженер координатор	10.18 чел.-мес.	3.50 чел.-мес.	3.80 чел.-мес.	7.30 чел.-мес.	2.88 чел.-мес.
Инженер по конструкциям и специалист по мостам	12.00 man-months (10.18 мес. + 40 дней)	4.00 чел.-мес.	3.5 чел.-мес.	3.50 чел.-мес.	8.50 чел.-мес. (10.18 мон. + 40 дней)
Специалист по асфальту	24 чел.-дней	12 чел.-дней	24 чел.-дней	40 чел.-дней	0 чел.-дней
PMS/BMS Поддержка специалистов главн. бюро	24 чел.-дней	8 чел.-дней	8 чел.-дней	20 чел.-дней	4 чел.-дней
PMS/BMS Программист	88 чел.-дней	33 чел.-дней	88 чел.-дней	33 чел.-дней	0
Итого	50.18 чел.-мес. и 156 чел.-дней	18,50 чел.-мес. и 68 чел.-дней	18.30 чел.-мес. и 80 чел.-дней	35.30 чел.-мес. и 173 чел.-дней	14.88 чел.-мес. и 14 чел.-дней
ОБОРУДОВАНИЕ И МАТЕРИАЛЫ					
Феникс ДПВ	1	1	1	1	0
Система определения осевой нагрузки	1	1	1	1	0
Толчкомер	1	1	2	2	0
Определитель дистанции	1	1	2	2	0
Персон. компьютер включая комплект. части	8	3	3	6	2
Лазерный принтер включая комплект. части	8	3	3	6	2
Прогр. обеспечение „Windows 95“	8	3	3	6	2
Прогр. обеспечение „RoSy - PMS/BMS“	8	3	3	3	5
Итого	36	16	18	27	11
ДРУГИЕ ЗАТРАТЫ					
MERLIN	--	--	1	1	0
Оборудование для тестирования мостов	--	--	1 компл.	1 компл.	0
Итого	--	--	1	1	0
ВСЕГО					

ОТЧЕТ ПО СОСТОЯНИЮ ВЫПОЛНЕНИЯ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305	Страны: Южные республики СНГ и Грузия	Форма 2.4, Стр.: 1			
Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия					
Проведенные работы	Отклонение в плане + или - %	Причины отклонения	Примечания для ограничений и предположений				
Регион: Центральная Азия							
Страна 1, Узбекистан							
Обследование состояния покрытий	- 30%	Дороги в южной части страны будут обследованы 10/1996					
Оценка транспортного потока	Выполнено						
Экономич. оценка и транспорт. расходы	В соответствии с проектом						
Обследование состояния мостов	Выполнено						
Установка и наладка PMS + BMS	Выполнено						
Рекомендации по улучшению	В соответствии с проектом						
Обучение и семинары	В соответствии с проектом						
Доставка компьютеров и программного обеспечения по PMS + BMS	Выполнено						
Страна 2, Киргизстан							
Обследование состояния покрытия	Выполнено						
Оценка транспортного потока	Выполнено						
Экономич. оценка и транспорт. расходы	В соответствии с проектом						
Обследование состояния мостов	Выполнено						
Установка и наладка PMS + BMS	Выполнено						
Рекомендации по улучшению	В соответствии с проектом						
Обучение и семинары	Выполнено						
Доставка компьютеров и программного обеспечения по PMS + BMS	Выполнено						

ОТЧЕТ ПО СОСТОЯНИЮ ВЫПОЛНЕНИЯ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305	Страны: Южные республики СНГ и Грузия	Форма 2.4, Стр.: 2
Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия		
Проведенные работы	Отклонение в плане + или - %	Причины отклонения	Примечания для ограничений и предположений	
Регион: Центральная Азия				
Страна 3, КАЗАХСТАН				
Обследование состояния покрытий	Выполнено			
Оценка транспортного потока	В соответствии с проектом			
Экономич. оценка и транспорт. расходы	В соответствии с проектом			
Обследование состояния мостов	Выполнено			
Установка и наладка PMS + BMS	Выполнено			
Рекомендации по улучшению	В соответствии с проектом			
Обучение и семинары	Выполнено			
Доставка компьютеров и программного обеспечения по PMS + BMS	Выполнено			
Страна 4, Туркменистан				
Обследование состояния покрытия	В соответствии с проектом			
Оценка транспортного потока	В соответствии с проектом			
Экономич. оценка и транспорт. расходы	В соответствии с проектом			
Обследование состояния мостов	В соответствии с проектом			
Установка и наладка PMS + BMS	В соответствии с проектом			
Рекомендации по улучшению	В соответствии с проектом			
Обучение и семинары	В соответствии с проектом			
Доставка компьютеров и программного обеспечения по PMS + BMS	В соответствии с проектом			

ОТЧЕТ ПО СОСТОЯНИЮ ВЫПОЛНЕНИЯ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.	Проект номер: TELREG 9305	Страны: Южные республики СНГ и Грузия	Форма 2.4, Стр.: 3
Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия	
Проведенные работы	Отклонение в плане + или - %	Причины отклонения	Примечания для ограничений и предположений
Регион: Центральная Азия Страна 5, Таджикистан Обследование состояния покрытий Оценка транспортного потока Экономич. оценка и транспорт. расходы Обследование состояния мостов Установка и наладка PMS + BMS Рекомендации по улучшению Обучение и семинары Доставка компьютеров и программного обеспечения по PMS + BMS Регион Кавказ Страна 1, Азербайджан Обследование состояния покрытия Оценка транспортного потока Экономич. оценка и транспорт. расходы Обследование состояния мостов Установка и наладка PMS + BMS Рекомендации по улучшению Обучение и семинары Доставка компьютеров и программного обеспечения по PMS + BMS	В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом Выполнено Выполнено В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом		

ОТЧЕТ ПО СОСТОЯНИЮ ВЫПОЛНЕНИЯ

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305	Страны: Южные республики СНГ и Грузия	Форма 2.4, Стр.: 4
Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия		
Проведенные работы	Отклонение в плане + или - %	Причины отклонения	Примечания для ограничений и предположений	
Регион: Кавказ Страна 2, Грузия Обследование состояния покрытий Оценка транспортного потока Экономич. оценка и транспорт. расходы Обследование состояния мостов Установка и наладка PMS + BMS Рекомендации по улучшению Обучение и семинары Доставка компьютеров и программного обеспечения по PMS + BMS Страна 3, Армения Обследование состояния покрытия Оценка транспортного потока Экономич. оценка и транспорт. расходы Обследование состояния мостов Установка и наладка PMS + BMS Рекомендации по улучшению Обучение и семинары Доставка компьютеров и программного обеспечения по PMS + BMS	Выполнено Выполнено В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом В соответствии с проектом			

5. ПЛАНИРОВАНИЕ РАБОТЫ ПО ПРОЕКТУ В СЛЕДУЮЩЕМ ОТЧЕТНОМ ПЕРИОДЕ

5.1 Запланированная деятельность

В течении данного отчетного периода консультативные услуги предоставлялись в 6 странах-получателях. В следующем отчетном периоде Консультант начнет работать и в Туркменистане и Таджикистане

Будут продолжены и соответственно завершены описанные ранее работы по проведению полевых испытаний и сбору данных по дорогам и автомагистралям, главными статьями которых будут:

- семинары по ознакомлению с работой оборудования
- сбор и оценка данных о дорожной поверхности и состоянии дорожной одежды
- сбор и оценка данных о состоянии мостов

Как указывалось шесть стран получили компьютерное оборудование и три страны программные системы. В следующем отчетном периоде , все восемь стран-получателей получат компьютерное оборудование, а также программную систему RoSy-PMS/BMS.

В соответствии с выше описанным, будет продолжено обучение там, где оно еще не завершено по следующим вопросам:

- использование оборудования
- сбор данных о состоянии дорог
- подготовка базы данных
- сбор данных по состоянию мостов
- использование программ PMS/BMS

Будет продолжаться работа Консультанта над транспортно-экономическими затратами и расходами на эксплуатацию дорог в отношении:

- сбор данных (интенсивность движения, осевые нагрузки)
- оценка роста движения
- расчет транспортных эксплуатационных расходов
- расходы на эксплуатацию дорог

Будут продолжены семинары по битумно-связующим материалам и связанной с ними технологии, а также по аспектам дорожной безопасности.

В ноябре 1996 года будут осуществлена ознакомительная поездка в Западную Европу

5.2 Таблицы

В таблицах ниже отражена работа, которую предполагается провести в следующем отчетном периоде в каждом из восьми государств-получателей помощи.

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр.: 1		
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия				
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)								
No	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ			
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ	ДРУГОЕ
	Регион Центральная Азия	10	11	12	Консультант ЕС	Страна партнер		
	Страна 1, Узбекистан							
4. 4.1	Обслед сост дорог+опред станд Определен неровн.+обслед сост	X X			1 нед	1 нед		
14. 14.2 14.5	Обучение и Семинары Дорожи безопасность и проектирование Ознакомит поездка	X	X		0.2 нед 1 нед	0.2 нед 1 нед	Учебн матер	
	Страна 2, Киргизстан							
28. 28.5	Обучение и Семинары Ознакомит поездка		X		1 нед	1 нед		
	Страна 3, Казахстан							
42. 42.5	Обучение и Семинары Ознакомит поездка		X		1 нед	1 нед		
	Всего				4.2 нед	4.2 нед		

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр: 2	
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия			
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)							
No	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ		
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ
	Регион Центральная Азия						
	Страна 4, Туркменистан	10	11	12	Консультант ЕС	Страна партнер	
44.	Стратегия сбор данных	X X			1.5 нед	2 нед	
45.	Расположение дорожной сети		X		0.5 нед	0.5 нед	
46.	Обслед сост дорог+опред станд		X X X X		4 нед	3 нед	Толякомер Мерлин Измер дистанц
47.	Обследв трансп потока+оценка	X X X			3 нед	3 нед	изм осев нагруз
48.	ДПВ измерения+оценка		X X		2 нед	2 нед	ДПВ, принтер компьютер
49.	Стратегия содержания		X		1 нед	1 нед	
50.	Дороги+эксплуатац расходы		X		1 нед	1 нед	
51.	Транспортн расходы (HDM)	X X X			3 нед	3 нед	
52.	Обслед сост мост+опред станд		X X	X	3 нед	3 нед	
53.	Стратегия содержания мостов			X X	2 нед	2 нед	
54.	Наладка PMS + BMS			X X	2 нед	2 нед	PMS/BMS програм
55.	Модель оптимизации			X X	1 нед	2 нед	
56.	Обучение+семинары	X	X X X		3 нед	3 нед	учеб матер
	Всего				27 нед	27.5 нед	

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр.: 3	
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия			
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)							
No	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ		
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ
	Регион Центральная Азия						
	Страна 5, Таджикистан	10	11	12	Консультант ЕС	Страна партнер	
58.	Стратегия сбор данных	X X			1.5 нед	2 нед	
59.	Расположение дорожной сети	X			0.5 нед	0.5 нед	
60.	Обслед сост дорог+опред станд	X X X X			4 нед	3 нед	толчком Мерлин измер дистанц
61.	Обследов трансп потока+оценка	X X X			3 нед	3 нед	измер осев нагр
62.	ДПВ измерения+оценка		X X		2 нед	2 нед	ДПВ, принтер, компьютер
63.	Стратегия содержания	X			1 нед	1 нед	
64.	Дороги+эксплуатац расходы	X	X		1 нед	1 нед	
65.	Транспортн расходы (HDM)	X X X			3 нед	3 нед	
66.	Обслед сост мостов+опред станд	X X X			3 нед	3 нед	
67.	Стратегия содержания мостов	X X			2 нед	2 нед	
68.	Наладка PMS + BMS	X X			2 нед	2 нед	PMS/BMS прогр
69.	Модель оптимизации	X			1 нед	2 нед	
70.	Обучение+семинары	X X X	X		3 нед	3 нед	учебн матер
	Всего				27 нед	28.5 нед	

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр.: 4	
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия			
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)							
No	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ		
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ
	Регион Кавказ						
	Страна 1, Азербайджан	10	11	12	Консультант ЕС	Страна партнер	
78.	Дороги+эксплуатац расходы						
78.1	Оценка стоимостей содержания	X			0.2 нед	1 нед	
80.	Обслед сост мост+опред станд						
80.1	Сбор данных по мостам	X			0.5 нед	1 нед	
80.2	Инспектирование мостов	X	X		2 нед	3 нед	оснащен для провер мостов
80.3	Состав. существ стандар по мостам		X		0.5 нед	1 нед	
81.	Стратегия содержания мостов						
81.1	Оценка сущ методов содержания		X		1 нед	1 нед	
81.2	Дискус по вопросам содержания		X		0.5 нед	0.5 нед	
81.3	Оценка стоим содерж+ ремонта		X		0.5 нед	0.5 нед	
82.	Наладка PMS + BMS						PMS/BMS прогр
82.1	Установка системы	X			0.5 нед	0.5 нед	
82.2	Ввод данных в PMS/BMS	X	X		1.5 нед	1.5 нед	
83.	Модель оптимизации	X			1 нед	2 нед	
84.	Обучение+Семинары						учебн матер
84.1	Семинар по технол бит.вяж продук	X			1 нед	1 нед	
84.2	Семинар по дорожн безопасн и проектиров	X			0.2 нед	0.2 нед	
84.3	Обучение+семинар PMS/BMS	X	X		1 нед	1 нед	
84.4	Семинар по технол. содерж мостов		X		0.5 нед	0.5 нед	
84.5	Ознакомит поездка		X		1 нед	1 нед	
	Всего				11.9 нед	15.7 нед	

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями.		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр.: 5		
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия				
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)								
№	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ			
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ	ДРУГОЕ
	Регион Кавказ	10	11	12	Консультант ЕС	Страна партнер		
	Страна 2, Грузия							
94.	Обслед сост мост+опред станд	X X X			3 нед	3 нед	PMS/BMS прогр	
95.	Стратегия содержания мостов	X X			2 нед	2 нед		
96.	Наладка PMS + BMS							
96.1	Установка системы	X			0.5 нед	0.5 нед		
96.2	Ввод данных в PMS/BMS	X X	X		1.5 нед	1.5 нед		
97.	Модель оптимизации	X X			1 нед	2 нед	учебн матер	
98.	Обучение+Семинары							
98.1	Семинар технол бит.вяж продукт	X			1 нед	1 нед		
98.2	Семинар по дорожн безопасн и проектиров		X		0.2 нед	0.2 нед		
98.3	Обучение+семинар PMS/BMS	X	X		1 нед	1 нед		
98.4	Семинар по технол. содерж мост			X	0.5 нед	0.5 нед		
98.5	Ознакомительн поездка		X		1 нед	1 нед		
	Всего				11.7 нед	12.7 нед		

ПЛАН МЕРОПРИЯТИЙ НА ПОСЛЕДУЮЩИЙ ПЕРИОД (Рабочая программа)

Название проекта: ТРАСЕКА Проект - Внедрение системы управления дорожными покрытиями		Проект номер: TELREG 9305		Страны: Южные республики СНГ и Грузия		Форма 1.6, Стр.: 6	
Плановый период: 10/1996 - 12/1996		Составлен: 10/1996		Консультант Европейского союза: KOCKS CONSULT GMBH, Кобленц / Германия			
Содержание проекта: Внедрение системы управления дорожными покрытиями (PMS / BMS)							
№	МЕРОПРИЯТИЯ	ВРЕМЕННЫЕ ОГРАНИЧЕНИЯ			ЗАТРАТЫ		
		1996 Месяцы			ПЕРСОНАЛ		ОБОРУДОВАНИЕ И МАТЕРИАЛЫ
	Регион Кавказ						
	Страна 3, Армения	10	11	12	Консультант ЕС	Страна партнер	
102.	Обслед сост дорог+опред станд						
102.1	Определ неровн.+ обслед состоян	X			1 нед	1 нед	
105.	Стратегия содержания						
105.2	Предлож. по стратегии содержан	X			0.5 нед	0.5 нед	
106.	Дороги+эксплуатац расходы						
106.1	Оценка стоимостей содержания	X			0.2 нед	1 нед	
107.	Транспорт расходы (HDM)						
107.1	Классификац автомоб для HDM	X			0.5 нед	1 нед	
107.2	Эконом+финансов стоим по транс	X X			1.5 нед	2 нед	
107.3	Калькул транспорт расходов	X			1 нед		
108.	Обслед сост мост+опред станд		X X X		3 нед	3 нед	
109.	Стратегия содержания мостов		X X		2 нед	2 нед	
110.	Наладка PMS + BMS						PMS/BMS прогр
110.1	Установка системы	X			0.5 нед	0.5 нед	
110.2	Ввод данных в PMS/BMS	X	X		1.5 нед	1.5 нед	
111.	Модель оптимизации	X	X		1 нед	2 нед	
112.	Обучение+Семинары						учебн матер
112.1	Семинар технол бит.вяж продукт	X			1 нед	1 нед	
112.2	Семинар по безоп дорожн движен	X			0.2 нед	0.2 нед	
112.3	Обучение+семинар PMS/BMS	X	X		1.5 нед	1.5 нед	
112.4	Семинар по технол. содерж мост		X		0.5 нед	0.5 нед	
112.5	Ознакомит поездка		X		1 нед	1 нед	
	Всего				16.9 нед	18.7 нед	

ПРИЛОЖЕНИЕ 1

- Биография
Циммерманн
- Биография Поич

14. Профессиональный опыт:

Дата	1995 - 1996
Место	Узбекистан
Компания	KOCKS CONSULT GMBH
Должность	Старший инженер по материалам и контролю за качеством
Описание	Ташкентский Аэропорт проект реконструкции несет ответственность за надзор и испытания при работах по усилению асфальтобетонного и бетонного покрытия площ. 440,000 кв м на 2 ВПП
Дата	1991 - 1995
Место	Германия
Компания	Harres Pickel GmbH
Должность	Главный инженер по геотехнике
Описание	Ответственность за исследование почв и материалов, лабораторные испытания, расчет покрытий и фундаментов мостов для проектов в области инфраструктуры - дороги, автомагистрали, ж/дороги.
Дата	1990 - 1991
Место	Заир
Компания	Strabag International
Должность	Старший инженер по геотехнике
Описание	При строительстве 120 км дороги Осо-Осокари отвечает за исследования и лабораторные испытания почв и строительных материалов, расчет покрытия(а/бетона), расчеты фундаментов 8 мостов и н надзор за работами в карьере
Дата	1989 - 1990
Место	Германия
Компания	IGB Consulting Engineers
Должность	Старший инженер по геотехнике
Описание	Проектирование засыпных участков, вкл. обследование мест, почв, лабораторн. испытания, подготовка спецификаций и надзор за работами.

Дата	1988 - 1989
Место	Германия
Компания	Институт защиты окружающей
Должность	Старший инженер по геотехнике
Описание	Курсы обучения мерам по защите окружающей среды, связанными со структурными и геотехническими расчетами, а также со строительством и надзором (меры защиты наземных и поверхн. вод, разработка/претворение мер добычи, не наносящих вреда окружающей среде, защита от эрозии, переработка материалов)
Дата	1984 - 1987
Место	Саудовская Аравия
Компания	GTZ GmbH
Должность	Главный инженер по геотехнике и лабораторным испытаниям
Описание	Ответственность за передачу технологии, обучение местного штата лаборантов проведению полевых обследований, лабор. испытаний, расчету фундам и контр за качест
Дата	1981 - 1983
Место	Саудовская Аравия
Компания	Kling Consult
Должность	Инженер по геотехнике и конструкциям
Дата	1980 - 1981
Место	Германия
Компания	Baugrund GmbH Dr. Schwarz
Должность	Инженер по гражданскому строительству
Описание	Ответственность за геотехнические полевые исследования и лабор. испытания проектов дорог, а также за конструктор проектирование.
Дата	1972 - 1973
Место	Германия
Компания	Heuer and Luffler Consulting Engineers
Должность	Инженер по гражданскому строительству
Описание	Расчеты конструкций и анализ нагрузок

БИОГРАФИЯ

Предлагаемая должность: Инженер по проектированию и эксплуатации мостов

- | | | |
|----|--------------------|-----------------|
| 1. | Фамилия | ПОИЧ |
| 2. | Имя | Петер |
| 3. | Дата рождения | 24 декабря 1962 |
| 4. | Национальность | немец |
| 5. | Гражданский статус | женат |
| 6. | Образование | |

Институт	Высшая инженерная школа Германия
Дата	1985 - 1989
Звание или полученный диплом	Диплом инженера гражданского строительства

7. Языки и степень владения ими (отметка от 1 до 5 по компетентности)

Язык	Чтение	Разговор	Письмо
Немецкий	5	5	5
Английский	4	4	4
Русский	3	3	2

8. Участие в профессиональных обществах

9. Другие знания (Компьютерн грамотность и др.)

- CADdy - CAD System
- Система управления мостами (BMS)
- R-STAB - Статическая прогр
- PCAE - RC Статическая прогр
- Windows, Winword, Corel

10. Должность Инженер по проектированию и эксплуатации мостов

11. Время работы в фирме: 6

12. Общая квалификация

Инженер проектировщик с опытом работы в проектировании, восстановлении и эксплуатации мостов? Опыт в проведении надзора, обследований и проверок состояния мостов, также как и исследований для восстановления различных систем мостов: их эксплуатации и содержания при помощи компьютерных программ управления мостами (BMS).

13. Опыт работы в восточных странах

Страна	Дата

14. Профессиональный опыт:

Дата	1990 - 1996
Место	Германия
Компания	Verkehrs- und Ingenieurbau Consult GmbH
Должность	Инженер по проектированию мостов
Описание	<ul style="list-style-type: none"> - Проектирование восстановления ж/б моста на В 273 с высотой опоры 48 м - Проектирование восстановления и расширения однопролетного моста с прокатной балкой из бетона на магистрале А 4 - Обследование исторического трехпролетного сводчатого моста (Год постр. 1852, Общая дл. 40 m) около Потсдама, с тем, чтобы избежать строительства нового моста принимая во внимание аспекты ухода за памятниками

	<ul style="list-style-type: none"> - Проектирование восстановления двухпролет ного ж/б моста на В 5 - Проектирование восстановления и усиления сводчатых мостов - Проектирование нового моста в Бранденбурге, трехпролетный мост с предварительно напряженными конструкиями Общ дл 93 м - Проектирование и модернизация четырехпролетного ж/бетонного моста с общей дл 37 м через железнодорожное полотно. - Проектирование 6 полосного расширения на А10 - Проверка и программа содержания для 10 стальных, ж/бетонных и сводчатых мостов с дл от 30 до 70 м с помощью BMS . - Подготовка основных проверок мостов в рамках приема строительных сооружений 16 вновь строящ. мостов(ж/бетон, предварит. напр. ж/бетон с дл до 221 м и тунелем дл 430 м).
Дата	1989 - 1990
Место	Германия
Компания	VEB Autobahnkombinat
Должность	Entwurfsingenieur
Описание	Сверка и документирование понтроля за мостами по Ri-EBW-Prüf с помощью компьютерного обеспечения (BMS).

ПРИЛОЖЕНИЕ 2

- Данные состояния
дороги
- Данные по
покрытию

ДАННЫЕ ПО СОСТОЯНИЮ ПОКРЫТИЯ
Неровности дороги/Состояние поверхности (K A Z A K H S T A N)

Фактор калибрации ; C = 3.44

М 39: Гран. Киргизстана (Север. Бишкека) - Алматы

Место km - Post etc.	Измерен Длина (м)	Толчкомер (импуль.)	Неровност ВІ (мм/км)	Дорожный пикетаж (км)	IRI (м/км)	Кате- гория (визуал)	Уч-к Длина (км)
1412	53,740			1412.41		3	0.34
	54,500			1413.17		3	0.76
	56,050			1414.72		2 А	1.55
	60,400			1419.07		1 А	4.35
	60,830			1419.50		2 А	0.43
	66,500			1425.17		2 А	5.67
	67,000			1425.67		2 А	0.50
	69,240			1427.91		3	2.24
	69,500			1428.17		2 А	0.26
НАЧАЛО ДПВ "ПИЛОТ" УЧ-КА 2							
1428	0			1428.00		3	0.24
1429	1,000			1429.00		4	1.00
1430	2,000	223	6935	1430.00	8.4	3	1.00
	2,500			1430.50		4	0.50
1431	2,968			1430.97		4	0.47
	3,000	294	9143	1431.00	10.7	4	0.03
1432	3,959			1431.96		4	0.96
	4,000	331	10294	1432.00	11.9	4	0.04
1433	4,931			1432.93		4	0.93
	5,000	349	10854	1433.00	12.5	4	0.07
1434	5,911			1433.91		4	0.91
	6,000	313	9734	1434.00	11.3	4	0.09
КОНЕЦ ДПВ "ПИЛОТ" УЧ-КА 2							
	76,500			1434.45		3	0.45
	77,500			1435.45		4	1.00
	77,900			1435.85		4	0.40
	78,770			1436.72		3	0.87
	79,000			1436.95		2 А	0.23
	80,550			1438.50		2 А	1.55
1439	81,180			1439.00		3	0.50
1441	180			1441.00		2 В	2.00
1442	1,107			1442.00		1 В	1.00
	1,180	125	4294	1442.07	5.5	1 В	0.07
	2,180	125	4294	1443.07	5.5	1 В	1.00
1443	2,192			1443.09		1 В	0.01
	3,180	121	4156	1444.07	5.3	1 В	0.99
1444	3,203			1444.10		1 В	0.02
	4,180	130	4466	1445.07	5.7	1 В	0.98
1445	4,223			1445.12		1 В	0.04
	5,180	125	4294	1446.07	5.5	1 В	0.96
1446	5,249			1446.14		2 В	0.07
	6,180	156	5359	1447.07	6.7	2 В	0.93
1447	6,275			1447.17		5	0.10
	7,180	310	10649	1448.07	12.3	5	0.90
1448	7,282			1448.18		5	0.10
	8,180	390	13397	1449.07	15.1	5	0.90

ДАННЫЕ ПО СОСТОЯНИЮ ПОКРЫТИЯ

Место km - Post etc.	Измерен Длина (м)	Толчкомер (импуль.)	Неровност ВІ (мм/км)	Дорожный пикетаж (км)	IRI (м/км)	Кате- гория (визуал)	Уч-к Длина (км)
1449	8,305			1449.20		5	0.13
	9,180	548	18824	1450.07	20.4	5	0.88
1450	9,308			1450.20		2 В	0.13
	10,180	186	6389	1451.07	7.8	2 В	0.87
1451	10,250			1451.14		1 В	0.07
	11,180	122	4191	1452.07	5.4	1 В	0.93
1452	11,310			1452.20		1 В	0.13
	12,180	100	3435	1453.07	4.5	1 В	0.87
1453	12,330			1453.22		1 В	0.15
	13,180	134	4603	1454.07	5.8	1 В	0.85
	14,180	92	3160	1455.07	4.2	1 В	1.00
1455	14,360			1455.25		3	0.18
	15,000			1455.89		3	0.64
1456	15,440			1456.33		3	0.44
	16,180	264	7685	1457.07	9.2	3	0.74
	17,180	133	4569	1458.07	5.8	1 А	1.00
1458	17,490			1458.38		2 А	0.31
	18,180	182	6252	1459.07	7.6	2 А	0.69
1459	18,480			1459.37		2 А	0.30
	19,180	146	5015	1460.07	6.3	2 А	0.70
1460	19,380			1460.27		1 В	0.20
	20,180	126	4328	1461.07	5.5	1 В	0.80
	21,180	135	4637	1462.07	5.9	1 В	1.00
1462	21,570			1462.46		2 В	0.39
	22,180	167	5736	1463.07	7.1	2 В	0.61
1463	22,620			1463.51		2 В	0.44
	23,180	167	5736	1464.07	7.1	2 В	0.56
1464	23,630			1464.52		3	0.45
	24,180	252	8656	1465.07	10.2	3	0.55
1465	24,640			1465.53		2 В	0.46
	25,180	166	5702	1466.07	7.0	2 В	0.54
1466	25,660			1466.55		2 В	0.48
	26,180	181	6217	1467.07	7.6	2 В	0.52
1467	26,670			1467.56		3	0.49
	27,180	227	7797	1468.07	9.3	3	0.51
1468	27,670			1468.56		2 В	0.49
	28,180	185	6355	1469.07	7.8	2 В	0.51
1469	28,690			1469.58		2 В	0.51
	29,180	170	5840	1470.07	7.2	2 В	0.49
1470	29,750			1470.64		2 В	0.57
	30,180	168	5771	1471.07	7.1	2 В	0.43
	31,180	189	6492	1472.07	7.9	2 А	1.00
1472	31,780			1472.67		2 А	0.60
	32,180	196	6733	1473.07	8.2	2 А	0.40
1473	32,730			1473.62		2 В	0.55
	33,180	162	5565	1474.07	6.9	2 В	0.45
	34,180			1475.07		2 В	1.00
Town sign	34,440			1475.33		2 В	0.26
ALMATY							
1475	34,770			1475.66		2 В	0.33

ДАННЫЕ ПО СОСТОЯНИЮ ПОКРЫТИЯ
ТРАСЕКА - PMS
**УЧАСТОК "ПИЛОТ" ДЛЯ СИСТЕМЫ
 УПРАВЛЕНИЯ ДОРОЖНЫМ ПОКРЫТИЕМ
 ГРУЗИЯ**
Участок 1
S 1 (M 1), Тбилиси-Кашури / Потги
Длина уч-ка 11.5 км, Пикетаж км 28.2 - 39.7
ГЕО - 1.1 Толщина слоя покрытия

ПК км 29.2	ПК км 33.7	ПК км 38.4
40 мм Асфальт 1 слой	30 мм Асфальт 1 слой	30 mm мм Асфальт 1слой
110 мм Асфальт 2 слой	120 мм Асфальт 2 слой	50 mm Asphalt 2 слой
250 мм Гравий	100 мм Гравий	120 мм Гравий
Грунт песок - глина	100 мм Асфальт	70 мм Асфальт
	50 мм Гравий	80 мм Гравий
	20 мм Асфальт	Грунт песок - глина
	130 мм Гравий	
	Грунт песок - глина	

ГЕО - 1.2 Неровность

Пикет [км]	IRI [м/км]
28.20 - 28.65	11.9
28.65 - 29.42	9.2
29.42 - 29.96	11.1
29.96 - 31.16	13.2
31.16 - 32.04	9.0
32.04 - 33.45	10.7
33.45 - 34.50	10.8
34.50 - 35.13	10.6
35.13 - 36.00	11.5
36.00 - 37.28	12.0
37.28 - 38.06	12.2
38.06 - 39.11	11.1
39.11 - 39.70	11.7

ДАННЫЕ ПО СОСТОЯНИЮ ПОКРЫТИЯ
Участок 2

S 4 (M 4), Тбилиси - гр. Азербайджана

Длина уч-ка 12 км , пикет км15 (км Пост 3 стар. номер.) км27

GEO - 2.1 Толщина слоя покрытия

ПК км 23.3	ПК км 25.9	ПК км 29.8
50 мм Асфальт 1 слой 70 мм Асфальт 2 слой 430 мм Гравий Грунт песок - глина	50 мм Асфальт 1 слой 30 мм Асфальт 2 слой 100 мм Асфальт (стар сл) 100 мм Гравий Грунт песок - глина	120 мм Асфальт 400 мм Гравий 130 мм Асфальт 50 мм Гравий Грунт песок - глина

GEO - 2.2 Неровность

Пикет [км]	IRI [м/км]
15.00 - 15.50	6.1
15.50 - 16.50	8.1
16.50 - 17.50	8.0
17.50 - 18.60	10.5
18.60 - 19.60	9.7
19.60 - 21.00	9.2
21.00 - 22.30	8.5
22.30 - 22.54	19.2
22.54 - 22.85	14.1
22.85 - 23.02	15.3
23.02 - 23.70	15.9
23.70 - 24.15	21.4
24.15 - 25.20	14.1
25.20 - 26.34	13.1
26.34 - 27.00	14.6

ДАННЫЕ ПО СОСТОЯНИЮ ПОКРЫТИЯ
Участок 2

S 4 (M 4), Тбилиси - гр. Азербайджана

Длина уч-ка 12 км , пикет км15 (км Пост 3 стар. номер.) км27

GEO - 2.1 Толщина слоя покрытия

ПК км 23.3	ПК км 25.9	ПК км 29.8
50 мм Асфальт 1 слой 70 мм Асфальт 2 слой 430 мм Гравий Грунт песок - глина	50 мм Асфальт 1 слой 30 мм Асфальт 2 слой 100 мм Асфальт (стар сл) 100 мм Гравий Грунт песок - глина	120 мм Асфальт 400 мм Гравий 130 мм Асфальт 50 мм Гравий Грунт песок - глина

GEO - 2.2 Неровность

Пикет [км]	IRI [м/км]
15.00 - 15.50	6.1
15.50 - 16.50	8.1
16.50 - 17.50	8.0
17.50 - 18.60	10.5
18.60 - 19.60	9.7
19.60 - 21.00	9.2
21.00 - 22.30	8.5
22.30 - 22.54	19.2
22.54 - 22.85	14.1
22.85 - 23.02	15.3
23.02 - 23.70	15.9
23.70 - 24.15	21.4
24.15 - 25.20	14.1
25.20 - 26.34	13.1
26.34 - 27.00	14.6

Т Р А С Е К А : Инспекция моста - Регистрация повреждений

(TRACECA : Bridge inspection - Registration of damages)

Номер моста:.....

Вид:.....

Дата инспекции:.....

Страница:.....

№ No	Структурный компонент Structural component	Материал Material	Описание повреждения Kind of damage	Объем Amount	Нахождение повреждения Location	Фото №	Замечания Remarks

TRACESA - Введение в основы менеджмента мостов (BMS)

Оценка Состояния Мостов

Основные параметры оценки состояния мостов и их распределение по классам (Оценка качества каждого класса)

Описание состояния	Оценка качества	Неотложные мероприятия
<p>Конструкция не имеет или имеет минимальные, трудно заметные повреждения.</p> <p>Повреждения ни в отдельности не в целом не влияют на стабильность конструкции, безопасность движения, долговечность конструкции.</p> <p>Примеры типичных дефектов:</p> <ul style="list-style-type: none"> • загрязненная поверхность мешает визуальной инспекции • небольшие неровности/неглубокая колея на проезжей части, тротуарах • загрязнение деформационных швов, опорных частей и пространства вокруг них, швов стальных конструкций и технических смотровых ходов конструкций • не выравнен растительный слой на или в непосредственной близости от конструкций • незначительные осадки грунта у опор /или подмыв опор • грязные, нечитаемые дорожные знаки 	1	Текущее содержание
<p>Конструкция имеет ясно видимые повреждения, но они существенно не влияют на надежность. Нет существенных помех безопасности движения.</p> <p>Существующее состояние конструкции не обеспечивает требования долговечности.</p> <p>Примеры типичных дефектов:</p> <ul style="list-style-type: none"> • Небольшие повреждения антикоррозийной защиты и/или инженерного обустройства моста (перил, барьера безопасности, дорожных фонарей, ограждающих знаков, и.т.д.) • инженерное обустройство моста в хорошем состоянии, но уже не соответствует требованиям стандартов • незначительные повреждения откосов и стабильности насыпи, лестничных маршей на конусах, водоотвода с моста, деформационных швов, заполнения швов • небольшие повреждения антикоррозийной защиты стальных пролетных строений • средняя неровность/колея покрытия проезжей части, тротуаров 	2	Текущее и периодическое содержание и/или ремонт

Описание состояния	Оценка качества	Неотложные мероприятия
<p>Конструкция имеет значительные повреждения, которые в отдельности или в целом в короткие сроки могут уменьшать стабильности и/или вызвать необходимость ограничения использования моста в целях безопасности движения (ограничения нагрузки, однопосное движение, организованная знаками или барьерами и.т.д.)</p> <p>Существующие повреждения сокращает срок службы сооружения.</p> <p>Примеры типичных дефектов:</p> <ul style="list-style-type: none"> • значительные повреждения перил и плит тротуаров • значительные повреждения на проезжей части и пешеходных проходов • значительные неровности покрытия проезжей части • значительные повреждения антикоррозийной защиты и покрытий стальных конструктивных элементов • эрозия и коррозия пролетных строений и опор, начинающая уменьшение поперечных сечений несущих элементов • повреждения гидроизоляции, заполнения швов, водоотвода от моста и гидроизоляции, потеря стабильности насыпи (подмыв конусов), отсутствие подвижности опорных частей и.т.д., которые могут вызвать другие значительные повреждения • коррозия арматуры и несущих стальных элементов с уменьшением их поперечных сечений 	3	Капитальный ремонт и/или реабилитация
<p>Конструкция имеет серьезные повреждения, которые в отдельности или в целом уменьшает стабильность и/или ограничивает безопасность движения.</p> <p>Долговечность конструкции значительно уменьшилась.</p> <p>Необходимо срочно принять меры по эксплуатации моста (ограничение нагрузки, однопосное движение, организованное знаками, частичное закрытие моста барьерами и.т.д.) и/или незамедлительное устранение опасностей для безопасности движения.</p> <p>Примеры типичных дефектов:</p> <ul style="list-style-type: none"> • недостаток пучков напряженной арматуры • существенные повреждения на основных несущих элементах в результате перегрузки (деформации, трещины в швах объединения элементов, существенные трещины на уровне пучков, деформированные связи) • перила, обустройство безопасности, покрытие проезжей части и другие элементы инженерного обустройства моста имеют повреждения, которые значительно снижают их функции • повреждения структурных элементов, влекущие за собой опасность движения (уменьшение подмостового габарита, опасность обвала некоторых частей моста) 	4	Реабилитация или реконструкция

ПРИЛОЖЕНИЕ 3

- Обследование
нагрузок на ось

СУММА ВЫБОРОЧНЫХ ОБСЛЕДОВАНИЙ НАГРУЗОК НА ОСЬ В СТРАНАХ ТРАСЕКА

тип транспорта	Гос принадлеж транспор	страна исслед	Sample size	Средний вес (тонны)					GVW	ESA / vehicle
				Axle 1	Axle 2	Axle 3	Axle 4	Axle 5		
Large Bus	C.I.S	Uzbekistan	8	4.27	8.21				12.48	1.0997
Large Bus	C.I.S	Kyrgyzstan	9	3.04	5.05				8.09	0.1660
Large Bus	C.I.S	Kazakhstan	8	3.43	5.57				9.00	0.2481
Large Bus	C.I.S	Azerbaijan	8	4.97	8.35				13.32	1.2341
Large Bus	C.I.S	Georgia	5	4.73	9.54				14.27	1.9811
Large Bus	Other	Georgia	4	5.46	9.23	4.50			19.19	1.9299
Large Bus	All	Georgia	9	5.05	9.40	4.50			18.95	2.0001
Truck 2-axle	C.I.S	Uzbekistan	170	3.00	4.97				7.97	0.1559
Truck 2-axle	Other	Uzbekistan	6	6.14	12.08				18.22	5.1235
Truck 2-axle	All	Uzbekistan	176	3.13	5.25				8.39	0.1930
Truck 2-axle	All	Kyrgyzstan	118	2.28	4.08				6.38	0.0686
Truck 2-axle	All	Kazakhstan	109	2.35	3.61				5.96	0.0453
Truck 2-axle	All	Azerbaijan	121	2.91	4.71				7.62	0.1272
Truck 2-axle	C.I.S	Georgia	105	2.73	4.34				7.07	0.0925
Truck 2-axle	Other	Georgia	3	3.45	6.62				10.07	0.4651
Truck 2-axle	All	Georgia	108	2.75	4.40				7.15	0.0974
Truck 3-axle	C.I.S	Uzbekistan	195	3.74	4.24	4.23			12.19	0.1892
Truck 3-axle	Other	Uzbekistan	2	4.07	2.67	2.66			9.40	0.0846
Truck 3-axle	All	Uzbekistan	197	3.74	4.23	4.22			12.17	0.1879
Truck 3-axle	All	Kyrgyzstan	72	3.76	4.12	3.98			11.87	0.1667
Truck 3-axle	All	Kazakhstan	128	3.68	4.28	4.11			12.07	0.1814
Truck 3-axle	All	Azerbaijan	258	3.62	4.24	4.16			11.99	0.1792
Truck 3-axle	C.I.S	Georgia	116	3.79	4.81	4.84			13.44	0.2910
Truck 3-axle	Other	Georgia	29	4.71	9.56	7.78			22.05	2.8213
Truck 3-axle	All	Georgia	145	3.97	5.76	5.43			15.16	0.5004
Truck 4-axle	C.I.S	Uzbekistan	27	4.27	5.78	3.27	3.69		16.88	0.3943
Truck 4-axle	Other	Uzbekistan	27	5.24	8.51	8.42	7.85		30.02	3.3343
Truck 4-axle	All	Uzbekistan	54	4.75	7.15	5.84	5.81		23.45	1.2237
Truck 4-axle	All	Kyrgyzstan	9	5.41	7.16	5.03	5.23		22.83	1.0991
Truck 4-axle	All	Kazakhstan	8	3.60	4.89	2.98	3.82		15.29	0.2327
Truck 4-axle	All	Azerbaijan	42	4.12	5.31	4.09	4.25		17.77	0.3810
Truck 4-axle	C.I.S	Georgia	11	5.32	7.87	5.33	6.19		24.71	1.5591
Truck 4-axle	Other	Georgia	13	5.54	8.28	7.22	6.90		27.94	2.3967
Truck 4-axle	All	Georgia	24	5.44	8.09	6.36	6.57		26.46	1.9529
Truck 5-axle	C.I.S	Uzbekistan	44	4.09	3.62	3.40	3.34	3.42	17.87	0.1909
Truck 5-axle	Other	Uzbekistan	68	5.13	6.21	5.97	7.19	7.40	31.89	2.0573
Truck 5-axle	All	Uzbekistan	112	4.72	5.19	4.96	5.68	5.84	26.38	0.9092
Truck 5-axle	All	Kyrgyzstan	17	4.23	4.14	4.45	4.30	4.38	21.26	0.3870
Truck 5-axle	All	Kazakhstan	56	4.00	3.70	3.70	3.17	3.17	17.35	0.1882
Truck 5-axle	All	Azerbaijan	92	4.01	4.23	3.97	4.01	4.05	20.28	0.3058
Truck 5-axle	C.I.S	Georgia	23	4.22	4.56	3.73	5.48	4.35	22.34	0.4969
Truck 5-axle	Other	Georgia	18	4.98	6.69	5.19	4.78	4.95	26.59	1.0073
Truck 5-axle	All	Georgia	41	4.55	5.49	4.37	5.17	4.62	24.20	0.6477

Источник: Обследование осевой нагруз было выполнено под рук-вом консультанта

Примечан: Другие(не-С.І.С) междунароа транспор ср-ва в основном из Турции и Ирана.

GVW - Общий вес автомобиля

ESA - Эквив станд оси .

CIS - Содруж независ гос-в (СНГ)

ПРИЛОЖЕНИЕ 4

- Семинары

Название проекта :	Проект Трасека - Создание систем управления состоянием дорожного покрытия
Номер проекта :	TELREG 9305
Страна :	Республики в южной части СНГ и Грузия

СЕМИНАР ПО БИТУМО-СВЯЗУЮЩИМ МАТЕРИАЛАМ
ОЦЕНКА МЕТОДОВ, ТЕХНОЛОГИЙ И СТАНДАРТОВ В СТРАНАХ ПРОЕКТА
ТРАСЕКА И СРАВНЕНИЕ С ЕВРОПЕЙСКИМИ И ДРУГИМИ ЗАПАДНЫМИ
МЕТОДАМИ, ТЕХНОЛОГИЯМИ И СТАНДАРТАМИ

1. ПРОЕКТИРОВАНИЕ ПОКРЫТИЯ

- критерии проектирования
 - главной целью проектирования должно быть:
 - создание комфортабельных условий для пользователей дорог
 - их экономическая и финансовая приемлемость
 - сведение до минимума деформац. изменений покрытия
- характеристика асфальтовых слоев, несущих слоев и земляного полотна
- направления проектирования (процедура проект.)
 - компьютерное
 - традиционное (базирующееся на опыте)
- рассмотрение существующих проектных решений в сравнении с западным опытом проектирования.
 - сравнение стандартов, применявшихся в бывшем СССР с
 - Американскими (AASHO)
 - Японскими
 - Канадскими
 - Немецкими
- рассмотрение предложений о желаемых изменениях соответствующих потребностям каждой страны

2. МАТЕРИАЛЫ

- общие требования к материалам, таким как продукты дробления горных пород и битумам используемым в асфальтобетоне
- материалы, имеющиеся в распоряжении
- критерии выбора состава асфальта и лабораторные проверки
- дискуссии по существующей ситуации и предложения по возможным улучшениям

3. КОНТРОЛЬ КАЧЕСТВА

- цель контроля качества
- кем выполняется, когда, где и почему контроль и проверка
- дискуссии существующей ситуации в сравнении с требованием качества

4. АСФАЛЬТОВАЯ ПРОДУКЦИЯ И ТЕХНИКА УСТРОЙСТВА ПОКРЫТИЯ

- асфальтовые продукты для дорожного стр-ва
- асфальтовые заводы
- методы асфальтирования и уплотнения
- дискуссии по существующей ситуации

5. ВОССТАНОВЛЕНИЕ АСФАЛЬТОВЫХ ПОКРЫТИЙ

- техника и методы в отношении к размерам повреждений на дороге

Оценка состояния дороги

- состояния поверхности
- несущей способности
- состав покрытия
- состояния структур покрытия

- повреждения поверхности, причины ухудшения дорог

- содержание, ремонт, замена и усиление покрытий дорог

- дискуссии по имеющимся в данное время методам содержания и предложения по улучшению

6. ТЕХНИКА И МЕТОДЫ ПОВТОРНОГО (РЕСАКЛИНГ) ПРИМЕНЕНИЯ ДЛЯ АСФАЛЬТОБЕТОНА

- холодная / теплая переработка, преимущества и недостатки

- традиционные методы

- повторное смешивание непосредственно на стройке

Цель этого метода

- Улучшение несущих способностей
- Улучшение морозостойкости

Преимущества этого метода

- Отсутствие отходов материалов при дор. стр-ве
- Защита природных ресурсов
- Уменьшение транспорта материалов
- Защита других госуд./обществен. дорог в округе

- профилирование, повторное стр-во, техника смешения

- дискуссии по существующей ситуации и возможностях ее улучшения

Название проекта : Проект Трасека - Создание систем управления состоянием дорожного покрытия
 Номер проекта : TELREG 9305
 Страна : Республики в южной части СНГ и Грузии

СЕМИНАР ПО БЕЗОПАСНОСТИ ДВИЖЕНИЯ И НЕКОТОРЫМ АСПЕКТАМ КОНСТРУКЦИИ ДОРОЖНОГО ПОЛОТНА .

Оценка стандартов безопасности движения и конструкции дорог по проекту ТРАСЕКА для магистралей в республиках южной части СНГ и Грузии в сравнении с европейскими стандартами.

1.КАТЕГОРИЯ ДОРОГИ И РАСЧЕТНАЯ СКОРОСТЬ.

1.1 Стандарты СССР 2.05.02-85, 1986

КАТЕГОРИЯ	РАСЧЕТНАЯ СКОРОСТЬ [Км/ч]		
	нормальные условия	участки с сильным боковым ветром	сложные участки
I - a	150	120	80
I - b	120	100	60
II	120	100	60
III	100	80	50
IV	80	60	40
V	60	40	30

1.2 Немецкие стандарты RAS-Q, 1982

КАТЕГОРИЯ		расчетная скорость [km/ч]
категория группы	категория дороги	
A Магистрали вне населенных районов	A I международные магистрали и	90 - 120
	A II дороги дальнего следования	80 - 120
	A III промышленные дороги	60 - 80 (100)
	A IV основные дороги инфраструктуры	60 - 80
B Скоростные дороги проходящие вблизи и через города	B II главные дороги (скоростные)	(60) 70 - 80
	B III основные дороги (скоростные)	(50) 60 - 70
	B IV скоростные дороги	50 - 60
C Главные промышленные дороги	C III главные дороги)	50 (- 70)
	C IV основные дороги	(40) 50 (60)
D Основные промышленные дороги	D IV основные дороги	40 - 50
	D V основные улицы	нет
E Дополнительные промышленные дороги	E V улица	нет
	E VI проезд	нет

В скобках приведены особые случаи

2. СТАНДАРТЫ ДОРОГ КАТЕГОРИИ А (МАГИСТРАЛИ))

2.1 Стандарты СССР 2.05.02-85, 1986

Кат	транспортный поток (ADT) [ед./день]	расчетная скорость [Км/ч]			полосы		обочины вся (покрытая)	разделительная полоса вся (покрытая)	общая ширина
		норм	ветер	трудн	N.	ширина			
I-a	>14000	150	120	80	8	3.75 m	3.75 m (0.75m)	6.00 m (1.00m)	43.50 m
					6	3.75 m	3.75 m (0.75m)	6.00 m (1.00m)	36.00 m
					4	3.75 m	3.75 m (0.75m)	6.00 m (1.00m)	28.50 m
I-b	>14000	120	100	60	8	3.75 m	3.75 m (0.75m)	5.00 m (1.00m)	42.50 m
					6	3.75 m	3.75 m (0.75m)	5.00 m (1.00m)	35.00 m
					4	3.75 m	3.75 m (0.75m)	5.00 m (1.00m)	27.50 m
II	6000-14000	120	100	60	2	3.75 m	3.75 m (0.75m)	--	15.00 m
III	2000-6000	100	80	50	2	3.50 m	2.50 m (0.50m)	--	12.00 m
IV	200-2000	80	60	40	2	3.00 m	2.00 m (0.50m)	--	10.00 m
V	<200	60	40	30	1	(2.25m)	1.75 m (--)	--	8.00 m

2.2 Немецкий стандарт RAS-Q, 1982

Кат	транспортный поток (ADT) [ед./день]	расчетная скорость [km/h]	полосы		обочины вся (покрытая)	разделительная полоса вся (покрытая)	общая ширина	замечания
			N.	ширина				
A I	45 - 61000	100-120	6	3.75 m	4.50 m (3.00 m)	6.00 m (2x1.00m)	37.50 m	i
	29 - 39000	100-120	4	3.75 m	4.50 m (3.00 m)	5.00 m (2x0.50m)	29.00 m	ii
	14 - 27000	90-100	2	3.75 m	3.25 m (1.75 m)	--	14.00 m	iii
A II	54 - 66000	90-100	6	3.50 m	4.00 m (2.50 m)	4.00 m (2x0.50m)	34.00 m	iii iv
	35 - 42000	90-100	4	3.50 m	4.00 m (2.50 m)	4.00 m (2x0.50m)	26.00 m	
	22 - 27000	80-100	2	3.75 m	3.25 m (1.75 m)	--	14.00 m	
	14 - 21000	80-100	2	3.75 m	2.25 m (0.25 m)	--	12.00 m	
A III	33 - 42000	80 (-100)	4	3.25 m	2.00 m (0.50m)	3.00 m (2x0.50m)	20.00 m	v
	11 - 21000	60-80	2	3.25 m	1.75 m (0.25m)	--	10.00 m	
A IV	11 - 14000	60-80	2	3.00 m	1.50 m (--)	--	9.00 m	v

- ЗАМЕЧАНИЯ:**
- (i) 1995 рабочая версия стандартов для дороги шириной 35.50 м:
 - ширина правой полосы 1 x 3.75 m и левой полосы 2 x 3.50 m
 - ширина разделительной полосы 5.00 m (2x0.75m покрытая)
 - (ii) 1995 рабочая версия стандартов для дороги шириной 29.50 м:
 - ширина обочины 4.75 m (3.25m покрытая)
 - ширина разделительной полосы 5.00 m (2x0.75m покрытая)
 - (iii) 1995 рабочая версия стандартов для дороги шириной 15.50 м:
 - количество полос 3 (2+1 попеременно)
 - ширина одной полосы (1) 1 x 3.75 m с обочиной 2.75 m (0.25m покрытой)
 - ширина двух полос (2) 1 x 3.50 m (правой) + 1 x 3.25 m (левой) с обочиной 1.75 m (0.25m покрытой)
 - ширина разделительной полсы 0.50 m (покрытой)
 - (iv) 1995 рабочая версия стандартов для дороги шириной 10.50 м:
 - ширина полосы 3.50 m
 - ширина обочины 1.75 m (0.25m покрытая)
 - (v) 1995 рабочая версия стандартов для дороги шириной 9.50 м:
 - ширина полосы 3.00 m
 - ширина обочины 1.75 m (0.25m покрытая)

3. ИЗБИРАТЕЛЬНЫЕ АСПЕКТЫ БЕЗОПАСНОСТИ ДВИЖЕНИЯ И КОНСТРУКЦИИ ДОРОЖНОГО ПОЛОТНА

- идея переменных радиусов поворота
- размер радиуса поворота после прямого участка
- разметка полос разгона и торможения
- дорожная разметка (материал: дороги 2+1)
- дорожные знаки
- безопасность пешеходов и пользователей дорог в городах где проходят дороги с интенсивным движением
- разметка предупреждающая аварийные ситуации
- содержание дорог зимой
- программы информирования общественности

4. ПРАВИЛА РЕГУЛИРОВАНИЯ

4.1 Точечная система учета нарушений правил дорожного движения (Germany)

Все нарушения влекущие за собой денежный штраф в размере превышающем 55 US\$. подлежат специальной регистрации. Пример использования этого метода вы можете видеть ниже:

нарушение	точки	прим
превышение скорости в городе		
21 - 25 km/ч	●	
26 - 30 km/ч	●●●	
31 - 40 km/ч	●●●●	
41 - 50 km/ч	●●●●●	i
51 - 60 km/ч	●●●●●●	i
> 60 km/ч	●●●●●●●	ii
управление тр ср в состоянии алкогольного опьянения		
0.8 - 1.1 ‰	●●●●	
> 1.1 ‰	●●●●●●●	
просроенный тех осмотр	●●	
управление автомобилем без прав	●●●●●●	
управление не застрахованным тр ср	●●●●●●	
потеря номерного знака	●●●●●●	
управление тр ср не имеющем знака ав ос	●●	
износ протектера (< 1.6 mm)	●●●●	
исчезновение с места происшествия	●●●●●●●	
опасный обгон	●●	
неподчинение знаку ОБГОН ЗАПРЕЩЕН	●●●●	
неподчинение знаку СТОП	●●●	
неподчинение сигналам светофора	●●●	
несоблюдение дистанции	●●●●	
создание аварийной ситуации	●●●●●●●	
езда с выключенными габаритами во время дождя и тумана	●●●	
разворот на магистрали	●●●●	
обгон справа	●●●	

ПРИМЕЧАНИЕ: (i) Лишение прав на один месяц
(ii) Лишение прав на два месяца

Наказание предусмотренное за

СУММА ИЗ 9 ТОЧЕК: Предупредительное письмо с рекомендацией повторно пройти водительские курсы В случае их прохождения снимается 4 точки.

СУММА ИЗ 14 ТОЧЕК: направление на передачу

СУММА ИЗ 18 ТОЧЕК: Направление на психологическую экспертизу В случае отказа лишение прав

4.2 Регулирование загрузки (Germany)

Для транспортных средств полный вес которых превышает >7.5 тонн за превышение расчетной нагрузки на мост предусмотрены следующие санкции

превышение	> 5 %	штраф	70 US\$
	> 10 %		80 US\$
	> 15 %		90 US\$
	> 20 %		140 US\$
	> 25 %		200 US\$
	> 30 %		270 US\$

В случае превышения >30 % может быть рекомендована разгрузка

047 ✓
21.01.97

E U R O P E A N U N I O N - T A C I S

**Technical Assistance to the Southern Republics of the CIS
and Georgia - TRACECA**

TRADE AND TRANSPORT SECTORS

M. Kozsollós
21.01.97

IMPLEMENTATION OF PAVEMENT MANAGEMENT SYSTEMS

PROJECT NO.: TELREG 9305

DRAFT FINAL REPORT

STUDY OF THE COST AND FINANCING OF ROAD USAGE

VOLUME 1, MAIN REPORT

DECEMBER 1996

KOCKS CONSULT GMBH
Consulting Engineers
Koblenz / Germany

in association with

**TECNECON, Economic
and Transport Consultants**
London / U. K.

PHØNIX
Pavement Consultants
Vejen / Denmark

Kocks Consult GmbH · P. O. Box 10 60 · 56010 Koblenz · FRG

The European Commission
Directorate General I A
External Relations
88, Rue d'Arlon

B-1040 Brussels

Tacis IA/C/7

Ref.:

243/Wi-ns/1707

Attn. Mr. D. Stroobants

Head Office Koblenz

Stegemannstraße 32 - 38
56068 Koblenz

Phone: xx (49 261) 13 02-0
Telefax: xx (49 261) 13 02-15 2
Cable: KOCON

Koblenz,

19.12.1996

Dear Sir,

***TRACECA Project: Implementation of Pavement Management Systems
Project Number: TELREG 9305
Study of the Cost and Finance of Road Usage***

We take pleasure in submitting to you the draft final report of the above study comprising Volume 1 Main Report and Volume 2 Annex for your review and comment.

The report is submitted in six copies, five bound and one loose leaf. A copy of Volume 1 has been forwarded by E-Mail to the Tacis Coordinating Units in the eight recipient states as well as to the Tacis Monitoring & Evaluation Central Asia in Almaty.

The Russian version is presently under translation and will be submitted together with the diskette as soon as completed.

Yours faithfully

KOCKS CONSULT GMBH
Consulting Engineers



Ulrich Sprick



Ulrich Willems

Copies to: Tacis CU, all 8 recipient states

COVER PAGE 1

STUDY OF THE COST AND FINANCING OF ROAD USAGE (DRAFT 12/96)

REPORT COVER PAGES

Project Title	:	Traceca Project - Implementation of Pavement Management Systems
Project Number	:	TELREG 9305
Country	:	The Southern Republics of the CIS and Georgia

	Local Operator	EC Consultant
--	----------------	---------------

Name	:	Concern UZAVTOYUL	KOCKS CONSULT GMBH Consulting Engineers
Address	:	68 'a' Pushkin Street 700000 Tashkent UZBEKISTAN	Stegemannstraße 32 - 38 56068 Koblenz GERMANY
Tel. number	:	(3712) 682526 and 361595	xx49 - 261 - 1302-0 (operat.) xx49 - 261 - 1302-143 (direct)
Fax number	:	(3712) 682711	xx49 - 261 - 1302 - 152
Telex number	:	--	862807
Contact person	:	Vohid Normatovich Azamov, State Road Inspector	Werner P. Weiler
Signatures	:		

Name	:	Ministry of Transport (MoT), State Institute of Road Design KYRGYZDORTTRANSPROJEKT (K)	KOCKS CONSULT GMBH Consulting Engineers
Address	:	42 Isanov Street (MoT) Bishkek 720079 KYRGYZSTAN	
Tel. number	:	(3312) 216674 (MoT) or 444187 (K)	
Fax number	:	(3312) 213667 (MoT) or 444193 (K)	
Telex number	:	--	
Contact person	:	Akunov Kuwan Akunowitsch, Head of Roads Department (MoT) Levan M. Alibegashvili, Director (K)	
Signatures	:		

COVER PAGE 2

STUDY OF THE COST AND FINANCING OF ROAD USAGE (DRAFT 12/96)

Local Operator	EC Consultant
----------------	---------------

Name	: Ministry of Transport & Communications, Department of Highways (DoH), Joint-stock company KAZDORNII (K)	KOCKS CONSULT GMBH Consulting Engineers
Address	: 9 Emtsov Street Almaty, 480061 KAZAKHSTAN	
Tel. number	: (3272) 324769 (DoH) or 400447 (K)	
Fax number	: (3272) 324449 (DoH) or 400819 (K)	
Telex number	: --	
Contact person	: Amangeldy N. Yelgonov, Dept. Director (DoH) Oleg A. Krasikov, Deputy Director (K)	
Signatures	:	

Name	: State Concern AZERAVTOYOL	KOCKS CONSULT GMBH Consulting Engineers
Address	: 72 A, Hadjihekov Street 370010 Baku AZERBAIJAN	
Tel. number	: (8922) 933556	
Fax number	: (8922) 930045	
Telex number	: 142272 YOL	
Contact person	: Shahin H. Hasanov, Vice President and Project Manager for TRACECA-PMS	
Signatures	:	

COVER PAGE 3

STUDY OF THE COST AND FINANCING OF ROAD USAGE (DRAFT 12/96)

Local Operator	EC Consultant
----------------	---------------

Name	: Concern TUKMENAUTOELLARI	KOCKS CONSULT GMBH Consulting Engineers
Address	: 744000 Ashgabat TURKMENISTAN	
Tel. number	: (3632) 245487	
Fax number	: (3632) 255379 and 511678	
Telex number	: --	
Contact person	: Vladimir Volodin, Vice President	
Signatures	:	

Name	: State Concern of Roads, SAKAVTOGSA	KOCKS CONSULT GMBH Consulting Engineers
Address	: 29a Gagarin Street 380060 Tbilisi GEORGIA	
Tel. number	: (99532) 376604	
Fax number	: (99532) 376458	
Telex number	: 212189	
Contact person	: Tariel Mdivnishvili, Deputy Chairman	
Signatures	:	

COVER PAGE 4

STUDY OF THE COST AND FINANCING OF ROAD USAGE (DRAFT 12/96)

Local Operator	EC Consultant
----------------	---------------

Name	: Armenian Road Directorate (ARD)	KOCKS CONSULT GMBH Consulting Engineers
Address	: Yerevan ARMENIA	
Tel. number	: (3742) 586601	
Fax number	: (3742) 151876 or 151830	
Telex number	: 212189	
Contact person	: Nikolai Elarian, Director (ARD)	
Signatures	:	

Name	: Ministry of Transport and Roads TAJIKIPROTRANSSTROY	KOCKS CONSULT GMBH Consulting Engineers
Address	: Ayni Street 14 734042 Dushanbe TADJIKISTAN	
Tel. number	: (3772) 215380 or 212020	
Fax number	: (3772) 212003	
Telex number	:	
Contact person	: Mirzoev Timur Dodojenovia	
Signatures	:	

COVER PAGE 5

STUDY OF THE COST AND FINANCING OF ROAD USAGE (DRAFT 12/96)

Date of report : 10. December 1996

Reporting period : January to December 1996

Author of report: R. A. W. Smith, Transport Economist (TecnEcon)

EC M & E Team			
	(name)	(signature)	(date)
EC Delegation			
	(name)	(signature)	(date)
TACIS Bureau (Task Manager)			
	(name)	(signature)	(date)

CONTENTS

TACIS TRACECA MAP

- 1 INTRODUCTION

- 2 ROAD TRANSPORT COSTS
 - 2.1 General
 - 2.2 Road Costs
 - 2.3 Road User Costs
 - 2.4 Other Costs
 - 2.5 The Distinction Between Economic and Financial Costs

- 3 VEHICLE OPERATING COSTS
 - 3.1 Sources of Data
 - 3.2 Estimating Vehicle Operating costs
 - 3.3 Relative Importance of Vehicle Operating Cost Components
 - 3.4 Summary Base Vehicle Operating Costs by Vehicle Type and Country
 - 3.5 The Effect of Road Conditions on Vehicle Operating Costs
 - 3.6 Economic Significance of Vehicle Operating Costs
 - 3.7 Potential Significance of Passenger and Goods Delay Costs

- 4 ECONOMIC IMPACT OF ROAD MAINTENANCE
 - 4.1 Introduction
 - 4.2 Road Maintenance, Road Condition and Road User Costs
 - 4.3 The Effect of Axle Loads on Road Pavements
 - 4.4 The Effects of Different Types of Trucks on Pavements
 - 4.5 Vehicles and Pavement Design in the TRACECA Countries

- 5 THE FINANCING OF ROADWORKS
 - 5.1 General
 - 5.2 Road Funds
 - 5.3 Road User Charges and Road Related taxes
 - 5.4 Road Budgets and Expenditure on Roads

- 6 ROAD USE COSTS AND EXPENDITURE
 - 6.1 General
 - 6.2 The Characteristics and Utilisation of the Main Road Network
 - 6.3 Indicative Estimates of Road Use Costs

- 7 ROAD USER CHARGES AND COST RECOVERY
 - 7.1 Basic Principles
 - 7.2 An Appropriate Structure of Road User Charges
 - 7.3 Road User Charges Required for Cost Recovery

TABLES IN MAIN REPORT

- Table 3.1 Petrol and diesel prices
- Table 3.2 Basic vehicle operating costs by component
- Table 3.3 Summary of base vehicle operating costs
- Table 3.4 Total vehicle operating costs at different road surface roughness levels

- Table 4.1 Example of economic impact of maintenance and rehabilitation
- Table 4.2 Example of economic impact of deferred rehabilitation
- Table 4.3 Pavement damaging potential of different types of correctly loaded truck

- Table 5.1 TRACECA countries - expenditure on roads 1983/85 - 1995/96

- Table 6.1 Pavement strength indicators in selected C.I.S. countries
- Table 6.2 TRACECA countries - vehicle kilometres by main road category and vehicle type
- Table 6.3 TRACECA countries - ESAL kilometres by main road category and vehicle type
- Table 6.4 Average annual road use costs under optimum maintenance strategies
- Table 6.5 TRACECA countries - Road use costs and current expenditure levels on roads

- Table 7.1 Indicative fuel levies and annual vehicle licence fees required for full cost recovery


European Union



TRACECA



THE SILK ROUTE
FOR THE 21ST CENTURY

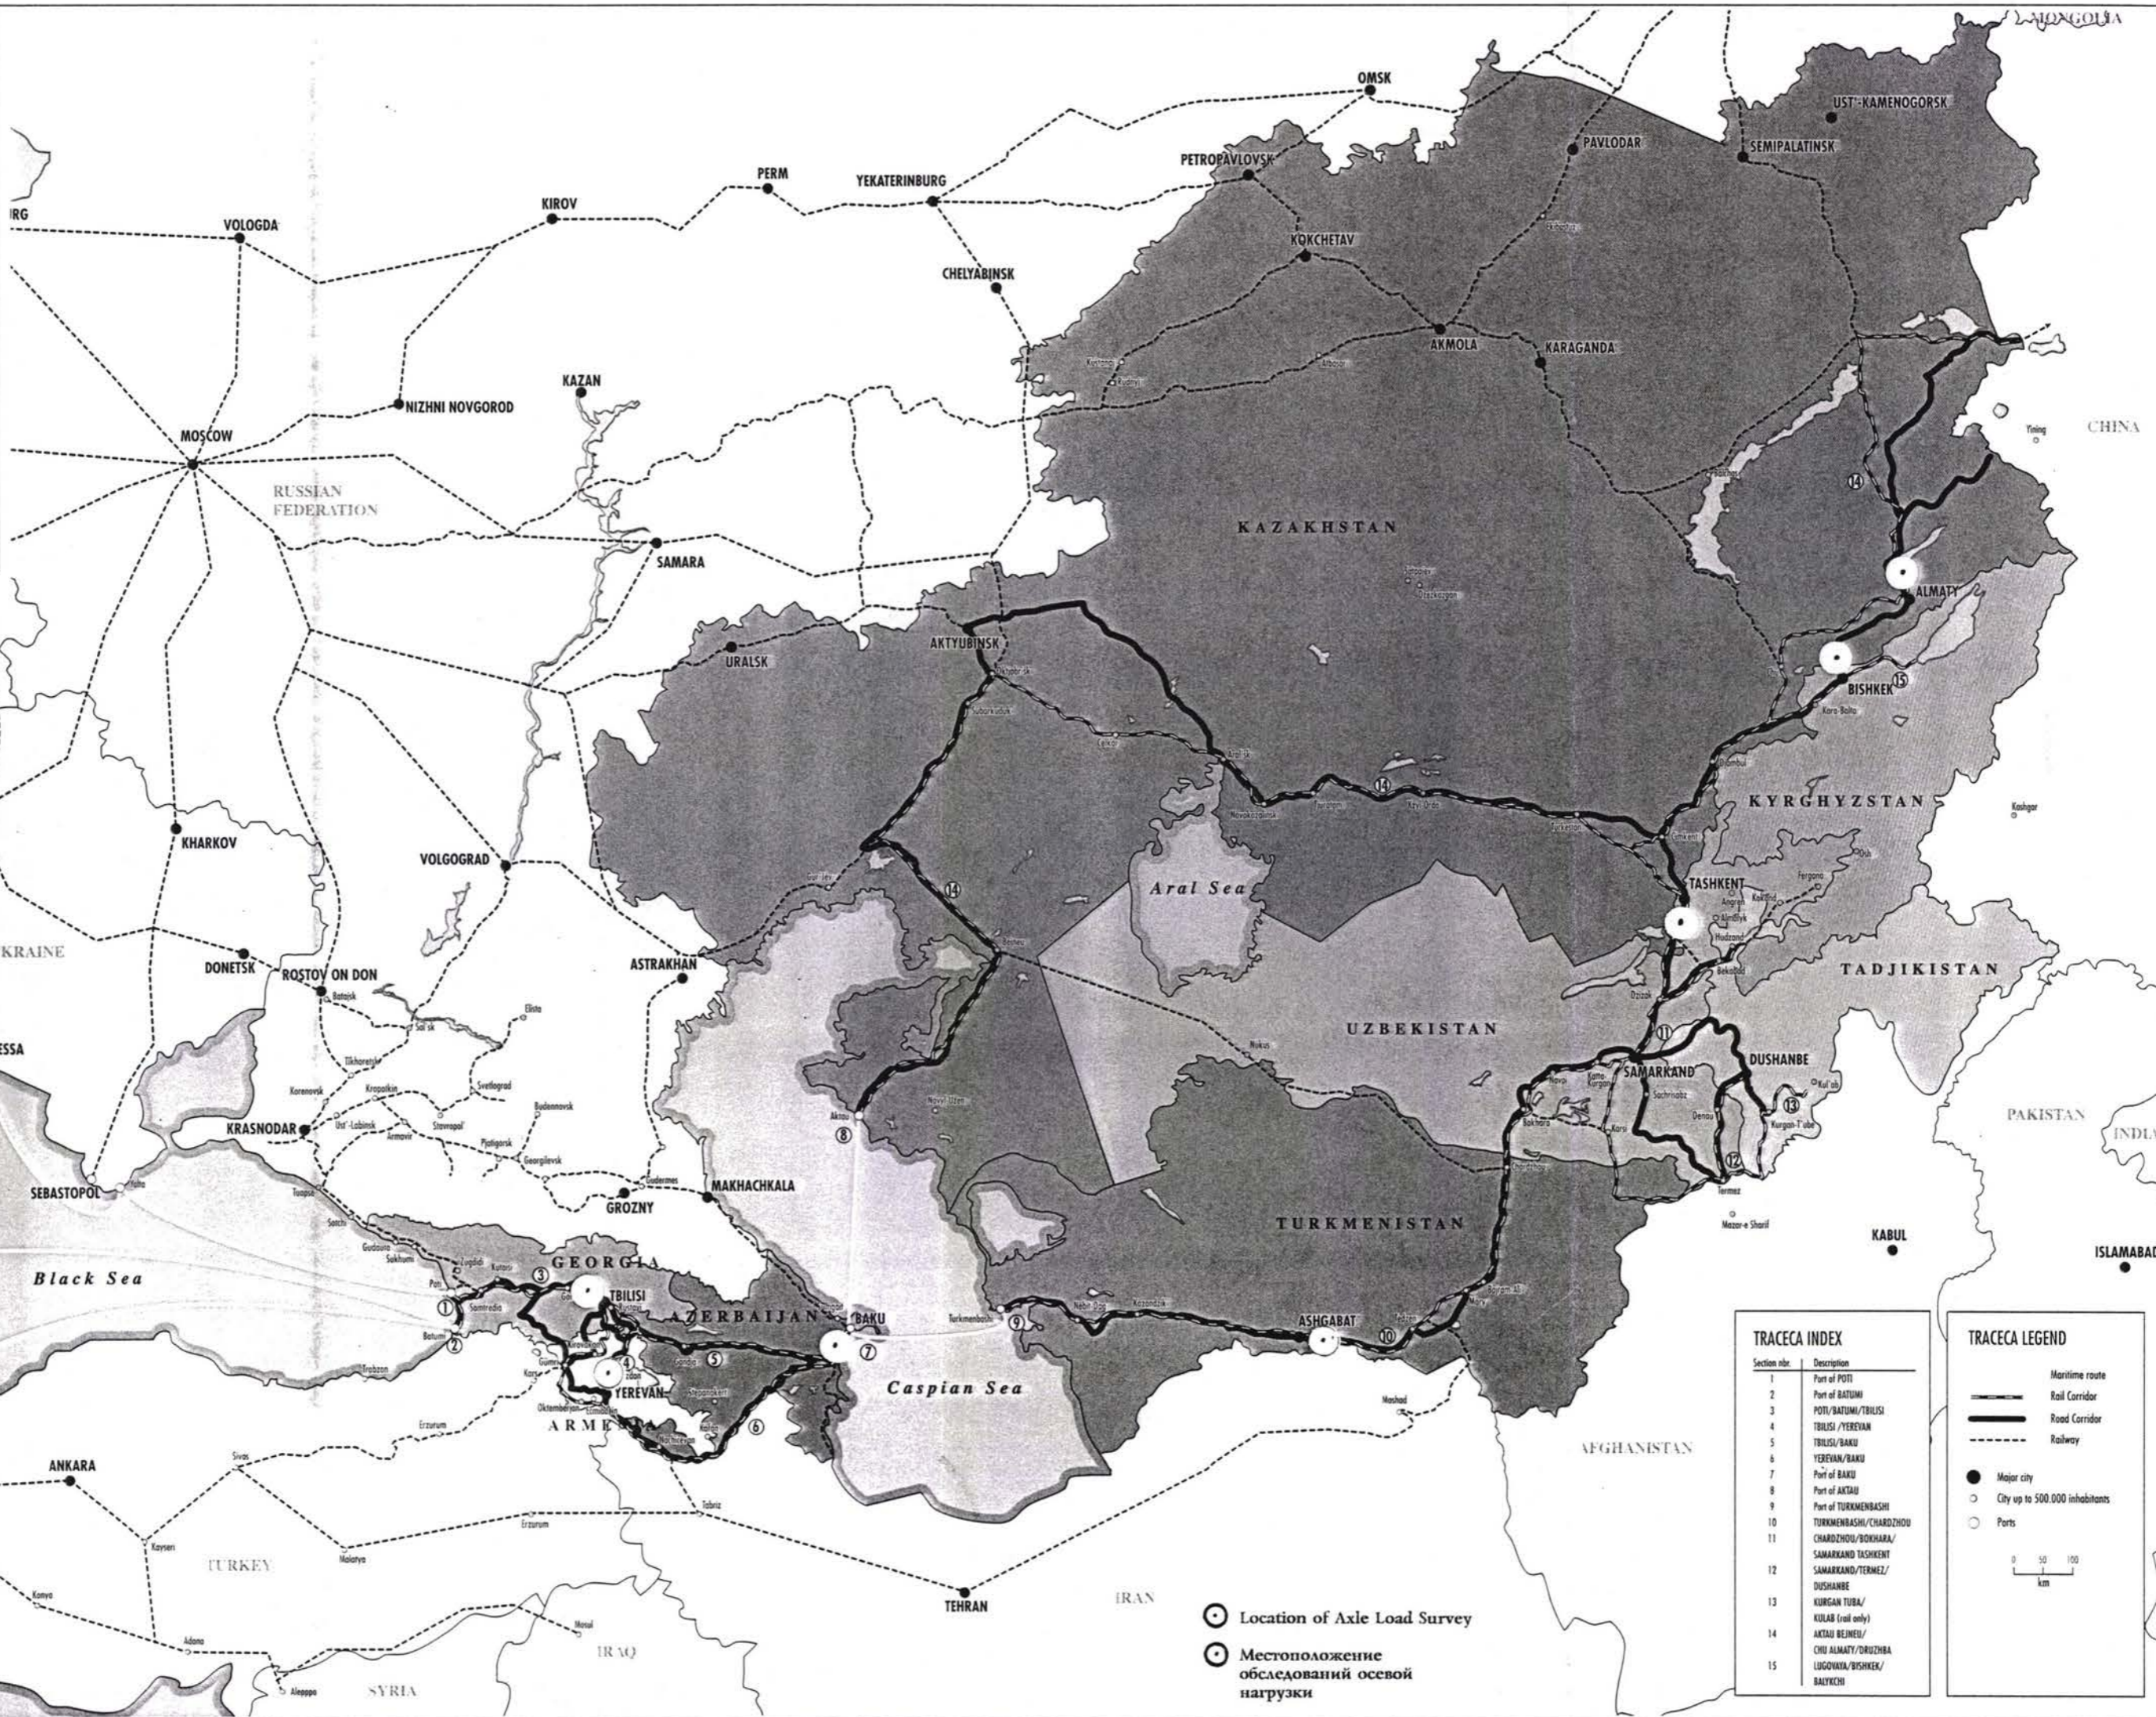

TRACECA INDEX

Section nbr.	Description
1	Part of POTI
2	Part of BATUMI
3	POTI/BATUMI/TBILISI
4	TBILISI/YEREVAN
5	TBILISI/BAKU
6	YEREVAN/BAKU
7	Part of BAKU
8	Part of AKTAU
9	Part of TURKMENBASHI
10	TURKMENBASHI/CHARDZHOU
11	CHARDZHOU/BOXHARA/SAMARKAND/TASHKENT
12	SAMARKAND/TERMEZ/DUSHANBE
13	KURGAN TUBA/KULAB (rail only)
14	AKTAU BEINEI/CHU ALMATY/DRUZHBA
15	LUGOVAYA/BISHKEK/BALYKCHI

TRACECA LEGEND

- Maritime route
- Rail Corridor
- Road Corridor
- Railway
- Major city
- City up to 500,000 inhabitants
- Ports

0 50 100 km

- Location of Axle Load Survey
- Местоположение обследований осевой нагрузки

1

INTRODUCTION

This report on the Cost and Financing of Road Usage is one of the reports being produced under the European Union - TACIS sponsored TRACECA Project for the Implementation of Pavement Management Systems which is being carried out by Kocks Consult GmbH of Germany in association with Phønix Pavement Consultants a/s of Denmark and TecnEcon Limited of the United Kingdom. The geographical coverage of this study and the project of which it is a part includes eight countries falling within the area of the European Union's TRACECA initiative. These countries are Armenia, Azerbaijan, Georgia, Kazakhstan, Kyrgyzstan, Tadjikistan, Turkmenistan and Uzbekistan.

The data required for the study were obtained during the course of visits to the project countries between March and October 1996 as well as from a previous study undertaken by the Consultant in Turkmenistan in 1995 and the relevant updated data, findings and recommendations from that study have been incorporated into the present study. Considerable use has also been made of road feasibility studies carried out by other international consultants in Azerbaijan, Kazakhstan, and Kyrgyzstan and by one of the present consultants in Armenia. A certain amount of information on Tadjikistan has been made available to the Consultants by various multinational donor agencies.

In view of the number of countries covered by this study the problem of the currency units to be used in the presentation of the findings had to be given careful attention. The use of a domestic currency plus at least one international currency for each country would have been unwieldy in view of the amount of data to be analysed and presented. It has been decided, therefore to standardise on one international currency and because of its familiarity in all the countries covered, the currency chosen was the United States dollar. The use of the dollar also has the advantage that it is less vulnerable to the effects of local inflation than the individual currencies in use in the TRACECA countries. The ECU is not yet familiar to most officials in these countries and therefore it was decided not to use it in the analyses undertaken. The dollar exchange rates used were based on the following rates which were those prevailing in mid 1996 or at the time of the field visits.

Armenian Dram	405	Kyrgyz Som	11.5
Azerbaijan Manat	4,300	Tajik Roubles	290
Georgian Lari	1.24	Kazakhstan Tenge	66
Turkmenistan Manat	4,000	Uzbekistan Som	42

The aims and scope of the study are set out in the extract from the Terms of Reference for the Pavement Management System Implementation project included in Annex 1. They can be summarised as requiring a rigorous analysis of the various elements making up the total costs of road use and the extent to which road use costs are being covered by present levels of expenditure in each country. The study is also required to explain the relationships between road user costs and road condition on the one hand, and between road condition and maintenance practice on the other. These elements are closely interlinked and an important aim of the study is to demonstrate the economic impact of changes in road condition resulting from different levels of maintenance expenditure. An important requirement of the Terms of Reference is the presentation of recommendations for an appropriate structure of road user charges based on the results of the road use costs analyses undertaken.

The time available for this study dictated that a short cut approach to road use cost analysis had to be adopted and this implied that traffic and road condition data had to be readily available. In general, locally available traffic data supplemented by the Consultants' axle load surveys have met the requirements of the study, but only for the main inter state and intra state inter urban road networks. Consideration of urban roads was outside the scope of this study given available time and other resource constraints. The rudimentary data availability for the district and local roads also precluded their inclusion. The lack of information on pavement strength data for the main inter urban road networks in all but two of the countries has posed some difficult but not insuperable problems. The limitations of the data base for a study of this nature should, however, be kept firmly in mind when considering the final results and recommendations.

Considerable assistance has been received from the respective highway institutions in all recipient states covered by the study and the Consultants would like to express their gratitude for the friendly co-operation extended to them during the course of their work.

2 ROAD TRANSPORT COSTS

2.1 General

This report is concerned with the costs of road usage in the TRACECA states and with methods of financing these costs. In this chapter the different categories of road costs are briefly introduced and their significance explained. In subsequent chapters road engineering and road user costs are examined in greater detail and the relationship between road maintenance and rehabilitation standards, road condition and road user costs is established.

Road transport costs are made up of the costs of road infrastructure provision and maintenance, road user costs and other costs such as environmental costs imposed on society by road transport. In this report the main concern is with the first two broad categories of road transport costs. The environmental impact of road infrastructure maintenance and rehabilitation is usually considered to be relatively minor as compared with the potential impact of major new road construction or realignment initiatives. To the extent that this study is mainly about the cost and financing of road network maintenance and rehabilitation, environmental costs are not considered in any detail.

The aim of appropriate highway management policy should be to minimize total life cycle road transport costs over a defined network. This immediately focuses attention on the relationship between road costs and road user costs on the one hand, and on the network to be considered on the other. In most of the TRACECA states the road network comprises inter state ("Magistrale") roads, republican or intra state roads, regional or oblast roads and district and-or local roads. Urban roads usually fall within one or more of these categories.

Logically discussions of road costs and methods of financing them should be at the total road network level since most road user charges are levied on road vehicles and their use regardless of what roads they are used on. An exception to this is toll road charging. In practice, however, data constraints usually mean that initially analysis has to be concentrated on the main road network. These will usually account for a very high proportion of inter urban vehicle kilometres. For administrative reasons urban roads often come within the area of responsibility of municipal road departments rather than the national highway department or agency. This often results in differences in the coverage of routine data collection which can make it difficult to include urban road networks in the analysis without a large increase in research effort. This is a more serious problem than the omission of local and district road networks because urban traffic contributes a much higher proportion of vehicle kilometres and should, therefore, have a significant influence on total road transport costs.

The time and resources available for this study have meant that considerable reliance has had to be placed on data already available within the individual highway institutions and departments in the TRACECA states. These organisations are mainly responsible for the inter urban main road networks and traffic and other data availability is also mainly confined to these networks. For this reason, the study's analyses and findings are also confined to the inter urban main road networks comprising the inter state and intra state roads. Urban roads are not included except where they form part of one or other of the above main road categories. The extent to which urban roads are included in the main road networks varies from country to country, but in general they are best regarded as being separate.

2.2 Road Costs

Road costs are the costs of road infrastructure provision and maintenance. They are the costs incurred by the government department, institution or agency which has the task of managing the relevant highway network. These costs are sometimes called agency costs and it is quite common for more than one agency to be involved. In addition to the national road institution or department which is responsible for road network administration, other government departments supplying traffic police services and customs inspection posts at international borders, for example, are also involved in the highway sector.

Road costs can be divided into fixed and variable costs and this distinction is important in the analyses of road use costs which form the basis of the type of road user charging policy discussed later in this report. Fixed costs are those costs which are independent of road traffic and include most of the costs of administering or managing the road network. In practice, there is a fixed and variable (traffic dependant) element in most categories of road costs. Estimates made by the World Bank suggest that for main roads fixed costs could account for the following approximate proportions of the main categories of recurrent costs.

- per cent of main road policing costs
- per cent of administration costs
- per cent of routine maintenance costs
- per cent of periodic maintenance costs and
- per cent of interest charges on road loans, where relevant.

The above proportions can be regarded as an approximate guideline and should not be taken to be applicable to all circumstances.

Traditionally, road costs were equated with the costs incurred by the road agency or highway department responsible for the provision and maintenance of road infrastructure. This rather narrow view of road costs was reinforced by the usual methods of annual road budget estimation and allocation.

The main problem with this traditional approach was that it did not take sufficient account of or attempt to quantify the costs being incurred by the users of the road network. These are now recognised as being significantly higher in most cases than the agency costs of road management. In recent years it has been widely recognised that road user costs should be taken into account when decisions are being made about the appropriate level of expenditure on roadworks.

A common problem in all the TRACECA states is that the cost of maintaining and rehabilitating the main road networks is significantly higher than the budgets being made available for the purpose. The economic and engineering results of this situation are examined in some detail in Chapters 3 and 4. However, the implications are fairly clear. Unless adequate financing for road maintenance and rehabilitation can be made available from the traditional general government budgetary sources, either alternative financing mechanisms have to be found, or the size of the core main road networks which can be maintained to an adequate standard will have to be reduced.

2.3 Road User Costs

2.3.1 Definition of Road User Costs Used in this Study

Road user costs comprise vehicle operating costs, passenger time costs, the costs of goods in transit and accident costs. In practice, in relatively low income countries such as the TRACECA states passenger time costs are not particularly significant in comparison with the costs of vehicle operation. The situation is completely different in the richer economies of north America and western Europe, for example, where passenger time costs are the dominant element in road user costs both because the scale of people movements and because of high personal incomes.

In this study attention is focused on the vehicle operating cost component of road user costs. The relative insignificance of the contribution of passenger time costs at current and foreseeable per capita income levels in the short to medium term has already been mentioned and this is illustrated below and in greater detail in Chapter 3. The cost of goods in transit is an even less important component of road user costs given the scale of road rehabilitation and maintenance effects on road conditions. International evidence suggests that a major reduction in travel time is required before there is a significant effect on the cost of goods in transit. The reductions in travel time resulting from improved road maintenance and rehabilitation are incremental rather than major and the effects on the cost of goods in transit are very minor. The relative unimportance of the cost of goods in transit as a component of road user costs is also illustrated below and in Chapter 3.

Accident costs are very difficult to quantify adequately unless data on the cost and frequency of accidents in relation to specific road features and locations is already available at the required level of detail. This is seldom the case unless an appropriate research initiative has been undertaken. The available data on road accidents in the TRACECA states does not permit accident costs to be quantified at a meaningful level of precision without a level of field research input which is well beyond the resources of this study. However, it is unlikely on the basis of international evidence that the omission of accident costs from road user cost estimates would have a significant impact on the results of road user cost based analyses in the TRACECA states

The omission of time costs of goods and passengers and accident costs means that the estimates of road user costs based on vehicle operating costs are slightly conservative, but not excessively so. Most of the analyses involving road user costs are concerned with changes in costs rather than absolute costs. This fact further reduces the potential impact of omitting time costs of goods and passengers.

2.3.2 The Importance of Road User Costs in Total Transport Costs

Road user costs are by far the most important component of total road transport costs and vehicle operating costs are the most important element in road user costs in the TRACECA states. Estimates prepared by consultants Carl Bro International a/s in their 1995 engineering and economic feasibility study of the improvement of the Bishkek-Osh road in Kyrgyzstan suggest that the percentage contribution of passenger time costs and goods time costs to total road user costs was as follows:

• Passenger time costs	Cars	5 % - 8 %
	Buses	11.% - 15.%
	Trucks	0.2 % -0.4 %
• Goods time costs	Cars and buses	0 %
	Trucks	0.3% - 0.5 %

These findings are in agreement with our own sample analyses for other TRACECA states.. When the structure of traffic and the distribution of vehicle kilometres is taken into account the overall share of vehicle operating costs in road user costs is 92% to 95% for passenger cars, 85% to 89% for buses and over 99% for trucks.

Road user costs are overwhelmingly the most important component of total road transport costs in every country. In the TRACECA states annual road user costs on inter urban main roads currently amount to around US\$ 7.9 billion. If the appropriate amounts were being spent on maintenance and rehabilitation, average annual expenditure on the main road networks in the TRACECA states would be of the order of US\$ 531 million. Actual annual expenditure is nearer US\$127 million. Even at optimum annual expenditure levels, road costs would amount to no more than 6 per cent of total road transport costs.

It can be seen from the above that quite small changes in road condition will have a disproportional large impact on road user costs and, hence, on total transport costs. The changes in road condition resulting from inadequate maintenance levels will, therefore, have a significant, adverse economic impact via increasing road user costs. This has important implications for planning road expenditure strategies and devising optimum road maintenance programmes. It is also the main reason why road maintenance and rehabilitation strategies should be based on the results of engineering and economic analysis rather than just on engineering estimates.

2.4 Other Costs

Potentially the most important external cost of road transport is environmental pollution, including noise pollution. In practice, however, the main environmental impacts are attributable to new road projects on new alignments and urban road traffic rather than to road maintenance and rehabilitation. An important contributor to the environmental costs of road transport in the TRACECA states is the low standards of vehicle emission control, but this is not something that can be solved by road improvements.

The omission of accident costs from our estimates of road user costs has already been discussed above. External environmental costs are also excluded on the grounds that they are not quantifiable within the context of a study such as this and because their impact on road maintenance and rehabilitation policy is unlikely to be significant.

2.5 Economic and Financial Costs

In economic and engineering feasibility studies of road investment projects it is customary to distinguish between financial and economic costs. Economic analyses should be based on economic costs which reflect real resource costs to the economy. In practice this means that taxes are excluded from economic costs but any subsidy element in costs is included. Economic costs should also include adjusted or shadow prices, where perceived costs do not reflect market prices. Economic analyses are usually carried out in constant price terms and there should, therefore, be no inflation factors built into economic costs.

In the context of planning highway expenditure requirements, notably optimum road maintenance and rehabilitation strategies, economic costs should be used in the relevant engineering and economic feasibility analyses. Once the optimum strategies have been established, however, it is necessary to present the roadworks costs as conventional financial costs for budgeting and programming purposes.

In most of the TRACECA states there are considerable practical difficulties in establishing what economic costs are. While it is relatively simple to discover what taxes should be paid and, hence, eliminated from economic costs, it is very difficult to establish accurately what taxes actually are paid. There is a danger in understating economic costs by deducting taxes which have not actually been paid. Similarly, there are considerable difficulties in untangling complex cross subsidy elements in prevailing prices. These factors plus the considerable amount of fieldwork and analysis required to develop a set of appropriate shadow prices for individual countries means that rigorous economic costing cannot be undertaken within the relatively short time periods which have been made available for road transport studies in the region in recent years.

In this study the analysis of vehicle operating costs has been based on financial costs. However, the analysis of optimum road use costs is based on the World Bank's analyses of optimum maintenance and rehabilitation strategies using international evidence and economic costs. Even if all taxes were paid in the TRACECA countries, the tax component of financial vehicle operating costs would not be as significant as it is in most western European countries and economic and financial vehicle operating costs are not, therefore, significantly different. Given the low level of vehicle taxes, the main tax element is in automotive fuels and even this is relatively small by international standards.

3 VEHICLE OPERATING COSTS

3.1 Sources of Data

In this chapter an analysis of financial vehicle operating costs for each of the TRACECA countries is presented. As explained in Chapter 2, attention has been focused on vehicle operating costs as by far the most important component of road user costs. However, the potential significance of including the cost of passenger time savings and the cost of goods in transit is also examined. The main purpose of the analysis is to demonstrate the importance of vehicle operating costs in total transport costs and to show how they vary with road condition.

The inputs for the vehicle operating costs analyses for the TRACECA countries are based on data collected during field visits and on information in other consultants' road feasibility study reports. Information for Turkmenistan was derived from the Consultant's 1995 study for the European Bank for Reconstruction and Development entitled "Review of Administration and Financing of Road Improvement". This information, notably on prices, was updated to reflect changes in Turkmenistan since 1995.

Considerable use has also been made of the following consultancy studies in the TRACECA countries which incorporate vehicle operating cost analyses in their findings:

- Road Rehabilitation Study in Kyrgyzstan for the Asian Development Bank. This feasibility study of the improvement of the Bishkek-Osh road was undertaken in 1995 by Carl Bro International a/s, Hoff and Overgaard a/s and Upham International Corporation
- Prefeasibility Study of the Baku-Astara Road in Azerbaijan which was carried out by Wilbur Smith and Associates for EC TACIS in 1995 and 1996.
- Road Rehabilitation Project Kazakhstan undertaken in 1995 for the Asian Development Bank by Louis Berger International Inc. in collaboration with Kazdornii.

Reference has also been made to a number of earlier studies, notably the 1991 "Road and Road Transport Study in Russia, Ukraine, Kazakhstan and Belarus" which was produced by TecEcon and CowiConsult for the European Bank for Reconstruction and Development, and TecEcon's "Armenia Highway Survey" produced in 1994 for EC TACIS.

The findings of the following two studies carried out in former communist countries have also been of interest in the development of vehicle operating costs estimate in the TRACECA countries:

- The 1993 Road User Charges Study in Romania by NEDECO, DHV Consultants and the Netherlands Economic Institute for the World Bank and the Romanian Administration of Roads.
- The 1995 Study of Investment and Maintenance Strategy for the National and Provincial Roads in Vietnam produced in 1995 by Scott Wilson Kirkpatrick for the United Kingdom Overseas Development Administration

Finally, estimates of vehicle operating costs by Kazdornii in Kazakhstan and the Armenian Road Directorate's Project Implementation Unit in Yerevan both utilising all or part of the vehicle operating cost sub model in the World Bank's Highway Design and Maintenance Standards Model - HDM III - have been a particularly useful source of information.

3.2 Estimating Vehicle Operating Costs

The vehicle operating costs estimates developed for each of the TRACECA countries are based on the use of the vehicle operating sub model from the World Bank's HDM-III model. This vehicle operating cost model predicts the various components of vehicle operating costs based on assumptions about road and vehicle characteristics and unit costs. For each country six representative categories of vehicles were selected for costing and the operating costs for those vehicles were taken to be representative of the costs of all vehicles in those classes in each country. The following classes of representative vehicle types were selected for vehicle operating cost analysis:

- Passenger cars
- Utility vehicles: comprising minibuses and pickups
- Large buses
- axle trucks
- axle trucks
- Trucks with more than 3 axles

This vehicle classification is the same as that used in the traffic analyses undertaken for this study and in the traffic and vehicle operating cost inputs for the Pavement Management System model being implemented in the TRACECA countries. In each country a representative vehicle model was selected within each vehicle category and the cost estimates were developed for that model. Every attempt has been made to ensure that the representative models are the most widely used within their class in each country. Only in Georgia was it possible to base the selection of representative vehicle models on vehicle registration data. In the other countries vehicle registration data was not available at an adequate level of detail for this to be possible. In these countries the selection of representative vehicle models was based on the results of the Consultant's moving observer traffic counts and on visual observations in bus and truck parks. Reference was also made to the representative models selected for costing in the other consultants' studies in Kyrgyzstan, Kazakhstan, Azerbaijan, Armenia and Turkmenistan referred to above. Most of the vehicles in use in the TRACECA countries are of Russian manufacture and there is, therefore, a much higher degree of uniformity in the representative models than would normally be expected in a multi-country study. Details of the representative vehicle types and models used in the analysis are set out in Annex 3, Table A.3.1.

Data inputs required for the operation of the vehicle operating cost sub model (VOCM) can be divided in to the following six categories:

- Roadway characteristics
- Vehicle characteristics
- Tyre wear data
- Vehicle utilisation data
- Unit costs
- Additional model coefficients

Where local data is not available for specified non-cost inputs, default values from within the model can be used. Most of the additional model coefficients used in this study are based on default values.

A detailed listing of all inputs for each representative vehicle for each country is set out in Annex 3, Table A.3.2.

A number of general observations on the input data are in order. Most of the technical coefficients relating to vehicle performance are based on default values within the VOCM. Technical information on the representative truck models, which are all of Russian or Ukrainian manufacture, has been obtained from other studies and technical literature.

Vehicle utilisation levels are low by international standards and this reflects the depressed economic conditions in all the TRACECA countries during the past 5 years and the problems faced by vehicle operators in a transition economic environment. The age of the vehicle fleet in each country is high by international standards and the sale of new vehicles is very low.

The scarcity of new vehicles means that it is difficult to obtain realistic information on the prices of new as opposed to second hand vehicles. The prices of second hand vehicles were checked at the weekly vehicle auctions in the capitals of the TRACECA countries visited and prices of low kilometrage vehicles was noted as a guide to estimating new vehicle prices. Vehicle prices are low by international standards and this reflects their predominantly Russian origin. This is particularly true for heavy trucks where Russian models within a given category tend to be significantly smaller than their international counterparts and also much cheaper.

The prices of petrol and diesel are important inputs in the VOCM and they are an important determinant of unit vehicle operating costs. Although there are large variations in the retail price of automotive fuels in the TRACECA countries, it is fair generalisation to state that these prices are also low by comparison with the prices in most advanced industrial countries and many developing countries. The average prices of petrol and automotive diesel in each country are summarized in Table 3.1. In certain cases these prices are the mid point of a range of retail prices observed during fieldwork. In most TRACECA countries the average 1996 petrol price is within the range US\$ 0.20 - 0.35 per litre and the diesel price is within the range US\$ 0.20 - 0.30 per litre. Prices in Tadjikistan are significantly higher and in Turkmenistan significantly lower than these ranges. The price of diesel in Azerbaijan is also very low, both in relation to the price of petrol and in relation to diesel prices in most other TRACECA countries.

TABLE 3.1: PETROL AND DIESEL PRICES

Country	Automotive Fuel Prices (1996 average level)	
	Petrol (US\$/litre)	Diesel (US\$/litre)
Armenia	0.35	0.30
Azerbaijan	0.35	0.14
Georgia	0.28	0.21
Kazakhstan	0.29	0.20
Kyrgyzstan	0.22	0.20
Tajikistan	0.43	0.40
Turkmenistan	0.10	0.07
Uzbekistan	0.38	0.30

Note: In some countries the indicated fuel price is the mid point of a range of prices observed during fieldwork.

Source: Fuel price data and Consultant's estimates

3.3

Relative Importance of Vehicle Operating Cost Components

The main vehicle operating cost components analysed in the VOCM are the following:

- Automotive fuel consumption
- Lubricants consumption
- Tyre consumption
- Crew time
- Maintenance spare parts consumption
- Maintenance labour time
- Depreciation and interest
- Overheads (in financial costs)

The relative importance of these operating cost components varies according to relative prices and to the vehicle operating environment as dictated by road geometry and surface roughness. Fuel consumption is conventionally regarded as a major component of vehicle operating cost and this is largely true in most of the TRACECA countries. In Turkmenistan, however, where fuel prices are exceptionally low, fuel is a relatively minor cost item in vehicle operation. Fuel consumption also becomes relatively less important in overall operating costs as road conditions deteriorate and vehicle speeds decline. This is counterbalanced by a more than proportionate increase in the importance of maintenance spare parts consumption and vehicle maintenance costs in general.

For each TRACECA country the base financial vehicle operating costs by vehicle type are set out in Table 3.2. Base vehicle operating costs are the costs on a paved road in fair condition with surface roughness of IRI 5 metres / kilometre. The most significant components of base costs are fuel, maintenance parts, depreciation and, for heavy vehicles only, tyres. Fuel generally accounts for 20 - 35 per cent of total costs for all vehicles except utility vehicles, where the proportion is higher. Maintenance parts consumption is responsible for around 20 - 25 per cent and depreciation for 10 - 25 per cent of total costs. Heavy goods

vehicles and large buses have more tyres and higher wear and tear on them and for these vehicles tyre costs can make up between 20 and 30 per cent of base operating costs.

The vehicle operating cost proportions shown in Table 3.3 and in Annex 3 Table A.3.4 are not fixed over the whole range of operating conditions. Rising surface roughness levels reflecting deteriorating road condition results in declining vehicle speeds which reduces the relative importance of fuel consumption in total costs. Maintenance costs, however, increase in relative significance with declining road condition.

A comparison has been made of the relative importance of different operating costs components for different vehicle types in good and bad road conditions. In order to keep it manageable the comparison is restricted to three countries - Armenia, Kyrgyzstan and Turkmenistan - where fuel prices are respectively higher than the TRACECA average, in the middle of the TRACECA range and well below the TRACECA range. The comparison covers roads in good condition, denoted by an International Roughness Index (IRI) of 3 metres / kilometre, and bad condition (IRI 12 metres / kilometre). The results of the comparison are set out in Annex 3 Table A.3.4 where the cost of individual components are expressed as a percentage of total vehicle operating costs.

Table 3.2 BASE VEHICLE OPERATING COSTS BY COMPONENT

Vehicle Operating Cost Component	US\$ per 1,000 Vehicle Kilometres					
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck > 3 axle
ARMENIA						
Fuel	28.31	62.31	136.27	96.28	161.79	258.73
Lubricants	3.23	3.23	5.35	5.35	5.35	8.27
Tyres	3.65	4.06	118.48	52.23	125.45	266.98
Crew time	0.00	3.97	7.32	8.55	7.28	15.18
Maintenance labour	0.99	1.02	3.57	3.45	4.35	9.97
Maintenance parts	20.89	18.89	47.79	39.76	122.24	181.63
Depreciation	18.12	11.80	43.02	16.30	52.81	79.35
Interest	14.23	7.64	26.90	14.28	34.08	59.53
Overheads	0.00	10.00	20.00	25.00	25.00	25.00
TOTAL	89.42	122.92	408.70	261.20	538.35	904.64
AZERBAIJAN						
Fuel	28.76	58.02	64.19	40.65	79.27	121.95
Lubricants	3.04	3.04	5.05	5.05	5.05	7.79
Tyres	4.63	4.63	117.47	47.73	161.53	268.38
Crew time	0.00	3.98	10.12	8.71	8.21	16.75
Maintenance labour	1.09	1.14	3.68	3.72	4.69	10.80
Maintenance parts	23.28	22.91	32.59	39.59	105.89	147.78
Depreciation	28.83	18.64	91.91	46.62	93.84	97.07
Interest	22.58	11.81	40.87	20.96	51.86	64.50
Overheads	0.00	10.00	20.00	25.00	25.00	20.00
TOTAL	112.21	134.17	385.88	238.03	535.34	755.02
GEORGIA						
Fuel	22.68	55.54	101.29	60.76	118.76	182.89
Lubricants	3.11	3.11	5.16	5.16	5.16	7.97
Tyres	4.06	6.50	74.81	30.77	82.89	145.04
Crew time	0.00	3.10	7.05	6.06	5.72	8.81
Maintenance labour	0.77	0.83	2.92	2.90	3.46	7.84
Maintenance parts	21.07	33.13	47.80	55.79	114.18	149.68
Depreciation	23.46	25.12	76.54	28.35	77.60	101.03
Interest	20.67	15.80	47.89	22.99	51.45	64.15
Overheads	0.00	10.00	20.00	25.00	25.00	25.00
TOTAL	95.82	153.13	383.46	237.78	484.22	692.41
KAZAKHSTAN						
Fuel	23.61	53.32	92.85	60.77	124.12	172.53
Lubricants	3.04	3.04	5.05	5.05	5.05	7.79
Tyres	4.30	6.50	157.68	49.96	155.93	240.05
Crew time	0.00	22.29	72.40	38.62	52.36	75.61
Maintenance labour	6.10	6.50	22.66	22.60	27.31	60.19
Maintenance parts	27.30	34.14	40.76	58.28	113.90	150.34
Depreciation	25.27	18.81	52.24	18.42	58.13	76.76
Interest	17.07	10.26	27.75	12.31	27.21	42.40
Overheads	0.00	10.00	25.00	25.00	25.00	25.00
TOTAL	106.69	164.86	496.39	291.01	589.01	850.67

Table 3.2 BASE VEHICLE OPERATING COSTS BY COMPONENT

Vehicle Operating Cost Component	US\$ per 1,000 Vehicle Kilometres					
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck > 3 axle
KYRGYZ REPUBLIC						
Fuel	17.73	40.08	97.29	60.14	91.65	158.71
Lubricants	3.46	3.46	5.74	5.74	5.74	8.86
Tyres	4.63	6.90	183.39	71.42	161.76	361.82
Crew time	0.00	9.43	19.24	20.22	16.54	35.55
Maintenance labour	2.51	2.79	9.85	8.42	11.84	27.12
Maintenance parts	21.07	36.54	57.00	42.43	118.40	170.65
Depreciation	25.01	18.46	60.58	36.21	52.71	54.95
Interest	25.53	14.69	42.06	33.60	41.06	51.00
Overheads	0.00	10.00	12.00	22.00	22.00	22.00
TOTAL	99.94	142.35	487.15	300.18	521.70	890.66
TAJIKISTAN						
Fuel	34.27	79.57	185.63	121.56	197.08	335.86
Lubricants	3.46	3.46	5.74	5.74	5.74	8.86
Tyres	4.47	6.50	175.86	96.27	170.13	377.75
Crew time	0.00	14.17	17.22	18.92	23.03	37.12
Maintenance labour	2.30	2.50	8.81	8.00	10.61	23.79
Maintenance parts	23.32	36.40	56.65	47.35	125.85	161.67
Depreciation	24.16	18.12	61.01	27.19	49.61	52.12
Interest	20.69	12.39	34.52	21.08	32.65	42.18
Overheads	0.00	10.00	12.00	22.00	22.00	22.00
TOTAL	112.67	183.11	557.44	368.11	636.70	1061.35
TURKMENISTAN						
Fuel	8.23	20.14	31.84	23.62	37.82	60.96
Lubricants	1.15	1.15	1.91	1.91	1.91	2.95
Tyres	4.87	4.87	118.33	72.39	125.39	295.46
Crew time	0.00	8.22	13.91	16.87	13.84	28.79
Maintenance labour	1.89	2.07	6.98	7.04	8.81	19.41
Maintenance parts	20.89	26.43	46.77	60.52	128.27	154.96
Depreciation	25.89	16.19	72.96	26.26	64.86	79.27
Interest	16.95	9.19	35.75	19.12	29.71	43.89
Overheads	0.00	10.00	22.00	25.00	25.00	25.00
TOTAL	79.87	98.26	350.45	252.73	435.61	710.69
UZBEKISTAN						
Fuel	31.28	73.75	136.46	96.58	162.07	261.27
Lubricants	3.23	3.23	5.35	5.35	5.35	8.27
Tyres	4.47	6.50	118.33	69.56	125.39	268.60
Crew time	0.00	6.41	12.41	14.50	12.34	25.56
Maintenance labour	1.67	1.83	6.15	6.20	7.88	17.22
Maintenance parts	23.88	34.35	45.26	54.47	125.85	153.86
Depreciation	29.59	20.59	70.60	23.49	61.77	77.66
Interest	19.37	11.24	34.59	16.91	28.29	42.99
Overheads	0.00	10.00	20.00	10.00	20.00	20.00
TOTAL	113.49	167.90	449.15	297.06	548.94	875.43

Note: Financial vehicle operating costs

Source: Consultant's estimates

The significance of fuel prices is evident from the wide differences in the relative importance of fuel consumption in total operating costs in the three countries. In Armenia, where automotive fuel prices are at the top end of the range in TRACECA countries, fuel accounts for one third or more of total operating costs on roads in good condition. This drops to 20 - 30 percent of total costs on paved roads in bad condition. In Turkmenistan, on the other hand, fuel consumption only accounts for around 10 percent of total operating costs on good roads and 6 - 8 percent on bad roads.

Tyres are a more significant cost component for heavy vehicles than for light passenger vehicles. Tyre costs actually decline in relative importance with increasing road roughness and declining vehicle speeds. Maintenance parts consumption increases sharply in relative importance as a component of operating costs as road roughness increases. Although maintenance labour increases in the same way, the low wage levels in the TRACECA countries means that this does not have as big an effect on costs as in higher income countries.

3.4

Summary of Base Vehicle Operating Costs By Vehicle Type and Country

The basic vehicle operating costs estimated for the representative vehicle types in the TRACECA countries are summarised in Table 3.3. These base costs are representative costs on paved roads in fair condition with a surface roughness of IRI 5 metres / kilometre.

The range of financial operating costs for each vehicle type over the TRACECA region can be summarised as follows:

• Cars	US\$ 0.08 - 0.11 per kilometre
• Utility vehicles	US\$ 0.10 - 0.18 per kilometre
• Large buses	US\$ 0.35 - 0.50 per kilometre
• axle medium truck	US\$ 0.24 - 0.30 per kilometre
• axle heavy truck	US\$ 0.44 - 0.64 per kilometre
• axle heavy truck with trailer	US\$ 0.09 - 1.06 per kilometre

A significant part of the reason for the differences in operating costs for given categories of vehicles is the variation in automotive fuel prices. These vehicle operating costs are quite low by international standards and the main reason is low vehicle prices, low fuel prices and low maintenance labour and crew costs.

TABLE 3.3: SUMMARY BASE VEHICLE OPERATING COSTS

Vehicle Operating Cost Component	Vehicle Operating Costs (US\$ per Kilometre)					
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle
Armenia	0.09	0.12	0.41	0.26	0.54	0.90
Azerbaijan	0.11	0.13	0.39	0.24	0.54	0.76
Georgia	0.10	0.15	0.38	0.24	0.48	0.69
Kazakhstan	0.11	0.16	0.50	0.29	0.59	0.85
Kyrgyz Republic	0.10	0.14	0.49	0.30	0.52	0.89
Tajikistan	0.11	0.18	0.56	0.37	0.64	1.06
Turkmenistan	0.08	0.10	0.35	0.25	0.44	0.71
Uzbekistan	0.11	0.17	0.45	0.30	0.55	0.88

Note: Financial vehicle operating costs

Source: Consultant's estimates

3.5 The Effect of Road Conditions on Vehicle Operating Costs

3.5.1 Road Condition and Road Surface Roughness

Deterioration in road conditions results in increases in vehicle operating costs. For the road user changes in road condition are mainly reflected in changes in surface roughness or bumpiness. There are several measures of road surface roughness, but the International Roughness Index (IRI) has emerged as the most commonly used international standard measure. The IRI reflects the cumulative vertical movements in a vehicle's rear axle per kilometre and it is expressed in metres per kilometre. Our discussion of the relationship between road condition and vehicle operating costs must involve frequent references to different levels of IRI and it is important to be quite clear about what they mean in qualitative terms.

The range of surface roughness usually considered in highway studies is from IRI 2 m/km to IRI 20 m/km. A roughness level of less than IRI 3 m/km means that the road is in excellent to good condition. For paved roads an IRI of 10 m/km or more denotes a road in bad to very bad condition and anything over IRI 12 m/km would indicate extensive pavement failure or loss of pavement. On unpaved roads roughness levels are generally higher than on paved roads and slightly more relaxed qualitative standards are usually applied. For example, an unpaved road with an IRI of less than 5 m/km would be considered to be in good to quite good condition and very bad condition might be considered to be IRI 15 and over. When surface roughness levels approach IRI 20 m/km it is doubtful if the road retains any engineered properties and for operating purposes can be considered to be a track.

This study is mainly concerned with the inter state and intra state main road networks in the TRACECA countries and the overwhelming majority of these are paved. This section will, therefore, concentrate on roughness levels on paved roads. The following indications of road condition at different roughness levels will be helpful in understanding the subsequent discussion of the relationship between road surface roughness and vehicle operating costs.

Roughness IRI < 3.0 m/km

Vehicle speeds of over 120 km/h are comfortable. No depressions, potholes or corrugations are noticeable. This roughness level would be associated with high quality asphalt and, possibly, very good quality surface treatment. International evidence suggests that concrete pavements rarely achieve roughness levels this low.

Roughness IRI 4.0 - 5.5 m/km

In vehicles travelling at 80 km/h moderately perceptible movements or large undulations may be felt. Defective surface is evident with occasional depressions, patches or potholes or many shallow potholes. In the absence of visible surface defects there may be moderate corrugations or large undulations. Concrete pavements built during the Soviet era were unlikely to have had initial roughness levels below IRI 4 m/km

Roughness IRI 7.0 - 8.0 m/km

At vehicle speeds of 70 - 90 km/h the ride remains reasonably comfortable, but there are strongly perceptible movements and swaying usually associated with defects. These may take the form of frequent, moderate and uneven depressions or patches, and occasionally potholes.

Roughness IRI 9.0 - 10.0 m/km

The ride only remains comfortable at vehicle speeds of 50 - 60 km/h and there can be frequent sharp movements and swaying. These are associated with severe defects taking the form of frequent, deep and uneven depressions, patches and potholes.

Roughness IRI 11.0 - 12.0 m/km

Vehicle speeds generally have to be below 50 km/h because there are many deep depressions and severe disintegration.

In the following discussions of surface roughness and vehicle operating costs the above qualitative categorisation of pavement condition will be simplified as follows:

- IRI 3 m/km or less - good condition
- IRI 5 - 6 m/km - fair condition
- IRI 7 - 9 m/km - moderate to poor condition
- IRI 10 m/km or over - bad to very bad condition

Table 3.4 TOTAL VEHICLE OPERATING COSTS AT DIFFERENT ROAD SURFACE ROUGHNESS LEVELS

Country	Length of main road network (a) (km)	Vehicle-Km on the main road network (million)	Total Vehicle Operating Costs (US\$ million) if average main road condition was:			
			Good (IRI 3 m/km)	Fair (IRI 6 m/km)	Poor (IRI 9 m/km)	Very bad (IRI 12 m/km)
Armenia	3,147.8	1,970.0	309	354	404	461
Azerbaijan	4,689.0	4,496.0	967	1,095	1,236	1,392
Georgia	5,005.3	2,088.4	293	336	387	444
Kazakhstan	17,496.0	10,089.0	2,004	2,360	2,756	3,190
Kyrgyzstan	3,109.9	1,506.1	297	341	390	444
Tajikistan	1,785.2	620.6	147	166	188	212
Turkmenistan	7,682.6	3,545.4	841	972	1,112	1,263
Uzbekistan	21,825.0	10,466.7	2,635	3,009	3,418	3,862
Country	Percentage Increase in Vehicle Operating Costs compared with those on roads in good condition					
	Condition Fair (IRI 6 m/km)	Condition Poor (IRI 9 m/km)	Condition Very bad (IRI 12 m/km)			
Armenia	14.5	31.0	49.4			
Azerbaijan	13.2	27.8	43.9			
Georgia	14.9	32.1	51.5			
Kazakhstan	17.8	37.5	59.2			
Kyrgyzstan	14.7	31.2	49.4			
Tajikistan	13.3	28.2	44.6			
Turkmenistan	15.5	32.2	50.1			
Uzbekistan	14.2	29.7	46.6			
ALL	15.2	32.0	50.4			

Source: Consultant's estimates

3.5.2 The Relationship Between Vehicle Operating Costs and Road Roughness

The World Bank's HDM-III model is a road simulation model and the vehicle operating cost sub model within it simulates the behaviour of vehicles in response to actual and predicted changes in road condition and surface roughness. The slightly simplified vehicle operating cost sub model (VOCM) used for this study presents the relationship between road roughness and vehicle operating costs in the form of the following two alternative formulations:

- $VOC = a + b (IRI) + c (IRI^2)$
- $VOC = \exp[a + b (IRI)]$

where VOC = unit vehicle operating cost per kilometre
 IRI = road surface roughness in metres per kilometre
 a and b are parameters to be solved for each vehicle type

In practice, the first form of the simplified model has been found to give the better statistical relationship in the TRACECA countries and it has been adopted for use in this study.

On the basis of the inputs described earlier, vehicle operating cost estimates have been prepared for each of the six representative vehicle types in each TRACECA country. The detailed results are presented in Annex 3 Table A.3.5. This shows the results from the model for each vehicle type in each country and the unit vehicle operating costs per kilometre at IRI 3 up to IRI 15 m/km. All operating costs are in US dollars.

The results can be summarised quite briefly. For each increase in road surface roughness of IRI 1 m/km unit vehicle operating costs rise by 5 - 7 percent for light vehicles and 2 - 5 percent for heavy vehicles. When allowance is made for the structure of traffic and the mix of vehicle kilometres in the TRACECA countries, each increase of IRI 1 m/km in surface roughness can be shown to result in an increase in total vehicle operating costs of 4 - 5 percent. Translating this into a comparison of vehicle operating costs on roads in good, fair, poor and bad condition, the overall average increase in operating costs compared with a road in good condition are as follows:

- Road in fair condition (IRI 6 m/km) - operating costs 15 percent higher
- Road in poor condition (IRI 9 m/km) - operating costs 32 percent higher
- Road in very bad condition (IRI 12 m/km) - operating costs 50 per cent higher

Total vehicle operating costs in each country have been estimated by multiplying the unit vehicle operating costs for each vehicle type by the total annual vehicle kilometres for the same vehicle types. The vehicle kilometre estimates for each country are described in Chapter 6. Total vehicle operating costs in each country at different roughness levels are shown in detail in Annex 3 Table A.3.6. The results are summarised in Table 3.4. In Kazakhstan, for example, an increase in average main road roughness levels from , say, IRI 5 m/km to IRI 6 m/km would result in an increase in annual vehicle operating costs on main inter urban roads of US\$ 123 million at present traffic levels. This is US\$ 52 million or 75 percent more than the country's total road budget in 1995. Examples from the other countries would show a similar picture.

Road surface roughness levels have been reported to be increasing at around 7 percent a year on the main roads in the TRACECA region and in some countries such as Armenia and Georgia it could be nearer 20 per cent. Assuming an annual rate of increase of 10 per cent in average main road network roughness it would take 7 years for average network condition to deteriorate from good (IRI 3 m/km) to fair (IRI 6 m/km) and a further 4 years for it to deteriorate to poor (IRI 9 m/km). At the much higher rates of deterioration reported in the Caucasus region the same developments would take 4 and 2 years respectively. In Armenia an increase in average main road network roughness from IRI 3 to IRI 6 m/km implies an increase in annual vehicle operating costs of US\$ 45 million at present traffic levels and if roughness progression really is 20 percent a year, this loss would be incurred over only 4 years. A further increase in average roughness from IRI 6 m/km to IRI 9 m/km over two or three years would result in a further increase of US\$ 50 million in vehicle operating costs at present traffic levels.

These operating costs magnitudes obviously have a potentially serious impact on costs elsewhere in the economy. They also provide a clue as to why appropriate road maintenance and rehabilitation designed to arrest road network roughness progression has such a high economic priority. Such maintenance and rehabilitation can be undertaken for costs which are very significantly less than the potential savings in vehicle operating costs which they can bring about. For this reason appropriate road maintenance and rehabilitation programmes have high economic rates of return which is another way of saying that they are of high economic priority.

3.6

Economic Significance of Vehicle Operating Costs

In the TRACECA countries as a group vehicle operating costs on the main inter urban road networks amount to not less than 14 percent of Gross Domestic Product (GDP) or 6 percent of GDP at purchasing power parity. The estimates of GDP are based on data from the World Bank and the European Bank for Reconstruction and Development (EBRD).

There are some variations about this average in the different countries, but only in Azerbaijan is it significantly different. The available data suggest that total inter urban main road vehicle operating costs in Azerbaijan could amount to more than 30 percent of GDP or 10 per cent of GDP at purchasing power parity. This ratio double the TRACECA region average and it seems unlikely to be correct. There are two possible explanations. The first is that the available estimates of Azerbaijan's GDP may be too low. The second is that the data on Azerbaijan traffic on which our estimates of vehicle kilometres and, hence, total vehicle operating costs are based may be significantly overstated. However, the degree of overstatement of traffic volumes would have to be very large indeed to explain such a high ratio of operating costs to GDP, and this to be inherently unlikely. Given the presently available data, an underestimate of GDP seems to be the more plausible explanation.

The ratios of total vehicle operating costs to GDP in the TRACECA countries are high enough for the economic significance of rising, or indeed falling, road roughness levels to be self evident. A comparison of total vehicle operating costs and GDP in each of the TRACECA countries is set out in Annex 3 Table A.3.7. Background economic data are presented in Table A.3.8.

3.7 Potential Significance of Passenger and Goods Delay Costs

The overwhelming importance of vehicle operating costs in road user costs has already been discussed briefly in Chapter 2. The main evidence for this is the work undertaken in the road feasibility studies in Azerbaijan and Kyrgyzstan undertaken respectively by Wilbur Smith and Associates and Carl Bro International a/s. In the Baku - Astara road study in Azerbaijan the consultants estimated vehicle operating costs and passenger delay costs. In Carl Bro International's study of the Bishkek - Osh road in Kyrgyzstan vehicle operating costs and the costs of delays to goods in transit were estimated.

The assessment of passenger delay costs involves the following steps:

- Estimating the average number of passengers per vehicle.
- Estimating the value of time for different categories of passengers which involves obtaining information on passenger occupations.
- Estimating what proportion of passenger time saved could be used productively. This is usually based on information on trip purposes derived from detailed roadside interview surveys of vehicle drivers and passengers.

The valuation of the cost of delays to goods in transit involves valuing the goods making up vehicle loads and the cost of time represented by an interest rate.

The information required for these valuations is very detailed which explains why estimates of the cost of delays to passengers and goods is only attempted in the context of detailed road feasibility studies. Experience from many road feasibility studies in low income countries throughout the world has shown that the economic value of passenger and goods time saved is usually a very small fraction of the value of vehicle operating costs. This is another reason why they are sometimes omitted from studies which are being undertaken under limited budgets and time constraints.

Using the methodology described above, the consultants undertaking the studies in Azerbaijan and Kyrgyzstan estimated the value of delays to passengers and goods in transit as follows:

- **Azerbaijan.** The valuation of passenger time was based on average wage rates and on this basis, and taking account of occupational categories, the time of car and bus passengers was estimated to be equivalent to US\$ 0.51 and 0.35 per hour. However, it was assumed that only 30 percent of car passengers' and 20 percent of bus passengers' trips were for economically productive purposes and the real value of time saved was accordingly reduced to these proportions of the full time value. In effect the real hourly value of passenger time saved was US\$ 0.15 for car passengers and US\$ 0.07 for bus passengers. The average number of passengers per vehicle was assumed to be two for cars and thirty four for large buses. The value of delays to goods in transit was not estimated, presumably because it was assumed to be insignificant.
- In the **Kyrgyzstan** study passenger time values were also based on weekly wage rates and an undifferentiated hourly value of US\$ 0.36 was initially estimated for passengers of all vehicle types. However, only 50 percent of passenger time saved was assumed to be potentially used

productively and the real value of passenger time saved was, therefore, US\$ 0.18. Average vehicle occupancy was assumed to 3.5 passengers per car, 6.5 passengers per utility vehicle and 32 passengers per bus.

- **Kyrgyzstan cargo delay costs.** The basis of the estimate was an assumption from origin-destination survey evidence that 10 percent of trucks were carrying perishable commodities, mainly fruit and vegetables, and 50 percent were carrying non-perishable goods. A representative value of US\$ 200 per tonne was estimated for perishable cargoes, 0.5 percent of the cargo was assumed to be spoiled per day and an hourly interest rate of US\$ 0.013 was calculated. The hourly cargo delay cost was accordingly estimated at US\$ 0.01 per tonne of truck capacity and this translated into the following cargo delay costs by truck type:

-	2 axle truck	US\$ 0.05 per hour
-	3 axle truck	US\$ 0.10 per hour
-	>3 axle truck	US\$ 0.15 per hour

In order to test the significance of passenger and goods time costs compared with vehicle operating costs in Azerbaijan and Kyrgyzstan we have entered assumed time values into the operating cost model for each country and rerun the model. In fact the passenger time value for Azerbaijan was rounded up to a uniform US\$ 0.15 per hour for passengers on all vehicle types. Kyrgyzstan passenger time value was rounded up from US\$ 0.18 per hour to US\$ 0.20 per hour. The value of goods delay costs per hour were as set out above. The respective models for the two countries were then run and the results are summarised in Annex 3 Table A.3.9

In Azerbaijan annual passenger time costs only account for 3.9 per cent of the total of vehicle operating costs and passenger time costs. In Kyrgyzstan the proportion is 5.9 per cent. Cargo delay costs were only valued in the Kyrgyzstan study and they vary insignificant indeed. Compared to annual vehicle operating costs of US\$ 324.1 million and passenger time costs of US\$ 20.3 million, cargo delay costs amounted to only US\$ 679,000 or 0.2 per cent of total road user costs. A number of tests for other TRACECA countries showed the same picture.

In view of the low prevailing income levels and the resulting very low economic time values in the TRACECA states their marginal contribution to road user costs in the inter urban road context hardly justifies the considerable effort required to quantify them. This conclusion would not, however, be necessarily valid in the urban road transport context.

4 ECONOMIC IMPACT OF ROAD MAINTENANCE

4.1 Introduction

The purpose of road maintenance is to make sure that a road does not fail before its design life. Successful road maintenance achieves this by reducing the road's rate of deterioration and, by slowing down the rate of surface roughness progression, it enables road user costs to be lower than they would otherwise have been. The overwhelming importance of road user costs in total road transport costs has already been demonstrated in Chapter 3 and anything which reduces these costs has a significant effect. The economic impact of a reduction in road user costs must, however, be assessed in relation to the costs of achieving it. In this respect, maintenance, which is a relatively low cost activity in comparison, for example, with new road construction, is highly desirable from the economic perspective as well as being good engineering practice. This is reflected in the high economic rates of return to maintenance programmes which are appropriate in scale and timing. In short, road maintenance is one of the most appropriate uses of scarce budgetary resources in the transport sector.

In the past the main problem with road maintenance in many low income countries had nothing to do with engineering or economics, but rather with image. Road maintenance was perceived to be a rather mundane activity with none of the political attractions of higher profile new construction projects. In Africa and Latin America this led to a neglect of road maintenance and a very high economic costs were subsequently incurred. The sharp contraction in highway budgets in the late 1970s and 1980s came about just as the effects of neglected maintenance were becoming highly visible. Attitudes toward highway maintenance have subsequently changed and this reflects both the new budgetary realities and the prompting of international donors such as the World Bank.

In the TRACECA countries highway maintenance has been inadequate in the 1990s and the effects are becoming evident in rising road surface roughness levels. This means that in the more serious cases rehabilitation is needed as well as maintenance. In the most serious cases the situation will have deteriorated to a point where the pavement may have to be completely reconstructed. The progression from routine and periodic maintenance to rehabilitation and reconstruction involves very large increases in the cost of roadworks. Inadequate allocations of funds to road maintenance have been a result of severe contractions in state budgetary resources and this in turn has reflected the economic crisis experienced by most of the TRACECA countries.

4.2 Road Maintenance, Road Condition and Road User Costs

The use of computerised models to simulate pavement behaviour has enabled the effects of different maintenance levels on road condition and road user costs to be predicted with greater precision in recent years. The development of the World Bank's HDM-III model and its use to analyse the economic implications of network deterioration in low income countries in the late 1980s did much to focus attention on the vital importance of appropriate maintenance. It has also been widely used to develop optimum maintenance and rehabilitation strategies for different road conditions with and without budget constraints.

Under the current TRACECA project all 8 recipient states are provided with hardware and software for a computerised data base and a pavement mana-

gement system (PMS). The model used in this PMS to predict pavement deterioration and surface roughness progression is from the latest version of the World Bank's Highway Design and Maintenance Standards model (HDM-IV) which is currently being tested. The model basically takes account of existing pavement condition as measured by roughness (IRI in m/km), pavement age and strength, the incidence of rutting and cracking, cumulative pavement damage from axle loading and environmental factors represented by an environmental coefficient. The specification of the roughness prediction model is as follows:

$$IRI_t = 0.98 * e^{mt} * [RI_0 + 135SNCK_4^{-5} * NE_t] + [0.143 * RDS_t] + [0.0068 * CRX_t] + [0.056 * PAT_t]$$

Where	SNCK ₄	= 1 + SNC - 0.00004 * HS * CRX _t
	RI _t	= roughness at pavement age t, IRI in m/km
	RI ₀	= initial roughness, IRI in m/km
	NE _t	= cumulative equivalent standard axle loads (ESAL) at age t, in million ESA/lane
	t	= pavement age since construction or rehabilitation in years
	m	= environmental coefficient
	SNC	= structural number modified for subgrade strength
	HS	= thickness of bound layers in mm
	CRX _t	= area of indexed cracking (%) at time t
	RDS _t	= standard deviation of rut depth in mm at time t
	PAT _t	= area of patching (%) at time t

The use of this and other pavement models in engineering and economic analysis of road maintenance and rehabilitation is needed to predict the progression of surface roughness with or without some form of treatment, and the reduction of roughness resulting from a treatment. Once the year by year roughness has been predicted, there is a direct link with road user costs via the type of models illustrated in Chapter 3.

The economic analysis of alternative maintenance and rehabilitation options takes the form of a discounted cash flow analysis over a defined period or life cycle. It is customary in this type of analysis to compare one or more defined alternatives with an option representing doing the minimum possible. The latter is sometimes called the "without situation" and the former the "with situation(s)". It is important to realise that over long appraisal or life cycle periods of 10 or more years doing the minimum in the "without situation" is very unlikely to mean doing nothing. Therefore, the occasional references to the "do nothing situation" which are encountered in some analyses are misleading and they should be avoided. The total engineering and road user costs under the two options are compared and the results are expressed in the form of different measures of economic feasibility or project worth. These include the Net Present Value (NPV) which is the sum of the discounted net benefits over the defined appraisal period, the NPV per kilometre, and the Internal Rate of Return (IRR), which is the discount rate at which costs and benefits are equated. The Benefit/Cost Ratio (B/C ratio) is also sometimes used, particularly when establishing priorities under budget constraint. The B/C ratio is the ratio of discounted benefits to discounted costs.

These measures indicate economic priority, although on technical grounds the NPV and B/C ratio are superior to the IRR for this purpose. The general decision rule is that the higher the NPV, B/C ratio and IRR, the higher the economic priority of the proposed expenditure. When choosing between a number of alternative maintenance strategies for a given combination of road condition and traffic, the strategy showing the highest NPV or NPV per kilometre is normally chosen. The IRR is not a particularly reliable measure for ranking alternatives in order of economic priority, but it is widely used, particularly by international do-

nor organisations, because its use avoids the necessity of defining the appropriate discount rate to be used in different countries.

A detailed description of economic project appraisal methodologies is not required in a study such as this. The brief summary given above is designed to provide sufficient background explanation to facilitate understanding of the two illustrative examples of the economic effects of road maintenance which are set out in Tables 4.1 and 4.2.

These two examples are taken from the maintenance strategy analyses undertaken within the pavement management system currently being implemented by the Consultant in the TRACECA countries. In Table 4.1 the economic analysis compares the following alternative strategies for a specified road section:

- Undertake routine maintenance and patching only in a do minimum strategy.
- Provide an initial overlay, undertake routine maintenance and patching, and then provide a subsequent overlay at a defined roughness threshold level.

The table shows how roughness progresses under the alternative scenarios and how this affects the level of road user costs. The net economic benefits in each year are obtained by subtracting total transport costs under Strategy 1 from total transport costs under the minimum maintenance strategy (Strategy 0). The results of the discounted cash flow analysis show that Strategy 1 is economically highly desirable and preferable to the minimum maintenance strategy because the NPV at the indicated discount rates is positive. If the do minimum strategy had been the better one, the NPV would have been negative at the indicated discount rates and the IRR would have been below 10 or 15 percent. The analysis shows that spending US\$ 788,086 more than required by the minimum maintenance alternative results in this instance in an undiscounted saving in total transport costs of US\$ 2.5 million over the appraisal period.

The second example set out in Table 4.2 involves a similar comparison of a minimum maintenance strategy of routine maintenance and patching with a strategy involving deferred rehabilitation in addition to routine maintenance and patching. Roughness under the two alternatives is the same until Year 6 when the deferred rehabilitation takes place and there are, therefore, no saving in road user costs until Year 6. The result of this comparison shows that the strategy of deferred rehabilitation in this situation is of only marginal priority and its economic feasibility is dependent on what is defined as the appropriate discount rate. If the discount rate is only 10 percent, the deferred rehabilitation strategy is acceptable, but if it is 15 percent, the minimum maintenance strategy is preferable.

The analysis of optimum maintenance strategies involves repeating this type of analysis many times for alternative road expenditure options. In the pavement management system being implemented in the TRACECA countries an exhaustive list of options is compared for each road section, and only the 20 options showing the highest economic priority are stored in the computer database for future reference.

Traffic volumes obviously have an important effect on road pavements, but the precise nature of the effect is not always clearly understood. The inclusion of cumulative equivalent standard axles as an important variable in the model set out above gives an idea of the nature of the traffic effect. This is discussed more fully below.

TABLE4-1.XLS

Table 4.1 EXAMPLE OF THE ECONOMIC IMPACT OF MAINTENANCE AND REHABILITATION.

Road section length (km) = 7.00		Traffic Loading		Pavement Roughness (IRI m/km)		Economic Costs (US\$'000)								
Year	Actual	Equivalent Standard Axles (ESALs million)	Cumulative ESALs (million)	Minimum Maintenance -Strategy 0	Required Maintenance -Strategy 1	Minimum Maintenance (Strategy 0)				Required Maintenance (Strategy 1)				Undiscounted Net Cash Flow (A)-(B)
						Routine Maintenance Costs	Other Maintenance Costs	Vehicle Operating Costs	Total Transport Costs (A)	Routine Maintenance Costs	Other Maintenance Costs	Vehicle Operating Costs	Total Transport Costs (B)	
0	1996	0.11	0.11	7.52	3.92	0.70	0.00	277.50	278.20	0.70	382.40	231.54	613.94	-335.74
1	1997	0.12	0.23	7.81	4.06	0.70	0.00	287.17	287.87	0.70	0.00	237.85	238.55	49.32
2	1998	0.12	0.35	8.12	4.21	0.70	0.00	297.43	298.13	0.70	0.00	244.40	245.10	53.03
3	1999	0.12	0.47	8.43	4.36	0.70	0.00	308.21	308.91	0.70	0.00	251.20	251.90	57.01
4	2000	0.12	0.59	7.76	4.52	0.70	0.00	319.56	320.26	0.70	0.00	258.26	258.96	61.30
5	2001	0.13	0.72	9.11	4.68	0.70	0.00	331.52	332.22	0.70	0.00	265.60	266.30	65.92
6	2002	0.13	0.85	9.46	4.86	0.70	0.00	354.24	354.94	0.70	0.00	281.41	282.11	72.83
7	2003	0.14	0.99	10.12	5.04	0.70	0.00	384.24	384.94	0.70	0.00	298.26	298.96	85.98
8	2004	0.14	1.13	10.51	5.24	0.70	0.00	411.23	411.93	0.70	0.00	316.22	316.92	95.01
9	2005	0.15	1.28	10.93	5.45	0.70	0.00	440.50	441.20	0.70	0.00	335.62	336.32	104.88
10	2006	0.16	1.44	11.35	5.67	0.70	0.00	472.20	472.90	0.70	0.00	356.34	357.04	115.86
11	2007	0.17	1.61	11.80	3.92	0.70	0.00	506.64	507.34	0.70	405.70	342.58	748.99	-241.65
12	2008	0.17	1.78	12.84	4.06	0.70	0.00	559.07	559.77	0.70	0.00	362.29	362.99	196.78
13	2009	0.18	1.96	13.33	4.21	0.70	0.00	600.78	601.48	0.70	0.00	383.23	383.93	217.55
14	2010	0.19	2.15	13.85	4.36	0.70	0.00	646.38	647.08	0.70	0.00	405.49	406.19	240.89
15	2011	0.20	2.35	14.40	4.52	0.70	0.00	696.31	697.01	0.70	0.00	429.18	429.88	267.14
16	2012	0.21	2.56	14.97	4.68	0.70	0.00	750.89	751.59	0.70	0.00	454.38	455.08	296.51
17	2013	0.22	2.78	15.58	4.86	0.70	0.00	810.74	811.44	0.70	0.00	481.48	482.18	329.26
18	2014	0.24	3.02	16.22	5.05	0.70	0.00	876.55	877.25	0.70	0.00	510.36	511.06	366.19
19	2015	0.25	3.27	16.92	5.25	0.70	0.00	950.15	950.85	0.70	0.00	541.16	541.86	408.99
Undiscounted Totals						14.00	0.00	10,281.30	10,295.30	14.00	788.10	6,986.84	7,788.25	2,507.06
Net Present Value (NPV) @ 10% discount rate													480.06	
Net Present Value (NPV) @ 15% discount rate													185.70	
Net Present Value (NPV) @ 21.94 % discount rate													0.00	
Internal Rate of Return (IRR %)													21.94	
NPV per Km @ 10% discount rate													68.58	
NPV per Km @ 15% discount rate													26.53	
NPV per Km @ 21.94 % discount rate													0.00	

Source: Consultant's estimates

Table 4.2 EXAMPLE OF THE ECONOMIC IMPACT OF DEFERRED REHABILITATION.

Road section length (km) =		7.00												
Year	Traffic Loading		Pavement Roughness (IRI m/km)		Economic Costs (US\$'000)									Undiscounted Net Cash Flow (A)-(B)
	Equivalent Standard Axles (ESALs million)	Cumulative ESALs (million)	Minimum Maintenance -Strategy 0	Required Maintenance -Strategy 1	Minimum Maintenance (Strategy 0)				Required Maintenance (Strategy 1)					
No.	Actual				Routine Maintenance Costs	Other Maintenance Costs	Vehicle Operating Costs	Total Transport Costs (A)	Routine Maintenance Costs	Other Maintenance Costs	Vehicle Operating Costs	Total Transport Costs (B)		
0	1996	0.11	0.11	7.52	0.40	0.00	158.57	158.97	0.40	0.00	158.57	158.97	0.00	
1	1997	0.12	0.23	7.81	0.40	0.00	164.10	164.50	0.40	0.00	164.10	164.50	0.00	
2	1998	0.12	0.35	8.12	0.40	0.00	169.96	170.36	0.40	0.00	169.96	170.36	0.00	
3	1999	0.12	0.47	8.43	0.40	0.00	176.12	176.52	0.40	0.00	176.12	176.52	0.00	
4	2000	0.12	0.59	7.76	0.40	0.00	182.61	183.01	0.40	0.00	182.61	183.01	0.00	
5	2001	0.13	0.72	9.11	0.40	0.00	189.44	189.84	0.40	0.00	189.44	189.84	0.00	
6	2002	0.13	0.85	9.46	0.40	0.00	202.42	202.82	0.40	800.00	142.44	942.84	-740.02	
7	2003	0.14	0.99	10.12	0.40	0.00	219.57	219.97	0.40	0.00	150.23	150.63	69.33	
8	2004	0.14	1.13	10.51	0.40	0.00	234.99	235.39	0.40	0.00	158.47	158.87	76.52	
9	2005	0.15	1.28	10.93	0.40	0.00	251.71	252.11	0.40	0.00	167.20	167.60	84.52	
10	2006	0.16	1.44	11.35	0.40	0.00	269.83	270.23	0.40	0.00	176.44	176.84	93.39	
11	2007	0.17	1.61	11.80	0.40	0.00	289.51	289.91	0.40	0.00	186.22	186.62	103.29	
12	2008	0.17	1.78	12.84	0.40	0.00	319.47	319.87	0.40	0.00	196.69	197.09	122.78	
13	2009	0.18	1.96	13.33	0.40	0.00	343.30	343.70	0.40	0.00	207.80	208.20	135.51	
14	2010	0.19	2.15	13.85	0.40	0.00	369.36	369.76	0.40	0.00	219.58	219.98	149.78	
15	2011	0.20	2.35	14.40	0.40	0.00	397.89	398.29	0.40	0.00	232.25	232.65	165.64	
16	2012	0.21	2.56	14.97	0.40	0.00	429.08	429.48	0.40	0.00	245.72	246.12	183.36	
17	2013	0.22	2.78	15.58	0.40	0.00	463.28	463.68	0.40	0.00	260.04	260.44	203.24	
18	2014	0.24	3.02	16.22	0.40	0.00	500.89	501.29	0.40	0.00	275.34	275.74	225.55	
19	2015	0.25	3.27	16.92	0.40	0.00	542.95	543.35	0.40	0.00	291.63	292.03	251.32	
Undiscounted Totals					8.00	0.00	5,875.02	5,883.02	8.00	800.00	3,950.83	4,758.83	1,124.19	
Net Present Value (NPV) @ 10% discount rate												73.70		
Net Present Value (NPV) @ 15% discount rate												-33.49		
Net Present Value (NPV) @ 21.94 % discount rate												0.00		
Internal Rate of Return (IRR %)												12.82		
NPV per Km @ 10% discount rate												10.53		
NPV per Km @ 15% discount rate												-4.78		
NPV per Km @ 21.94 % discount rate												0.00		

Source: Consultant's estimates

4.3 The Effect of Axle Loads on Road Pavements

Heavy vehicle traffic is an important contributor to the deterioration of road pavements. This contribution to pavement damage over time is sometimes mistakenly attributed to gross vehicle weight, but this is only true under special circumstances. In general, the damage caused to road pavements by vehicles is a function of a complex combination of factors of which the weight on the vehicle axles is the best known and most easily measured. Damage to bridges and other road structures on the other hand is a function of gross vehicle weight, but it is damage to pavements which is the main item of interest in the context of this study.

The effects on pavements considered in this section concentrate on structural damage, which is the most important factor influencing effective pavement life. Other forms of damage, such as those to wearing courses, are not discussed further because they can be attributed to all types of vehicles.

The axle load has traditionally been treated as the sole damage factor since the research undertaken in the 1950s by the American Association of State Highway Officials (AASHTO). However international research undertaken over the last 20 years has demonstrated that the picture is more complex and that the following factors are also important:

- the type of axle, including the number of wheels and the type of tyres,
- the axle grouping - single, tandem and triple (tridem),
- The surface contact pressure of the tyres and
- the vehicle suspension system.

The precise effect and relative importance of these also varies according to whether the damaging potential being considered is to flexible or rigid pavements. The main problem with utilising the results of the more recent research is that it is extremely difficult in practice to obtain adequate data on all the above variables for each vehicle using a road. For this reason, the traditional AASHTO based research evidence continues to be used.

According to the AASHTO research the damage to flexible pavements from the passage of a single vehicle axle could be described by the following expression using the so-called "fourth power law":

- Equivalence Factor = $[(\text{Axle weight}) / \text{Reference axle weight}]^4$
 Where

Equivalence factor	= pavement damage factor
Axle weight	= the weight of a single axle in tonnes
Reference axle weight	= a single axle weight of 8.16 tonnes

Occasionally a reference axle of 10 tonnes is also used. The exponent used is commonly in the range 4.0 - 4.3. In more sophisticated formulations different exponents are sometimes used to express the potential damage to different layers in flexible pavements. In the case of semi rigid or rigid pavements the exponent used can be between 8 and 12. The "fourth power law" suggests that the damage to flexible pavements increases extremely rapidly with single axle loads above the reference axle weight.

The damage to flexible pavements caused by a given load on tandem axles is less than the damage caused by the same load on two single axles. Similarly,

the damage caused by a load on a tridem (triple) axles is even less than the equivalent load carried on three single axles. The AASHTO research and the more recent research carried out in a number of member countries of the Organisation for Economic Co-operation and Development (OECD) indicate that the damage to flexible pavements attributable to tandem axles is just over 60 percent of the damage caused by the same load on two single axles. In the case of tridem axles the equivalent damage is 45 percent of the damage which would be caused by the same load on three single axles. The national axle loading regulations in various OECD countries take these damage ratios into account. These ratios embody a high, if necessary, degree of simplification because the damaging effect is also a function of the way the load is distributed over the axles and whether single or double tyres are used. In most of the discussion in this section twin wheeled axles are assumed. The difference in damaging power between single, tandem and tridem axles also grows rapidly with rising load weight. This is the obvious reason why only the heavier trucks have tandem or tridem axles.

The grouping and type of tyres also influences potential damage to pavements. For example, wide base tyres do about 92 percent of the damage of normal single tyres and twin tyres only do around 77 percent of single tyre damage. Finally, there are also differences in the pavement damaging potential of different types of vehicle suspension systems. Modern suspension systems are thought to have only 95 percent of the pavement damaging potential of traditional suspension systems.

The simplified methodology for calculating the potential pavement damaging impact of different axle grouping and characteristics shown below provides a very useful basis for assessing the impact of different types of vehicles. In practice, conventional axle load surveys are seldom able to provide the amount of information required for this level of pavement damage evaluation. It is important nevertheless to have a clear idea of the pavement damage potential of different types of heavy vehicle because it has an important bearing on road user charges for heavy vehicles and on national axle loading regulations.

The total pavement damaging power of different types of heavy vehicle can be summarised in the following simplified model:

$$PD = [(AL_1/AL_0) * k_1 * k_2 * k_3]^a$$

where	AL_1	= load on the axle or axle grouping
	AL_0	= the reference axle load
	k_1 (type of grouping)	single axle = 1.0 tandem axle = 0.6 tridem axle = 0.45
	k_2 (type of tyres)	twin tyres = 1.0 wide base tyres = 1.2 single tyres = 1.3
	k_3 (type of suspension)	traditional = 1.0 improved = 0.95
	a is the exponent	

Based on the use of this model, the OECD in its report "The Impacts of Heavy Freight Vehicles" evaluated the pavement damaging potential of different types of trucks and the findings are discussed briefly below.

4.4 The Effects of Different Types of Trucks on Pavements

Any reasonably rigorous assessment of the pavement damage attributable to different types of heavy goods vehicles has to take payload into account. While it is interesting to know the absolute pavement damage factors for different vehicle types, it is even more interesting to have information on these damage factors in relation to payload tonnes. Assuming that a given annual tonnage has to be transported over a road network, it is important from a vehicle licencing perspective to know what types of heavy goods vehicles would transport that tonnage at minimum damage to the pavements. With this knowledge it should be possible to use the vehicle licencing system to encourage vehicles with axle configurations which do least pavement damage in relation to load capacity.

The results of analyses carried by the OECD are summarised in Table 4.3. These show that gross vehicle weight is not necessarily a very good guide to the pavement, as opposed to bridge, damaging potential. The damage factors for different types of goods vehicles with different axle configurations is a much better guide, but the most valid basis for considering pavement damaging potential by heavy goods vehicles is in relation to payload capacity. The estimated damage factors per payload tonne of capacity show that large articulated trucks are usually less harmful to pavements than smaller rigid single axle trucks. The results in the table assume correct loading and the greater pavement damaging potential of 2 axle rigid trucks increases when overloading is taken into account. These results reflect the respective damaging potential of single, tandem and tridem axles discussed earlier.

None of the systems of heavy goods vehicle licencing encountered in the TRACECA countries appears to take these factors into account. In the longer term considerable gains in economic efficiency would result from reforming the structure of heavy vehicle licences to take pavement damage factors per tonne of payload capacity into account.

4.5 Vehicles and Pavement Damage in the TRACECA Countries

Axle load surveys had been undertaken by the Consultant in Armenia, Azerbaijan, Georgia, Kazakhstan, Kyrgyzstan, Turkmenistan and Uzbekistan. The results of these surveys show that most heavy goods vehicles manufactured in the C.I.S are smaller and have lighter axle loads than the equivalent non - C.I.S vehicles traversing the TRACECA road networks. The overall level of axle loading is very low by international standards, but it can be expected to increase in line with international experience in the medium to long term. The contribution of vehicle axle loading to pavement damage in the TRACECA countries has been much smaller than it would have been if international vehicle damage factors and incidence of vehicle overloading had been experienced.

The overall results of the axle loading surveys in six TRACECA countries are set out in Annex 4 Tables A.4.1 and A.4.2. The overall pavement damage factors for heavy goods vehicles in Table A.4.2 are low, but they still overstate the pavement damaging potential of the different vehicle types because they are estimated on a single axle basis. In other words, no reduction is made for vehicles with tandem or tridem axles because this information was not recorded. It should also be noted that the large samples of heavy vehicles weighed at each location included empty vehicles and vehicles with low load factors. The samples were, therefore, representative of the heavy vehicle flows. The average damage factors using an exponent of four from all the surveys were as follows:

Large Buses	All = 1.50	
2 axle trucks	All = 0.11	non-C.I.S = 4.87
3 axle trucks	All = 0.24	non-C.I.S = 1.27
4 axle trucks	All = 0.83	non-C.I.S = 1.92
5 axle trucks	All = 0.45	non-C.I.S = 1.31

The corresponding damage factors using a 10 tonne reference axle are lower.

Estimates of damage factors per payload tonne have also been estimated in Annex 4 Table A.4.4 assuming payload to be around 60 percent of gross vehicle weight, an 8.16 tonne reference axle and an exponent of 4. The resulting damage factors per payload tonne are summarised below:

2 axle trucks	All	= 0.02 per payload tonne
	Non C.I.S	= 0.67 per payload tonne
3 axle trucks	All	= 0.03 per payload tonne
	Non C.I.S	= 0.11 per payload tonne
4 axle trucks	All	= 0.06 per payload tonne
	Non C.I.S	= 0.12 per payload tonne
5 axle trucks	All	= 0.03 per payload tonne
	Non C.I.S	= 0.08 per payload tonne

It should be remembered that these are overestimated to the extent that no adjustment to damage factors has been made for tandem and tridem axles. The damage factors per payload tonne are clearly significantly higher for non C.I.S vehicles than for C.I.S vehicles and this reflects higher load factors as might be expected from commercial operators of the more expensive international trucks. The relationship between the damage factors and damage factors per payload tonne between non C.I.S two axle trucks and multi axle trucks is similar to the OECD examples. The two axle truck fleets of C.I.S manufacture are dominated by trucks which are small by international standards and their damage factors and damage factors per payload tonne are very low both in comparison with international 2 axle trucks and in relation to multi axle trucks of C.I.S manufacture.

A revival of economic activity in the TRACECA countries could be expected to be accompanied by a significant increase in trucking activity and growing load factors. A greater use of larger articulated trucks of non C.I.S origin can also be expected. In the medium to long term it can be expected that damage factors for heavy goods vehicles in the TRACECA countries will move into line with internationally accepted norms and the implications of this for pavement maintenance and rehabilitation need to be recognised.

It will have been noticed that no mention has been made of passenger cars and other light vehicles in the above discussion. The reason for this is that they make very little contribution to pavement damage. The pavement damage factor for a typical passenger car of around 1.6 tonnes is only about 0.0001 and for a small pickup or minibus it might be of the order of 0.0015 to 0.002. A car, therefore causes only one thousandth of the pavement damage of an average 2 axle truck of C.I.S manufacture. For light utility vehicles the proportion is 1 - 2 percent. Even allowing for the much greater number of light vehicles on the roads, the total pavement damage attributable to them is negligible.

Table 4.3 PAVEMENT DAMAGING POTENTIAL OF DIFFERENT TYPES OF CORRECTLY LOADED TRUCK

Truck Type	Axle Configuration	No. of Axles	Gross Vehicle Weight (tonnes)	Payload (tonnes)	Pavement Damage Factors		
					Per Vehicle	Per GVW tonne	Per Payload tonne
Rigid 2 axle	S-S	2	14	9	1.35	0.10	0.15
Rigid 3 axle	S-T	3	22	14	1.22	0.06	0.09
Rigid 2 axle truck + 2 axle drawbar trailer	S-S / S-S	4	37	24	3.36	0.09	0.14
Rigid 2 axle truck + 3 axle drawbar trailer	S-S / S-T	5	45	29	3.22	0.07	0.11
Rigid 3 axle truck + 3 axle drawbar trailer	S-T / S-T	6	54	34	3.06	0.06	0.09
Articulated 2 axle tractor + 2 axle semi trailer	S-S / T	4	34	21	2.23	0.07	0.11
Articulated 3 axle tractor + 2 axle semi trailer	S-T / T	5	42	26	2.08	0.05	0.08
Articulated 3 axle tractor + 3 axle semi trailer	S-T / TR	6	50	31	2.17	0.04	0.07

Note: The estimated damage factors take account of the reduced pavement damaging effect of tandem and triple axles.

S = single axle T = tandem axle TR = triple (tridem) axle

Source: Organisation for Economic Co-operation and Development (OECD) - "Impacts of Heavy Freight Vehicles"

5 **THE FINANCING OF ROADWORKS**

5.1 **General**

The financing of roadworks in most of the TRACECA states is nominally through a road fund set up by government. In Armenia, however, there is no road fund and financing of roads from the general government budget. In practice, the lack of financial independence of most of the road funds means that financing of roadworks operates in much the same way as if it were from the general government budget.

The main direct charges on road users are in the form of taxes on automotive fuels, vehicle licences and registration taxes, transit taxes on foreign (non-C.I.S) vehicles and taxes on vehicle acquisition. Nearly all these charges are at levels which are very low by international standards. Other taxes used for financing roadworks include turnover and - or profits taxes on enterprises linked functionally or locationally with the highway networks. In the economic climate experienced by most TRACECA states in recent years profits taxes are unlikely to have been a major contributor to highway budgets. In most cases these taxes and charges are at levels which are very low by international standards. In part this reflects a traditional philosophy of road financing inherited from the past, and it is also the result of a failure to make adequate adjustments in taxes and charges to take account of inflation. The overall effect has been a declining real financial contribution from road user charges to the road sectors. This has been accompanied by an irresistible downward pressure on general government budgets as a result of the economic depression of the 1990s.

5.2 **Road Funds**

5.2.1 **Introduction**

Road funds have been established in most of the TRACECA states since 1991. None of them can be said to possess the degree of financial and operational independence which the World Bank, for example, regards as critical to their success. In practice, most of the TRACECA road funds appear to operate as an extension of the central government's tax collection machinery. They have little effective control over how much of the money which they collect from the road sector is used in the road sector. A possible exception to this could be Uzbekistan where it is claimed that lessons learned from the problems of other road funds have been incorporated in the design of its own fund. The following sections briefly summarise the main features of road funds in individual TRACECA countries.

5.2.2 **Azerbaijan**

The Road Fund Law setting up Azerbaijan's road fund was passed in November 1994, but the fund effectively started operations in mid 1994. Before the establishment of the road fund the financing of roadworks was from the State Budget. The fund is supposed to collect revenue from road user charges and highway related taxes and to pass this revenue on to the Ministry of Finance. These charges include an automotive fuel sales tax, a road use tax on enterprises, a vehicle sales tax, vehicle ownership taxes and a transit tax on non - C.I.S

foreign vehicles. The potential revenue from this transit tax is significantly reduced by the fact that Iranian vehicles, which constitute the majority of foreign vehicles, are exempted from paying it.

Fifteen percent of the revenue from the fuel tax is supposed to be passed onto the fund by the State Fuel Committee, but this has not happened so far. The Ministry of Finance decides the annual budget to be allocated to Azeravtoyol, the state highway organisation, so highway financing is still effectively from the State Budget.

In the second half of 1994 the road fund collected the equivalent of US\$ 10 million. This increased to US\$ 27.9 million in 1995. The road fund's estimated revenue collection for 1996 is equivalent to US 79.8 million, but as of August 1996 the predicted budget allocation for roadworks by the Ministry of Finance was no more than US\$ 10.4 million of which approximately 80 percent was for state highways.

5.2.3 Georgia

The law establishing Georgia's road fund was passed in September 1995. The law sets out the basis of the fund, its main purpose, the provision of financial resources for it and the use of those resources. The main charges and taxes contributing to the fund's revenues include a sales tax on automotive fuel, a road use tax on enterprises, taxes on vehicle ownership, a tax on the location of public utility facilities within road rights of way, contributions from lotteries and traffic fines, and a transit tax on foreign vehicles entering Georgia and on Georgian vehicles carrying foreign export cargoes.

In the first seven months of 1996 the proceeds from road user charges and taxes amounted to the equivalent of US\$ 9.46 million. Of this, just over 40 percent came from transit taxes on foreign vehicles, 29 percent from road use taxes on enterprises, 25 percent from vehicle ownership taxes and only 4.1 percent from taxes on fuel. Indications from the first half of 1996 are that expenditure on roadworks was running at around 60 percent of the total proceeds from the fund.

5.2.4 Kazakhstan

Up to 1992 expenditure on roads in Kazakhstan was financed from the National Budget. In December 1991 two categories of road funds were established by government decree, the National Road Fund for national road maintenance and development and the Regional (Oblast) Road Funds for local road maintenance and development. Road fund revenue was originally designed to come from the proceeds of a road use tax on enterprises, a purchase tax on vehicles, a vehicle ownership tax based on vehicle horse power, a tax on petroleum products and vehicle tyres, a tax on the income of transport companies and a transit tax on foreign vehicles entering Kazakhstan.

The structure of road use taxes and user charges was modified in 1994, but the new arrangements were rescinded in the second half of 1995. As of mid 1996 a number of road funding arrangements were under consideration by the Government. In general, Kazakhstan's experience with operating a road fund has not been satisfactory.

Road fund revenue dropped from the equivalent of US\$ 185 million in 1993 to US\$ 92 million and US\$ 100 million respectively in 1994 and 1995. The latest available information on the main sources of road fund revenue only relate to 1993 when road use taxes accounted for 47 percent and taxes on fuel and vehicle tyres contributed a further 36 percent of the total. In 1993 road fund revenue and expenditure on roads were almost in balance. Since then, however, expenditure on roads has been only 50 percent of road fund revenue in 1994 and 70 percent in 1995. The balance has presumably gone into the Government's general tax revenues.

5.2.5 Kyrgyzstan

The establishment of a road fund has been under consideration for the past two years, but as of May 1996 the necessary legislation had not been passed.

5.2.6 Tadjikistan

Tadjikistan has a road fund responsible for collecting road user charge revenue, but details on the operation of the fund are not available.

5.2.7 Turkmenistan

Turkmenistan's road fund was only established in 1995 and it became operational at the beginning of 1996. Its objectives were the financing of requirements for the maintenance, rehabilitation and development of State roads. The fund's financial resources were originally intended to come from the excise duty on automotive fuels, transit charges on foreign vehicles and the annual vehicle registration tax. Subsequently, the abolition of special government departmental or agency accounts meant that the road fund could not be operated as a financially independent entity. A further blow to the fund's resources was the removal of the proceeds of the excise tax on automotive fuels from its control. The fund's managing authority is Turkmenautellari.

The estimated financial resources of the fund in 1996 are the equivalent of US\$ 17 million to US\$ 20 million depending on whether official or commercial exchange rates are used. This represents a significant increase on the US\$ 7 million made available for roads out of the state budget for in 1995.

5.2.8 Uzbekistan

Uzbekistan originally established a road fund in 1993. It has been mainly financed out of taxes on enterprises and institutions at the state, oblast (regional) and rayon (district) level, taxes on vehicle ownership and transit taxes on foreign vehicles entering the country. The fund is responsible for financing all road-works, but its resources do not include a tax on automotive fuel. The only part of the country levying a tax on fuel is the Semi Autonomous Republic of Karakalpakistan where a 7 percent fuel tax is in force. The road fund is administered by Uzavtoyul, the state highway organisation.

The amount of fund revenue raised at just over the equivalent of US\$ 100 million may be insufficient, but Uzbekistan appears to be one of the few TRACECA

countries with a road fund where a significant part of fund revenue is not appropriated by the finance ministry for non - road uses.

5.3 Road User Charges and Road Related Taxes

5.3.1 General

In the following sections the details of road user charges and road related taxes in individual TRACECA countries are briefly summarised. The information on these charges was collected during visits to the various countries in the course of the Project.

5.3.2 Armenia

Armenia is in the process of introducing a new road tax and draft legislation was supposed to have been presented to Parliament in September 1996. The present structure of charges and taxes is similar to those in force in most of the other TRACECA countries and the most distinguishing feature of the new Armenian proposals will be the much greater reliance to be placed on the proceeds from a fuel tax.

The main features of the proposed new road tax are as follows:

- The 2 percent tax on the revenues of enterprises involved in vehicle operation and the 0.43 percent tax on the incomes of all other enterprises will be replaced by a fuel levy.
- The levy or tax on petrol and diesel will be at the rate of 12 percent.

The Ministry of Finance estimates that the new fuel tax will raise just over the equivalent of US\$ 7 million in a full year and the stated intention is that this will be specifically assigned to road expenditure. This would be an advance on the road budgets of US\$ 1.65 million in 1994 and US\$ 4.15 million in 1995. It should be noted, however, that only one third of the 1995 road budget allocation had been paid out as of June 1996. The predicted 1996 fuel tax yield will also be required to cover a local counterpart contribution of around US\$ 864,000 to an International Development Association (IDA) credit.

5.3.3 Azerbaijan

The existing road taxes and road user charges comprise the following:

- A 0.5 percent tax on the turnover of road vehicle operating companies and a 0.3 percent tax on the turnover of trading companies and certain other types of company.
- A 2 percent vehicle sales tax.
- A vehicle ownership tax levied on the basis of a complicated formula involving the multiplication of a percentage of the minimum wage rate by

vehicle horse power. For private cars the relevant percentage is 2 and for other vehicles it is 5.

- International transit tax on foreign vehicles entering the country, but specifically exempted from this tax are Iranian vehicles which make up the largest group of foreign (non C.I.S) vehicles. The following transit tax rates have been in force in 1996:

- **Cars** - US\$ 15 per entry
- **Buses** - from US\$ 30 per entry for buses of 12 passenger capacity to US\$ 100 for buses with a capacity of more than 30 passengers.
- **Trucks** attract a transit tax of from US\$ 100 (less than 10 tonnes) to US\$ 180 for trucks of more than 24 tonnes. It is not clear whether the truck tonnage refers to payload capacity or gross vehicle weight. There are additional weight related transit charges based on truck weight. These range from US\$ 0.15 per kilometre for trucks weighing 37 - 41 tonnes to US\$ 1.8 per kilometre for trucks weighing more than 81 tonnes.

In the absence of vehicle weighing equipment at each border post it is not clear how the truck weight assessments for transit tax purposes is made or how the relevant number of kilometres for charging is calculated. In addition to transit charges on vehicles, there are transit charges on vehicle loads. These range from US\$ 100 per load for a "not very dangerous" load to US\$ 400 per load for a "very dangerous" load.

- A petrol sales tax of from US\$ 3.07 - 3.74 per tonne, depending on octane level, and a tax on automotive diesel of US\$ 2.20 per tonne. There is also a retail sales tax on automotive fuels of 15 percent.

Azerbaijan has a system of complex road taxes and user charges, but in the absence of information on the relative contribution of the different charges to total road fund revenue it is difficult to judge their effectiveness as a source of revenue. What is beyond dispute is that total revenue raised from road users is insufficient and the proportion passed on as road budgets is even more inadequate.

5.3.4 Georgia

A tax for the use of public roads is levied on the profits and - or turnover of specified enterprises. There is a 2 percent profits tax on enterprises operating passenger transport services. Municipal buses are exempt. The profit tax rate is 0.5 percent for banking organisations and 0.1 percent for other business organisations. Trading enterprises must also pay a 0.1 per cent tax on their turnover. Enterprises located within 50 metres of a public road in densely settled areas and within 100 metres in less densely populated areas have to pay double the above tax rates. Organisations selling automotive fuels also have to pay a fuel tax, and their liability to pay profit taxes is reduced in line with their liability to pay the fuel tax. The fuel tax is in the form of a value added tax of 5 percent.

There is a vehicle ownership tax based on engine capacity. The rates for different vehicle types is as follows:

Cars- US\$ 0.20 per horse power

Buses-from US\$ 0.50 per horse power for vehicles with less than 13 seats to US\$ 2.00 per horse power for vehicles with more than 30 seats.

Trucks from US\$ 1.00 per horse power for vehicles of less than 11 tonnes to US\$ 3.00 per horse power for vehicles of more than 40 tonnes.

The annual registration - ownership tax has to be paid before the annual safety check and when a vehicle is re-registered on change of ownership.

A transit tax is levied on foreign vehicles entering Georgia and on owners of Georgian vehicles loaded with foreign cargoes for re-export abroad. The transit tax rates levied on entry into Georgia are as follows:

Cars	US\$ 20.00
Buses (less than 13 seats)	US\$ 40.00
Buses (13 - 29 seats)	US\$ 80.00
Buses (30 or more seats)	US\$ 130.00
Trucks (less than 11 tonne payload capacity)	US\$ 130.00
Trucks (11 - 20 tonne payload capacity)	US\$ 160.00
Trucks (21 - 39 tonne payload capacity)	US\$ 220.00
Trucks (40 or more tonnes payload capacity)	US\$ 300.00

Payment of this tax can be made in US dollars or in other currencies.

Finally, there are taxes on public utility facilities located within State road right of way and on roadside advertising hoardings. The utility tax is levied at the rate of the equivalent of US\$ 0.10 per linear metre of facility within the right of way. The tax rate on roadside advertising hoardings ranges from the equivalent of US\$ 20 per square metre of hoarding on national roads to US\$ 15 per square metre on intra state (republican) roads and US\$ 5 per square metre on local roads.

The State Tax Office is responsible for raising these taxes and road user charges and for the accounting and financial contrive of the road fund.

5.3.5 Kazakhstan

Under the 1994 restructuring of road financing the main road taxes and user charges were as follows:

- Special road tax of 1.0 percent of turnover levied on all enterprises. The proceeds were split in the proportions 30 per cent for national roads and 70 percent for Oblast funds.
- A tax of 1.0 percent on vehicle purchases with the proceeds going to Oblast funds.
- An annual transport tax linked to vehicle size.
- A value added tax on fuel, lubricants and tyres the proceeds being destined for the Oblasts.
- A levy of 2.0 per cent on transporters' turnover with the revenue going to national roads.

As mentioned earlier, these arrangements were rescinded during the second half of 1995 and alternative financing arrangements are still being considered by the Government.

5.3.6 Kyrgyzstan

In recent years road related taxes and road user charges have comprised the following:

- an annual road tax of 0.8 percent of turnover levied on most enterprises. Trading companies and privatised or small scale agricultural enterprises pay at the rate of 0.08 per cent of turnover.
- a levy of 2 percent on the turnover of all transport companies, which has now become a voluntary contribution
- an excise tax on petrol of the equivalent of US\$ 4.1 per tonne. A similar tax on diesel was abolished in 1995
- a vehicle registration tax of 5 percent of the vehicle's value on transfer of ownership
- an annual vehicle licence tax of approximately US\$ 0.90 per horse power of engine capacity for trucks and US\$ 0.02 per horsepower on cars
- A 10 percent import levy on imported cars from outside the C.I.S.

Revenue from these sources goes into the Government's central budget and it is not specifically allocated to the Ministry of Transport for expenditure on roads.

A draft of a Republican Road Fund Law was prepared by the Ministry of Transport as part of the Automobile Road Act which has been under consideration by the Ministry of Finance since early 1995. The objective of this would be to establish a dedicated road fund which would legally tie specified sources of revenue to expenditure on roads. Under the draft proposals there would be 13 different sources of revenue, either existing or newly proposed. Proposed new charges and taxes would include the following:

- a value added tax on fuels and tyres
- licencing fees for transport activities
- duties on heavy axles and large vehicles
- toll fees for selected roads and tunnels
- a transit tax on foreign vehicles entering Kyrgyzstan

As of May 1996 the Ministry of Transport was attempting to add supplementary proposals focusing on existing taxes and charges. Revenue from taxes paid by vehicle owners amounted to around US\$ 5.4 million in 1994. Revenue from automotive fuel taxes might have contributed a further US\$ 0.8 million. These revenues are clearly inadequate in relation to expenditure requirements, but total

Government revenue in 1994 only amounted to the equivalent of US\$ 181.8 million.

5.3.7 Turkmenistan

The main road user charges in force in Turkmenistan include transport licence fees, taxes for vehicle inspection, vehicle registration fees, fuel tax, import duties on vehicles and transit fees for international (non - C.I.S) vehicles. The main features of current charges and taxes are as follows:

- **Road transport licence fees.** These have been applicable to international road transport enterprises since May 1996. Before then they were also applied to domestic transport enterprises, but at a much lower rate. Foreign freight carriers now pay monthly fees at the following rates per vehicle:
 - Trucks with a carrying capacity of less than 10 tonnes US\$ 20
 - Trucks with carrying capacity of 10 - 20 tonnes US\$ 50
 - Truck with carrying capacity of more than 20 tonnes US\$ 100
- **Annual vehicle inspection fees** are collected by the Police Department of the Ministry of the Interior. The fee for Turkmen vehicle owners is the equivalent of US\$ 0.12 per vehicle and for foreign owners the fee is US\$ 4.00 per vehicle. It is not immediately apparent why inspection of foreign owned vehicles should be thirty three times more expensive than for domestic vehicle owners.
- **Vehicle registration fees** in the form of fees for vehicle licence plates are the equivalent of US\$ 7.50 for Turkmen and US\$ 100.00 for foreign owners.
- **Duties on passenger vehicles imported** from outside the C.I.S and Iran are levied at the rate of 10 percent of the vehicle's declared import value which cannot be less than US\$ 1,000. There are also additional Customs charges of 0.2 percent to cover the administrative paperwork.
- **Transit charges on international vehicles** entering Turkmenistan are as follows:
 - Trucks of less than 10 tonnes carrying capacity US\$ 50
 - Trucks of 10 to 20 tonne carrying capacity US\$ 100
 - Trucks of more than 20 tonnes carrying capacity US\$ 150

Passenger vehicles attract the following transit charges:

Cars	US\$ 30
Buses with less than 20 seats	US\$ 25
Buses with 13 to 30 seats	US\$ 50
Buses with more than 30 seats	US\$ 100

In 1995 vehicles from the C.I.S countries (except Azerbaijan, Georgia and Ukraine) and from Afghanistan, Iran and Turkey were exempt and if this is still the case, the potential revenue yield from this charge seems rather limited.

- **Excise tax on motor fuels** are at the rate of 55 percent and 60 per cent of the respective ex refinery prices of petrol and diesel. In October 1996 these were the equivalent of US\$ 0.047 - 0.052 per litre for petrol and 0.038 per litre for diesel. Even allowing for distribution costs, the economic opportunity cost of Turkmen refined automotive fuels is probably nearer US\$ 0.30 per litre. The above percentage rates seem to be quite high, but the ex refinery prices on which the tax is based are so extraordinarily low by international standards that this results in a very low duty in practice.
- **Annual tax on road vehicles.** This is based on a specified multiple of the minimum wage and in US dollar equivalent terms the tax rates are approximately as follows:

Cars	US\$ 10
Buses (depending on seating capacity)	US\$ 40 - 100
Rigid trucks (depending on capacity)	US\$ 100 - 1,000
Road tractors (depending on horse power)	US\$ 150 - 400
Semi trailer (depending on load capacity)	US\$ 50 - 250

Until the beginning of 1996 revenues from some of the above taxes went into special Ministry of Road Transport accounts at the Bank of Turkmenistan. However, all special accounts were abolished in January 1996 and these revenues now go into the State Budget. Revenues from vehicle inspection are allocated to the special Road Traffic Safety Fund which comes under the jurisdiction of the Ministry of the Interior. Revenues from transit charges are supposed to be directly allocated to the Road Fund administered by Turkmenautoellari, but there is some doubt as to whether the full hard currency receipts are being transferred to the fund.

5.3.8 Uzbekistan

Uzbekistan has the traditional mix of road taxes on enterprises, taxes on vehicle purchase and ownership and a transit tax on foreign vehicles. Except in Karakalpakistan there is no automotive fuel tax.

The profits tax on enterprises operating road vehicles is levied at the rate of 2.0 percent. The purchases tax on vehicles is at 5.0 percent for cars and 10 per cent for buses and trucks. The transit tax on foreign (non-C.I.S) vehicles entering the country has been fixed at US\$ 150.0, but this figure appears to have been arrived at arbitrarily and not based on rigorous analysis.

5.4 Road Budgets and Expenditure on Roads

The traumatic economic conditions experienced by most of the TRACECA countries since 1991 have been reflected in severely constrained government budgets and sharply reduced levels of expenditure on roads. Consequently, expenditure levels on roads appear to be low both by historical standards and by the standards of other countries of similar income levels.

The available evidence on expenditure on roads, total central government expenditure and Gross Domestic Product which is set out in Table 5.1 has to be treated with considerable caution because of the uncertain quality of the data, but it does indicate a fairly consistent pattern. All the countries except Turkme-

nistan and Uzbekistan are spending significantly less per kilometre on their state road networks than was being spent in the mid 1980s. In Azerbaijan, Kazakhstan, Kyrgyzstan and Tadjikistan the prevailing levels of expenditure on state roads are less than half of the levels between 1983 and 1985. In Armenia it is just over half.

Expenditure on roads appears to lie within the range 0.2 - 1.9 per cent of total central government expenditure in 1995/1996. In Tadjikistan, however, it appears to be only 0.2 per cent. For the TRACECA countries, excluding Tadjikistan, expenditure on roads is 0.16 - 0.35 per cent of Gross Domestic Product. Once again, Tadjikistan is well below the range at only 0.05 per cent of GDP.

Historical and international comparisons are only interesting up to a point. The main interest in any analysis of expenditure levels on roads is how they compare with required expenditure levels. This is the subject of the next chapter.

Table 5.1 TRACECA COUNTRIES - EXPENDITURE ON ROADS 1983/85 - 1995/96

Country	Period	State Road Network Length			Average Annual Budget / Expenditure on Roads				Expenditure on roads as % of:	
		Inter State (km)	Intra-State (Republic) (km)	Total	Total (US\$ million)	Per Km of:			central government expenditure (1995-96)	GDP (1995)
						Inter State roads (a) (US\$)	Intra State roads (US\$)	Combined inter- and intra state roads (d) (US\$)		
Armenia	1983-85	1,281	1,907	3,188	12.20	5,547	2,697	3,827	0.90	0.24
	1995-96	1,629	1,579	3,208	6.60	4,052		2,058		
Azerbaijan	1983-85	1,698	4,330	6,028	26.70	8,894	2,677	4,429	1.20	0.35
	1995-96	1,409	3,280	4,689	10.40	7,381		2,218		
Georgia	1983-85	1,610	3,843	5,453	5.10	1,724	604	935	1.90	0.25
	1995-96	946	4,059	5,005	4.83	5,106		965		
Kazakhstan	1983-85	13,032	32,009	45,041	51.33	1,616	946	1,140	0.80	0.16
	1995-96	6,132	11,364	17,496	25.80	4,207		1,475		
Kyrgyzstan	1983-85	2,849	6,310	9,159	13.80	2,627	843	1,507	0.70	0.21
	1995-96	748	2,363	3,110	5.20	6,956		1,672		
Tajikistan	1983-85	1,310	2,787	4,097	6.04	1,728	1,354	1,474	0.20	0.05
	1995-96	1,089	696	1,785	0.90	826		504		
Turkmenistan (b)	1983-85	1,740	5,329	7,069	4.97	1,785	350	703	2.00	0.20
	1995-96	1,720	3,748	5,468	10.00	5,815		1,829		
Uzbekistan	1983-85	1,656	15,313	16,969	42.11	5,612	989	2,482	0.80	0.30
	1995-96	1,393	20,432	21,825	62.73	14,917	2,053	2,874		

Note: (a) In 1983-1985 this is based on actual allocations. In 1995-1996 it is only based on actual allocations in Kazakhstan and Uzbekistan. Elsewhere it is the per km expenditure if the inter state roads absorbed the whole budget.

(b) Total government expenditure is underestimated and expenditure on roads as a percentage of it is, therefore, overstated.

Source: Consultant's estimates based on data obtained in each country.
Government expenditure data from EBRD and GDP data from EBRD and the World Bank.

6 ROAD USE COSTS AND EXPENDITURE

6.1 General

In this chapter estimates are presented of the total costs of using the inter state and intra state road networks in each of the TRACECA countries. These costs are undiscounted life cycle costs presented on an average annual basis. The road use costs are then compared with the budget - expenditure levels in each country as presented in the last chapter and the excess of required maintenance and rehabilitation expenditure over existing expenditure levels shows the scale of the financing gap, if any.

At this early stage it is important to distinguish clearly between **road use costs** and **road user costs**. Road user costs were discussed at some length in Chapter 3 where they were defined as including the following categories of costs incurred by road users:

- Vehicle operating costs
- Passenger delay costs
- The costs of delays to goods in transit.

Accident costs to road users are also included in road user costs, but they have not been quantified in this study in the absence of adequate data.

Road use costs are the other main component of total road transport costs, namely the costs of building, maintaining and managing or administering roads. These costs include the costs of routine annual maintenance, periodic maintenance and rehabilitation, which are usually incurred by the highway agency or department, and the administrative, policing and other costs incurred by other agencies or government departments.

Although the potential importance of environmental costs in total transport costs is acknowledged, especially where new addition to road infrastructure is involved, they are not discussed further in this study which is mainly concerned with road maintenance and rehabilitation in an inter urban context.

The cost of maintaining and rehabilitating road networks is a function of their initial characteristics and condition, the levels and characteristics of traffic using them, factors associated with the road's physical environment, and the unit costs of roadworks. A rigorous assessment of future road network maintenance and rehabilitation requirements should normally be based on detailed information by road section on road condition, pavement roughness, pavement strength and a number of other engineering factors likely to affect future pavement life and the nature and costs of future roadworks. The assessment would also include detailed analysis of present and future traffic by vehicle type and axle loading and an analysis of road user costs at different road pavement roughness levels. Predictions also have to be made of future pavement performance and pavement surface roughness based on an assessment of the expected impact of traffic.

The most rigorous basis for estimating future road network maintenance and rehabilitation requirements would be an engineering and economic analysis of alternative treatment strategies on a section by section basis. This is the type of approach envisaged in the use of the computerised pavement management system being demonstrated in each country as part of this Project. The nature and

cost of all the section level strategies would be brought together to create a network level road expenditure programme over time and the total costs of this would be calculated on a year by year basis. This approach is very demanding of resources and as a minimum it needs to be based on a detailed highway database of the type which is not yet available in the TRACECA countries at the network level. In summary this is the future aim of the current project which can be seen as the first, the important step for the implementation of the PMS.

A slightly simpler approach, which is still fairly demanding of highway data, involves describing the network in a matrix of hypothetical representative sections combining defined road and traffic characteristics. Optimum maintenance and rehabilitation strategies would be developed for each of these representative road sections on the basis of engineering and economic cost benefit analyses, probably using a computerised model of some sort. In this optimisation analysis different potential, initial and subsequent road expenditure plans would be compared with a "do minimum" scenario in a discounted cash flow analysis and the plan or strategy showing the highest economic Net Present Value (NPV), NPV per kilometre or Benefit -Cost Ratio would be selected. The optimum strategy for each section would be the one minimising total discounted life cycle transport costs in which, it will be remembered, road user costs are the main component. The optimum strategy and the implied road agency expenditure programme over time for each section would be set out and the road costs for all sections would be added up to form an overall expenditure programme from which the average annual road expenditure requirements for the network would be ascertained.

It is important to be clear about the role of road user costs in this process. Road user costs are a vital component of the optimum strategy analysis because they are the largest component of total transport costs associated with each scenario being compared. However, once the optimum maintenance and rehabilitation strategy for each section has been found on the basis of engineering and economic cost benefit analysis, the focus of attention moves to road or road use costs. These are the future highway agency costs which will dictate road expenditure requirements and, hopefully, budgets.

The approach to the estimation of road use costs described later in this chapter is of necessity a highly simplified version of the representative section approach described above. The road use cost analysis has had to be based mainly on readily available data in the highway departments in each country. An exception to this is vehicle axle load data which was collected in a series of special surveys conducted by the Consultant. With the possible exception of Kazakhstan, none of the TRACECA countries has a highway database capable of sustaining the above type of analysis. The detailed databases created for the pilot road sections selected for the introduction and training of the pavement management system under the Project covered approximately 30 kilometres of main road in each country. These sections were not though for and also are too short to form a representative sample of pavement characteristics suitable for extrapolation to the network level. However, all so-called TRACECA roads (marked as ROAD CORRIDOR on the TRACECA Map) were inspected and data recorded for road surface condition category/class with relation to IRI (roughness).

Table 6.1 PAVEMENT STRENGTH INDICATORS IN SELECTED C.I.S COUNTRIES

Country		Modified Structural Number (SNC) by Design Standard Assumed in Road Use Cost Analyses				
		I	II	III	IV	V
Armenia (a)		4.5	4.0	2.6	2.6	2.4
Armenia (b)		7.5	4.8	4.0	3.0	2.3
Azerbaijan		4.9	4.0	3.8	3.5	2.9
Georgia		5.0	4.2	3.5	3.2	2.6
Kazakhstan		4.6	4.0	3.0	2.4	2.0
Kyrgyz Republic		4.6	3.9	3.0	2.8	1.5
Tajikistan		4.6	3.9	3.0	2.8	1.5
Uzbekistan		4.7	4.0	3.0	2.5	2.0
Country		Estimates of Structural Numbers By design Category made in other studies				
		I	II	III	IV	V
Carl Bro International a/s Kyrgyz Republic (Bishkek - Osh Road)	612		3.9	3.6	2.8	
TecnEcon - The Armenia Highway Survey"						
CowiConsult and TecnEcon "Road and Road Transport Study in Russia, Ukraine, Kazakhstan and Belarus"						
Russia - Moscow area	1454.0	6.2	6.8	4.6		1.9
Russia - St Petersburg area	850.0	4.2	5.1	4.6	3.9	2.3
Russia - Samara area	476	5.6	4.6	4.2	3.2	2
Russia - Tjumen area	235		3.8	4.1	3.6	
Russia - Irkutsk area	592			4.4		
Kazakhstan - 2 areas (a)	962	4.6	4.2	3.2	2.8	2.3
Ukraine - 2 areas	1,190	4.2	2.3	1.4		
<i>10 tonne design:</i>						
Normal layer coefficients		8.0	7.0			
Reduced layer coefficients		6.5	5.5			
<i>6 tonne design:</i>						
Normal layer coefficients		5.0	4.5	4.0	3.0	2.0
Reduced layer coefficients		4.0	3.5	3.0	2.5	

Note:

- (a) Assumed from design standards
(b) Based on benkelman beam survey results.

Sources:

- Consultant's estimate.
CowiConsult and TecnEcon - "Roads and Road Transport Study"
(Russia, Ukraine, Kazakhstan and Belarus) - for EBRD, 1992
Carl Bro International a/s - Road (Bishkek-Osh) Rehabilitation Project
- for Asian Development Bank (1995)

The methodology used for estimating road use costs is based on a short cut approach suggested by the World Bank and this is described in greater detail below. However, even this short cut approach requires the following network level information:

- representative daily traffic levels by vehicle type
- axle loading by vehicle type
- pavement strength

The next section sets out the estimates of the above traffic and pavement strength inputs for each country and the process by which they were obtained.

6.2 The Characteristics and Utilisation of the Main Road Networks

6.2.1. Characteristics of the Main Road Networks

The highway institutions and agencies in the TRACECA countries have more or less readily available road inventory information on road geometrics and pavement type, visual road condition survey information and information on the design standard to which individual road sections were built. Except in Armenia and Kazakhstan, there is very little information on pavement strength as measured by Benkelman Beam surveys and virtually no pavement roughness survey data. In general, more and better information is available for the inter state roads than for the intra state or old republican roads. The lack of information on the characteristics of district and local roads precluded their inclusion in the road use cost study, even though they form the largest part of each country's public road network.

The World Bank's short cut approach to road use cost analysis being adopted for this study uses information on pavement strength (modified structural number) as a proxy for pavement characteristic and condition. The absence of pavement strength data in most TRACECA countries is, therefore, a potential obstacle to this form of analysis. Information on road design standards is, however, widely available and this provides the somewhat imperfect guide to potential pavement strength which has had to be used in this study. The main features of the geometric and pavement design standards used in the C.I.S are shown in Annex 6 Table A.6.2. There are, however, differences in pavement design details from country to country, reflecting the differences in geography and climate.

The structural numbers for different pavement design categories shown in Annex 6 Table A.6.2 are based on normal pavement layer coefficients for road construction in the West. However, there are reasons to believe that layer coefficients for roads built in the former Soviet Union can be considerably lower. The reason for this is that roadworks often deviated from the design standards in their implementation. The use of poorer than specified quality materials, variations in sub base thickness and low compaction levels have been three of the more common examples mentioned by highway engineers in the TRACECA and other C.I.S countries. In the "Roads and RoadsTransport Study of Russia, Ukraine, Kazakhstan and Belarus" carried out by CowiConsult and TecEcon for the EBRD in 1992 it was suggested that a general reduction in theoretical layer coefficients of, around, 20 percent was warranted when assessing pavement strength from the design standards. According to the AASHTO Guide for Design of Pavement Structures, this corresponds to a reduction of E-module by 20 percent or CBR values by 30 percent for unbound materials. Our assumptions

about road design standards and pavement strength are based on the above suggestion that a 20 percent reduction in the layer coefficients should be made.

The assumptions used in this study about pavement strength for roads of different design standards are summarised in Table 6.1. This table also shows estimates which have been made in a number of other studies in recent years in the C.I.S. In Armenia there are two alternative pavement strength assumptions. The first is based on design standards as in the other countries, and the second is based on the results of a benkeiman beam survey carried out in 1995. The results of our statistical analysis of the results of this survey are presented in Annex 6 Table A.6.3. The deflections recorded in the survey were converted to Modified Structural Number using a formula recommended in the World Bank's documentation of its HDM-III model. The survey was extensive and the sample of over 2,500 observations was very large. It was, therefore, hoped that the results could form the basis of a more rigorous approach to linking pavement strength to design standards in the TRACECA countries. In practice, however, we have some reservations about the data largely arising from the high degree of uniformity of deflection levels recorded across large lengths of road and different design standards. This may have been the result of the equipment used or its calibration. In the case of Armenia, therefore, the road use cost analysis described later in this chapter is undertaken on the basis of the alternative assumptions about pavement strength shown in Table A.6.3. Deflection surveys have also been undertaken in Kazakhstan in recent years, but the results were only available in the form of a qualitative summary. No alternative pavement strength estimates based on deflection survey results could, therefore, be made.

The length of inter state and intra state roads falling within the five different design categories in each country are shown in Annex 6 Table A.6.1. In each country this summary has been based on an analysis of the detailed section by section road data made available by the respective highway institutions. For certain countries the quality of data available for the intra state network was of variable coverage and in these cases it has been necessary to make assumptions about applicable design categories based on the distribution over the rest of the intra state network. In the case of Azerbaijan it should be noted that the intra state road network defined for this study does not include roads in the occupied territories. There is no up to date information on these roads.

6.2.2 Utilisation of the Main Road Networks

The analysis of traffic levels on the main road networks has largely been based on the results of routine classified traffic surveys undertaken by the respective highway institutes. Most TRACECA countries inherited efficient traffic counting and analysis procedures for inter urban main roads, but subsequent budget cuts have had a significant adverse effect on the coverage of traffic counting programmes in certain countries. Inter state roads are covered in greater detail than are the intra state roads in most countries and for this reason the traffic estimates for inter state roads are more reliable than those for the intra state network.

The traffic estimates for intra state roads in Tadjikistan, Uzbekistan, Armenia, and Georgia are considered to be less reliable than those for the other countries. In Georgia the traffic counting programme virtually ceased between 1991 and 1995 and the counts undertaken within the last eighteen months have concentrated on selected inter state roads. Even now, the traffic survey coverage of Georgia's inter state road network is inadequate and the Consultant carried out supplementary classified volume counts on three inter state roads. The estima-

tes of traffic on Georgia's intra state road network are based on the results of the extensive routine surveys undertaken in the period before 1990, in particular between 1986 and 1990. The average traffic levels indicated in these surveys have then been significantly reduced in accordance with the observed reduction in traffic on inter state roads where recent data made possible a comparison of 1986-1990 and 1995-1996 traffic levels. In Armenia an excellent traffic counting programme has been established, but it is focused on the inter state road network. The only information on intra state road traffic levels is from traffic counts undertaken on roads which were inter state roads but which have recently been classified as intra state roads. Some of the traffic data collected as part of the 1994 "Armenia Highway Survey" comes under this category.

Where traffic data on the intra state networks were inadequate estimates have been based on analysis of traffic levels by road design category on inter state roads and on the original traffic levels inherent in the design category. The traffic thresholds for each design category are as follows:

- | | |
|--------------------------------|--|
| • Design Standard category I. | Average daily traffic (ADT) over 7,000 |
| • Design Standard category II | ADT 3,000 - 7,000 |
| • Design Standard category III | ADT 1,000 - <3,000 |
| • Design Standard category IV | ADT 100 - <1,000 |
| • Design Standard category V | ADT < 100 |

The significant reductions in traffic which have taken place in most TRACECA countries since 1990/1991 may well have nullified a large part of the traffic growth which took place in 1970s and 1980s after the roads were constructed. For this reason, the traffic ranges in the design standard categories may well offer a better guide to current traffic ranges on the intra state roads than would have been the case in a continuous traffic growth environment.

The vehicle classification system used in routine traffic counts in all TRACECA countries except Armenia has a vehicle weight based classification for goods vehicles. In this system trucks are, with some local variations, classified as follows:

- trucks of less than 3 tonnes
- trucks of 3 - <5 tonnes
- trucks of 5 - 8 tonnes
- trucks of over 8 tonnes

An axle based truck classification system is more commonly used internationally and is required for use in the World Bank's HDM-III model. In this study and in the PMS programme system provided to each of the recipient states under the current Project the following vehicle classification system has been used for traffic and axle load inputs. Armenia has also adopted a similar axle based vehicle classification system since traffic surveys were undertaken for the "Armenia Highway Survey" in 1994.

- Passenger cars, jeeps etc.
- Utility vehicles (minibuses, pickups and small vans)
- Large buses
- axle trucks
- axle trucks or truck-trailer combinations
- trucks or truck-trailer combinations of more than 3 axles

The Consultant carried out a large number of moving observer counts on different types of road in each country. Classified volume counts of buses and trucks were carried out as part of the axle load surveys undertaken in Armenia, Azerbaijan, Georgia, Kazakhstan, Kyrgyzstan, Turkmenistan and Uzbekistan. Additional comprehensive classified volume counts were also carried out in Georgia. The results of all these counts were used to convert the results of the official routine counts to the above axle based classification.

The estimates of traffic by road design class were based on detailed analysis of the combined road section and traffic count data. The results of this analysis for each country are presented in Annex 6 Table A.6.4. The overall utilisation of each country's inter state and intra state networks in terms of vehicle kilometres by vehicle type is presented in Table 6.2 below. In the TRACECA region as a whole cars account for just over half the inter urban vehicle kilometres and light utility vehicles make up a further 9 per cent of the total. Large buses account for just under 4 per cent and trucks for just under one third.

Overall, approximately 45 percent of inter urban vehicle kilometres are on inter state roads and 55 per cent are on intra state roads. However, this overall picture is heavily influenced by the very large intra state road networks in Kazakhstan and Uzbekistan. In the other TRACECA countries the inter state networks carry a significantly larger share of total inter urban vehicle kilometres than the intra state networks.

The distribution of equivalent standard axle (ESAL) kilometres shows a very different picture of the potentially damaging impact of vehicles in terms of network utilisation. The summary of ESAL kilometres which is presented in Table 6.3 shows a very different pattern between vehicle types as might be expected from the discussion of pavement damage from axles in Chapter 4. Light vehicles contribute less than 0.2 percent of total ESAL kilometres on inter urban main roads in the TRACECA countries. Large buses account for 32 percent of total ESAL kilometres and trucks account for just over 67 percent. The overall distribution of ESAL kilometres between inter state and intra state roads is once again heavily influenced by Kazakhstan and Uzbekistan in showing inter state roads carrying only 39 per cent of the total. In most countries the inter state network carries between two thirds and three quarters of inter urban ESAL kilometres. Detailed estimates of ESAL kilometres by road design standard on inter state and intra state road networks in each country are presented in Annex 6 Table A.6.5.

Table 6.2 TRACECA COUNTRIES - VEHICLE KILOMETRES BY MAIN ROAD CATEGORY AND VEHICLE TYPE 1996

Country	Road Class	Road Length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
Armenia	Inter State	1,569.1	1,057.7	129.8	90.1	117.3	108.2	23.5	1,526.6
	Intra State (Rep.)	1,578.7	289.2	46.5	16.8	45.2	36.2	9.5	443.4
	Total Main	3,147.8	1,346.9	176.3	106.9	162.5	144.4	33.0	1,970.0
	% total		68.4	8.9	5.4	8.2	7.3	1.7	100.0
Azerbaijan	Inter State	1,409.0	1,272.8	279.2	143.5	521.1	109.0	159.3	2,484.9
	Intra State (Rep.)	3,280.0	694.5	325.9	133.1	542.6	151.7	164.2	2,012.0
	Total Main	4,689.0	1,967.3	605.1	276.6	1,063.7	260.7	323.5	4,496.9
	% total		43.7	13.5	6.2	23.7	5.8	7.2	100.0
Georgia	Inter State	946.0	1,202.4	58.4	113.3	68.1	64.4	26.8	1,533.4
	Intra State (Rep.)	4,059.3	436.1	20.0	35.7	26.8	24.2	12.2	555.0
	Total Main	5,005.3	1,638.5	78.4	149.0	94.9	88.6	39.0	2,088.4
	% total		78.5	3.8	7.1	4.5	4.2	1.9	100.0
Kazakhstan	Inter State	6,132.0	2,594.0	194.0	45.0	811.0	486.0	93.0	4,223.0
	Intra State (Rep.)	11,364.0	3,715.0	322.0	64.0	986.0	549.0	230.0	5,866.0
	Total Main	17,496.0	6,309.0	516.0	109.0	1,797.0	1,035.0	323.0	10,089.0
	% total		62.5	5.1	1.1	17.8	10.3	3.2	100.0
Kyrgyz Rep.	Inter State	747.6	423.6	51.8	30.0	103.0	54.6	25.7	688.7
	Intra State (Rep.)	2,362.3	460.9	83.5	43.6	156.0	37.7	35.7	817.4
	Total Main	3,109.9	884.5	135.3	73.6	259.0	92.3	61.4	1,506.1
	% total		58.7	9.0	4.9	17.2	6.1	4.1	100.0
Tajikistan	Inter State	1,089.1	337.4	27.8	20.5	92.4	50.5	16.5	545.1
	Intra State (Rep.)	696.1	43.2	6.4	2.5	13.5	6.2	3.7	75.5
	Total Main	1,785.2	380.6	34.2	23.0	105.9	56.7	20.2	620.6
	% total		61.3	5.5	3.7	17.1	9.1	3.3	100.0
Turkmenistan	Inter State	1,211.6	761.3	119.1	162.2	532.6	64.2	149.9	1,789.3
	Intra State (Rep.)	6,471.0	741.4	201.9	49.3	190.8	98.6	474.1	1,756.1
	Total Main	7,682.6	1,502.7	321.0	211.5	723.4	162.8	624.0	3,545.4
	% total		42.4	9.1	6.0	20.4	4.6	17.6	100.0
Uzbekistan	Inter State	1,393.0	1,416.6	430.5	116.0	852.4	137.6	119.4	3,072.5
	Intra State (Rep.)	20,432.0	2,777.6	727.0	254.5	2,517.1	699.9	580.7	7,556.8
	Total Main	21,825.0	4,194.2	1,157.5	370.5	3,369.5	837.5	700.1	10,629.3
	% total		39.5	10.9	3.5	31.7	7.9	6.6	100.0

Note: Main roads are defined as the inter state (magistrale) and intra state (republican) road networks.

Source: Consultant's estimates based on the national authorities' road and traffic data.

Table 6.3 TRACECA COUNTRIES - ESAL KILOMETRES BY MAIN ROAD CATEGORY AND VEHICLE TYPE

Country	Road Class	Road Length (km)	ESAL Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
Armenia	Inter State	1,569.1	0.11	0.18	57.19	18.96	44.06	8.36	128.86
	Intra State (Rep.)	1,578.7	0.03	0.07	10.69	7.30	14.75	3.36	36.20
	Total Main	3,147.8	0.14	0.25	67.88	26.26	58.81	11.72	165.06
	% total		0.08	0.15	41.12	15.91	35.63	7.10	100.00
Azerbaijan	Inter State	1,409.0	0.13	0.39	177.10	66.29	19.53	53.92	317.36
	Intra State (Rep.)	3,280.0	0.07	0.46	164.29	69.02	27.19	55.56	316.59
	Total Main	4,689.0	0.20	0.85	341.39	135.31	46.72	109.48	633.95
	% total		0.03	0.13	53.85	21.34	7.37	17.27	100.00
Georgia	Inter State	946.0	0.12	0.08	226.66	6.64	32.22	30.29	296.01
	Intra State (Rep.)	4,059.3	0.04	0.03	71.38	2.61	12.09	13.78	99.93
	Total Main	5,005.3	0.16	0.11	298.04	9.25	44.31	44.07	395.94
	% total		0.04	0.03	75.27	2.34	11.19	11.13	100.00
Kazakhstan	Inter State	6,132.0	0.26	0.27	11.09	36.72	88.08	19.98	156.40
	Intra State (Rep.)	11,364.0	0.37	0.45	16.00	44.66	99.60	49.58	210.66
	Total Main	17,496.0	0.63	0.72	27.09	81.38	187.68	69.56	367.07
	% total		0.17	0.20	7.38	22.17	51.13	18.95	100.00
Kyrgyz Rep.	Inter State	747.6	0.04	0.07	4.97	7.07	9.10	16.26	37.51
	Intra State (Rep.)	2,362.3	0.05	0.12	7.24	10.70	6.28	22.59	46.98
	Total Main	3,109.9	0.09	0.19	12.21	17.77	15.38	38.85	84.49
	% total		0.11	0.22	14.45	21.03	18.20	45.98	100.00
Tajikistan	Inter State	1,089.1	0.03	0.04	2.38	6.34	8.41	10.43	27.63
	Intra State (Rep.)	696.1	0.01	0.01	0.29	0.93	1.03	2.33	4.60
	Total Main	1,785.2	0.04	0.05	2.67	7.27	9.44	12.76	32.23
	% total		0.12	0.16	8.28	22.56	29.29	39.59	100.00
Uzbekistan	Inter State	1,393.0	0.14	0.60	127.61	164.52	25.86	120.77	439.50
	Intra State (Rep.)	20,432.0	0.27	1.01	274.39	476.78	128.24	581.31	1,462.00
	Total Main	21,825.0	0.41	1.61	402.00	641.30	154.10	702.08	1,901.50
	% total		0.0	0.1	21.1	33.7	8.1	36.9	100.0

Note: Main roads are defined as the inter state (magistrale) and intra state (republican) road networks.

Source: Consultant's estimates based on the national authorities' road and traffic data.

6.3 Indicative Estimates of Road Use Costs

6.3.1 General

The estimated cost of using road networks in each country should be a basic input into any discussion about highway financing and road user charging policy. Without a realistic estimate of road use costs, decisions about road budgets are made in a vacuum and any cost recovery policy lacks a credible foundation. Road use costs are defined in this study as the average annual costs of maintaining, rehabilitating and managing road networks over a life cycle of several years. It will be noticed that the cost of adding to the road networks by building new roads is not included in this definition which is basically limited to recurrent costs. The cost of new roads should be considered separately under a capital investment cost heading, However, new roads start incurring recurrent costs as soon as maintenance commences. These recurrent costs should obviously be included in our definition of road use costs. In practice, very few new roads are being built in the TRACECA countries.

Road use costs can be divided into fixed and variable costs. Variable costs comprise that portion of costs which is dependent on traffic and loading. In the long run most road costs are variable to some degree, but it is usual practice to include as a minimum the costs of policing and administration and interest on loans in fixed road costs. There are also portions of routine and periodic maintenance and rehabilitation which are considered to be fixed. It is important to be able to distinguish between fixed and variable road use costs because the distribution between the two has a significant influence on the optimum structure of road user charges. The allocation of road costs between fixed and variable elements usually requires rather detailed research and can be time consuming which was not part of this study, and therefore the division of road costs between fixed and variable elements has been based on the results of analyses carried out by and for the World Bank in many low income countries.

6.3.2 Methodology Used for Estimating Road Use Costs

6.3.2.1 World Bank Short Cut Analysis of Road Use Costs

The approach to estimating road use costs adopted in this study is based on a short cut methodology suggested by the World Bank. This methodology is based on a series of analyses of optimum maintenance strategies using the Highway Design and Maintenance Standards model (HDM-III) and data from a wide range of road studies in low income countries. In the analysis optimum maintenance strategies and the associated life cycle average annual road use costs were developed for a range of combinations of traffic, pavement strength and pavement loading. This range of combinations can be considered as a three dimensional matrix made of cells comprising different combinations of traffic, pavement strength and traffic loading. The optimum maintenance strategy for each combination, or cell in the matrix, involves routine maintenance plus the application of periodic thick or thin overlays at pavement roughness thresholds defined as optimum on the basis of extensive analysis using HDM-III. It also includes reconstruction where relevant. The average annual road use costs associated with each optimum maintenance and rehabilitation strategy are then recorded. The results of the World Bank analysis are set out in Table 6.4.

TABLE6-4.XLS

Table 6.4 AVERAGE ANNUAL ROAD USE COSTS UNDER OPTIMUM MAINTENANCE STRATEGIES

Pavement Strength (Modified Structural Number)	Average annual daily traffic (AADT)	ESA per Lane per Year (million)	Optimum Strategy		Road Use Costs (US\$ per km per year)				
			Treatment overlay thickness (mm)	Intervention roughness threshold (m/km)	Non-traffic related (fixed) costs	Traffic related (variable) costs			Total Road Use Costs
						Vehicle related	Axle loading related	Sub Total	
<i>Moderate traffic loading with normal truck composition</i>									
8	10,000	1.740	80	3.0	3,806	3,216	636	3,852	7,658
8	6,000	1.000	80	3.0	3,155	3,217	432	3,649	6,804
8	3,000	0.260	80	3.0	2,955	2,647	578	3,225	6,180
5	10,000	1.740	80	3.0	3,921	3,365	2,667	6,032	9,953
5	6,000	1.000	80	3.0	3,270	3,038	1,734	4,772	8,042
5	3,000	0.260	40	3.5	3,211	2,391	640	3,031	6,242
5	1,000	0.053	80	7.0	3,062	145	317	462	3,524
5	300	0.014	80	7.0	2,562	128	249	377	2,939
3	3,000	0.260	40	3.5	3,212	2,648	2,128	4,776	7,988
3	1,000	0.053	80	5.0	3,062	379	1,563	1,942	5,004
3	300	0.014	80	7.0	2,562	206	336	542	3,104
2	3,000	0.260	80	3.5	3,272	3,323	2,963	6,286	9,558
2	1,000	0.053	40	4.0	3,122	1,336	1,517	2,853	5,975
2	300	0.014	80	7.0	2,622	290	648	938	3,560
<i>Light traffic loading with normal truck composition</i>									
8	6,000	0.500	80	3.0	3,155	3,217	214	3,431	6,586
5	3,000	0.130	80	3.5	3,211	2,391	605	2,996	6,207
3	1,000	0.025	80	5.0	3,062	379	1,309	1,688	4,750
2	300	0.013	80	7.0	2,622	290	468	758	3,380

Source: World Bank - "Management and Financing of Roads" 1995.

The pavement strength levels considered range from strong pavements with a modified structural number (SNC) of 8 to weak pavements with an SNC of 2. Average daily traffic ranges from 10,000 to 300 vehicles and traffic loading ranges from 1.74 million to 13,000 equivalent standard axles per lane per year were taken for use in the analysis. Analyses were undertaken under alternative assumptions about traffic composition, notably the proportion of trucks in the total. For the purpose of this study the moderate and light traffic loading assumption with normal (20 percent) truck composition was taken to be the most appropriate in view of the low axle loading recorded in the axle surveys carried out in the TRACECA countries.

In its analysis the World Bank distinguishes between fixed and variable road use costs. The distinction is based on the results of many international studies and, for recurrent maintenance and rehabilitation costs, on the results of HDM-III analysis. In this analysis the results of the model runs with predicted traffic were compared with runs where no traffic data was input. The results of the no traffic runs showed the non traffic related or fixed cost components of recurrent costs. All policing and road administration costs were taken as fixed costs and the order of magnitude of these items was based on the results from several international studies.

The road user costs used in the World Bank's HDM-III based maintenance strategy analyses were derived from a range of international studies and relationship between road user costs and pavement roughness would have been derived from the model. Predicted traffic growth rates used in the analysis are not specified by the World Bank, but they would presumably also be based on a wide range of international experience.

The economic and financial unit costs used in the World Bank analyses were also based on extensive international evidence. Economic costs were used in the strategy analyses. The unit costs on which the Bank's road use cost analysis was based were as follows:

<u>Treatment</u>	<u>Economic cost (US\$/km)</u>	<u>Financial cost (US\$/km)</u>
Routine maintenance	1,450 + 0.43 (AADT)	1,700 + 0.5 (AADT)
Reseal	19,400	22,400
Thin overlay (40mm)	47,600	56,000
Thick overlay (80mm)	76,200	90,000
Reconstruction (+2 SNC)	238,000	280,000

There are considerable variations in and uncertainties about the unit costs of roadworks in the C.I.S countries and this largely reflects local price distortions. The results of a comparison of unit costs of different roadworks used in a number of studies sponsored by international donors in recent years are set out in Annex 6 Table A.6.7. There is little discernible pattern in these costs and considerable uncertainty about realistic unit costs in the TRACECA countries. In view of this it was decided to use the unit costs in the World Bank's analysis and not to attempt to modify them to take account of possible local price factors.

It is not possible without a considerable amount of research to determine to what extent the results of the World Bank analyses would overstate or understate road use costs when applied to the TRACECA countries. To the extent that unit costs within the TRACECA region are below international levels in low income countries, the results would tend to overstate these costs, but there is little persuasive evidence either way. There is a tendency to overstate the loading related road use costs because the vehicle damage factors used in the Bank's maintenance strategy analyses are higher than present damage factors in the

TRACECA region. However, there may also be a tendency to understate costs in those parts of the TRACECA region subject to severe winter weather because the HDM-III was not specifically designed to simulate pavement behaviour under extreme freeze-thaw conditions. On balance, the assumption in this study is that the road use costs predicted in the Bank's analyses for different combinations of pavement strength, traffic and loading are of the right order of magnitude.

6.3.2.2 Adaptation of the World Bank's Road Use Cost Estimates

The results of the short cut method of road use cost analysis suggested by the World Bank have been adapted for use in this study. The following main inputs for the analysis for each country have been prepared as described earlier in this chapter:

- Average daily traffic by vehicle type and road design category
- Vehicle kilometres by vehicle type and road design category
- ESAL kilometres and ESA per lane per year by road design category
- Pavement strength as measured by modified structural number for each road design category.

A series of regression analyses has been undertaken on the results of the World Bank analysis shown in Table 6.4 to permit interpolation between the values indicated for pavement strength, traffic and loading. The results of these regression analyses have been used to estimate fixed and variable road use costs resulting from the insertion of the estimated input values for each country. The results of this process are presented in Annex 6 Table A.6.6. The analysis has been run separately for inter state roads and intra state roads.

The regression models used for estimating fixed and variable road use cost values are as follows:

$$FC = 2,716.7 - SNC(51.7) + AADT(0.54) - 3,459.7(ESALY) \quad \text{Adjusted R}^2 = 0.88$$

$$AADTVC = -414.2 - SNC(39.1) + AADT(2.8) - 20,385.9(ESALY) \quad \text{Adjusted R}^2 = 0.83$$

$$TOTALVC = 995.3 - SNC(431.4) + AADT(4.46) - 32201.7(ESALY) \quad \text{Adjusted R}^2 = 0.85$$

where:

FC	=	Fixed costs
AADTVC	=	Traffic related variable costs
TOTALVC	=	Total variable costs
SNC	=	modified structural number
AADT	=	average daily traffic
ESALY	=	equivalent standard axle per lane per year

The loading related variable costs were calculated by subtracting traffic related variable costs from total variable costs.

6.3.3 Estimated Annual Road Use Costs

The results of the estimates of average annual road use costs are summarised in Table 6.5. The detailed results for each country are presented in Annex Table A.6.6. It is emphasised that given the nature of the data on which they are based, particularly the pavement strength assumptions, the resulting estimates must be regarded as indicative rather than definitive.

These estimates understate total road use costs in each country because they do not include most urban, district and local roads. It is felt that even for the inter state and intra state road networks these costs should be considered to be conservative for a number of reasons. In the first place, the present situation with regard to the comparable light axle loading in TRACECA countries may change if there is a switch over time to the use of heavier trucks and if vehicle overloading becomes more common in line with international experience. Both of these factors would increase pavement damage costs and are likely to be an increasingly common feature of the road transport sector when sustained economic recovery starts to take place. Secondly, these road use costs do not include bridge costs, except in Turkmenistan where they were estimated to amount to around 9 percent of potential road use costs.

During the course of field visits to the TRACECA countries the engineers in the respective highway institutions were asked for their estimates of realistic road costs in the absence of a budget constraint. In most cases these estimates were significantly higher than the annual road use costs estimated in this study. With the exception of Kazakhstan, however, local estimates tended to include a significant amount of heavy reconstruction and new road construction even though only estimates for maintenance and rehabilitation was requested. Similarly, the local estimates may have been inflated by the inclusion of non state roads and by representing backlog maintenance needs rather than long term average annual requirements.

The situation in Kazakhstan is different. In early 1996, a World Bank mission assisted by Kazdornii carried out an analysis of the maintenance and rehabilitation requirements of the paved part of the state road network comprising 15,881 kilometres using HDM-III. The data for the analysis was supplied by Kazdornii. The results of this analysis indicated that annual expenditure of US\$ 400 million (US\$ 25,000 per kilometre) would be required to achieve a significant overall improvement in the condition of the paved state road network. A marginal improvement in overall network condition would require annual expenditure of US\$ 200 million (US\$ 12,600 per kilometre) and the expenditure of only US\$ 100 million (US\$ 6,300) would result in further deterioration in overall network condition. Our road use cost estimates for Kazakhstan suggest annual expenditure requirements of US\$ 162 million for a 17,496 kilometre network and this suggests that with this level of expenditure network condition would be more or less static at its present standard. One possible reason for the differences is that the unit costs used in the World Bank mission's analysis were higher than those used in our study which are based on the unit costs used by the World Bank in its short cut methodology. The World Bank mission did express some doubts about the reliability of the unit cost and traffic data on which the HDM-III analyses were based and these uncertainties may account for the high resulting estimates of expenditure requirements.

In general, the indicative annual road use cost estimates presented in this study are unlikely to be overestimates. They do, however, represent a vary substantial increase over current expenditure levels. The summary presented in Table 6.5

shows that average road expenditure levels in 1995/1996 ranged from 43 percent of annual road use costs in Uzbekistan to only 9 percent in Tadjikistan. The overall average for the TRACECA countries was 24 percent. Expressed differently, the current **annual short fall** in expenditure on the inter state and intra state roads is of the following orders of magnitude:

• Armenia	US\$ 23.9 million (US\$ 7,600 per kilometre)
• Azerbaijan	US\$ 49.0 million (US\$ 10.450 per kilometre)
• Georgia	US\$ 27.9 million (US\$ 5,600 per kilometre)
• Kazakhstan	US\$ 135.8 million (US\$ 7,800 per kilometre)
• Kyrgyzstan	US\$ 21.4 million (US\$ 6,900 per kilometre)
• Tadjikistan	US\$ 9.5 million (US\$ 5,325 per kilometre)
• Turkmenistan	US\$ 55.1 million (US\$ 7,200 per kilometre)
• Uzbekistan	US\$ 82.5 million (US\$ 3,800 per kilometre)

Without the sharp decline in road traffic which has taken place in most TRACECA countries in the 1990s the present condition of the main road networks would have been significantly worse than it is today. Unfortunately constraints on government budgets have been so severe in most of the countries that the decline in expenditure on road maintenance and rehabilitation has been much greater than the decline in network utilisation. A continuation of present expenditure levels will, therefore, undoubtedly result in accelerating deterioration in the overall conditions of what in most countries is the nation's most important single category of infrastructure asset. Rising road surface roughness will cause sharp rises in road user costs, as shown in Chapter 3, and this will impact significantly on the broader structure of costs in the respective economies.

There is, therefore, an urgent need to focus attention on the problem of how to finance the required levels of expenditure on the maintenance and rehabilitation of the road networks. Modern ideas on road user charging policy are particularly relevant in this context and these and the potential for financing road expenditure from restructured road user charges are discussed in the next Chapter.

Table 6.5 TRACECA COUNTRIES - ROAD USE COSTS AND CURRENT EXPENDITURE LEVELS ON ROADS

Country	Main Road Network			Average Expenditure 1995/1996 (US\$ million)	Annual Road Use Costs						1995/1996 Expenditure as % of Road Use Costs
	Intra State (km)	Inter State (km)	Total (km)		(US\$ million)			(US\$ / Km)			
					Intra State	Inter State	Total	Inter State	Intra State	Total	
Armenia (a)	1,569	1,579	3,148	6.7	21.6	9.0	30.6	13,766	5,701	9,721	22
Azerbaijan	1,409	3,280	4,689	10.4	31.3	28.1	59.4	22,214	8,567	12,668	18
Georgia	946	4,059	5,005	5.1	17.9	15.1	33.0	18,922	3,720	6,593	15
Kazakhstan	6,132	11,364	17,496	25.8	68.6	93.0	161.6	11,187	8,184	9,236	16
Kyrgyz Republic	748	2,362	3,110	5.2	10.4	16.2	26.6	13,911	6,858	8,553	20
Tajikistan	1,089	696	1,785	0.9	6.2	4.2	10.4	5,693	6,034	5,826	9
Turkmenistan	1,212	6,471	7,683	10.0			65.1			8,474	15
Uzbekistan	1,393	20,432	21,825	62.7	39.1	106.1	145.2	28,069	5,193	6,653	43
	14,497	50,243	64,741	126.8			531.9	14,632	6,205	8,216	24

Note: (a) Based on assumed pavement strength. If the pavement strength estimates based on the deflection survey results are used, total road use costs would be US\$ 29.8 million a year, of which inter state roads would account for US\$ 20.9 million.

Source: Consultant's estimates

7 ROAD USER CHARGES AND COST RECOVERY

7.1 Basic Principles

The present system of financing roads in the TRACECA countries is inadequate and in the absence of radical reform, the situation seems unlikely to improve. It would be unwise to expect that ultimately economic recovery will enable adequate allocations to be made out of general taxation to fully cover the costs of road use. Even in the richest countries increasing constraints on highway budgets have become common.

The present problems of road financing in the TRACECA states are by no means unique to those countries. They have been experienced in equally, if not more severe forms in the lower income countries of Africa and Latin America. Attempts by governments and international donors to solve the road financing problems in these regions in the 1980s and early 1990s led to the emergence of a number of stark conclusions which stimulated the adoption of more radical approaches. The starting point was a critical evaluation of two convictions underlying the traditional approach to road financing. These were:

- Roads are public goods which must necessarily be provided free of charge by the state because the mobility they provide is thought to be a citizen's basic right.
- The best way to provide and maintain roads is through the public administration.

In this respect roads have differed from other modes of transport, such as railways, ports and shipping, and from most public utilities, such as gas and electricity, where payment for use of the facility or service has long been readily accepted. The special treatment of roads may have been the result of the difficulty experienced in developing fair and efficient charging mechanisms for road use. The result was the preferential treatment of road users in comparison with users of other transport modes. Toll roads and the adoption of road funds with access to specially earmarked taxes are an exception to traditional public financing of roads out of general taxation. However, tolling is only practicable in certain clearly defined circumstances and properly functioning road funds are the exception rather than the rule.

The traditional provision of roads as a service perceived to be free is often defended on equity grounds, particularly in the states which are in the process of transition. However, road users are by no means the poorest members of society and they are almost certainly being subsidised by poorer members of society. Failure to charge for road use also means that most road users are unaware of the total road use costs which their travel is causing. This means that they make more trips than if they have to pay charges reflecting realistic road use cost information. They are only aware of their perceived costs of which the most immediately visible is usually the cost of fuel. When road charges are set to cover road use costs, road users have a more rational basis for deciding whether to make the marginal trip. Failure to charge adequately for road use has two linked and undesirable effects.

- More trips are made and road utilisation is greater than would otherwise be the case. This has adverse resource consumption and environmental impacts.

- The resulting higher traffic levels give rise to higher road maintenance costs, which place increased pressure on the state budget. These extra demands on the state budget are the direct consequence of encouraging road use by charging too little for it.

The approach to highway financing which has gained much wider international acceptance in recent years is based on the idea that road user charging systems should be designed to achieve the following objectives:

- to ensure that the revenues required to provide and maintain public roads is raised from road users, including foreign road users, rather than from the general tax payer;
- to price the use of public roads so as to improve economic efficiency in transport by removing price distortions and to charge road users in accordance with their use of road facilities;
- to promote equity between different categories of road users by ensuring, for example, that charges on vehicle operators are related to the road maintenance costs for which they are responsible;
- to establish a link between supply and demand for road infrastructure;
- to increase transparency in the road funding process so that road users can see what funds are being raised from which categories of users and for what purpose and
- to provide for fair competition between road and other transport modes by ensuring that road transport users pay for their use of road infrastructure.

In short, road user charging policy with the above objectives should be designed to maximize net economic benefits by setting charges at a level at least equal to the cost of resources consumed by the use of the road network. These costs, which are sometimes called short run marginal costs, are of two types. The first type covers the cost of damage done to road pavements by the passage of vehicles and include the variable costs of managing and maintaining the network. The second type comprise the costs imposed by road users on other road users and others. These include congestion costs and "external" costs arising, for example, from noise and atmospheric pollution. However, charges only set to cover short run marginal costs would still result in under funding because they would not meet the fixed costs of road use which, as we have seen, are a significant proportion of total road use costs. A road user charging system designed to achieve full recovery of road use costs will, therefore, need to comprise two major elements, a charge or group of charges designed to cover variable or traffic related costs, and additional charges designed to cover fixed road use costs.

Although congestion and external costs are undoubtedly of potential significance, they are not yet of great importance in the TRACECA countries where there is virtually no congestion on the inter urban road networks and relatively little congestion even in the major urban centres. The data on which this study's analyses are based relate to the inter urban state roads and the problem of congestion costs in urban centres must be considered to lie outside the scope of the present work. However, the structure of road user charges discussed below

can readily accommodate charges related to congestion and external costs should it be decided to include these at a later date.

7.2 An Appropriate Structure of Road User Charges

The system of road user charges outlined in this section is designed to cover the fixed and variable costs of road use in the TRACECA countries. The estimated fixed and variable road use costs on the interurban state road networks in each country were presented in Chapter 6. Before describing the different types of charges and their appropriate levels it is important to be clear about what these charges mean. **The levels at which the recommended road user charges have been set in this study are based on the assumption that all the revenues from these charges go into the road system to cover road use costs.** To the extent that the governments wish to obtain a contribution towards general tax revenue from road user charges, the charges would have to be set at a correspondingly higher level. In most of the TRACECA countries some part of existing fuel taxes and other road user charges are used to finance a portion, however small, of road use costs. The recommended charges should, therefore be seen as additional to that portion of existing charges which is not used to cover road use costs.

The recommended structure of road user charges comprises charges designed to cover variable road use costs and fixed costs by means of a quasi two part tariff. The variable costs arise from traffic and vehicle loading and the proportion of costs attributable to each has already been estimated in Chapter 6. The first part of the two part tariff is based on a fuel levy designed to cover total variable road use costs. The fuel levy will not on its own be sufficient to ensure that different categories of vehicles contribute their fair share to road cost recovery. Heavy vehicles impose much higher loading costs on the road network than light vehicles and these loading costs have to be reflected in the second part of the two part tariff.

The fuel levy required to cover variable road use costs is expressed per litre of automotive fuel. Total variable costs are , therefore, divided by total automotive fuel consumption in litres to obtain the fuel levy per litre. In this study no distinction is made between petrol and diesel, but a refinement of the fuel levy to differentiate between the two would be perfectly practicable given the relevant breakdown of consumption between the two. The estimated fuel consumption per vehicle kilometre is based on the analysis of vehicle operating costs described in Chapter 3 and unit consumption by representative vehicle type is then multiplied by the estimated annual vehicle kilometres for each category of vehicles to obtain total fuel consumption on inter urban state roads. This should be less than total automotive fuel consumption to the extent that it excludes consumption on urban, district and local roads.

The second part of the two part road tariff has to cover fixed costs plus an amount to ensure that heavy vehicles are making their full contribution to the variable road use costs for which they are responsible. The application of the fuel levy on its own will not be sufficient to cover all the load related costs imposed by heavy goods vehicles and the adjustment in the second part of the tariff is intended to make good this shortfall in heavy vehicle contributions. The second part of the quasi two part tariff usually comprises one or more of the following types of charges:

- Vehicle licences
- Weight and distance related charges, especially for foreign goods vehicles.

Both of these types of charges are in use in the TRACECA countries, but they are not making an adequate contribution towards cost recovery. Vehicle licence fees are too low and although the unit transit charges for international vehicles are not usually too low, the number of exemptions from them rather reduces their revenue earning potential. In some countries vehicles from C.I.S countries and from neighbouring countries contributing more than 90 per cent of international (non C.I.S) vehicle movements are exempt from paying transit charges as a result of inter-governmental agreements.

Detailed recommendations on road user charges in the second part of the quasi two part tariff are beyond the scope of this study, partly because the appropriate information on vehicle registrations is not readily available at the required level of detail. Vehicle registration data in the TRACECA countries is usually collected by the traffic police departments of the ministries of the interior, and there is a tendency to treat this information as confidential. The result is that obtaining the information can be time consuming and, even when it is made available, it is in excessively aggregated form. Information on the vehicle fleet is one of the most basic items of transport planning information and it should be readily available as a matter of course.

The analysis of appropriate transit charges for international vehicle needs to be based on a detailed analysis of the movements of international vehicles within each country so that reliable estimates of international vehicle kilometres and international equivalent standard axle (ESAL) kilometres by vehicle type can be calculated. Transit charges on international vehicles should be based on international ESAL kilometres. Information on axle loads of international vehicles has been collected, but detailed origin destination survey is beyond the resources of this study and until this information is also available, there will be no adequate basis for estimating appropriate international transit charges. There is also a need to clarify the whole position on exemptions from these charges. For those TRACECA countries where a very large proportion of international vehicles are from countries which are exempt from the transit charges, decisions have to be made about how long the exemptions are to continue. If they are to be regarded as fixed by international obligations, then it is doubtful if international transit charges are a potentially useful source of road use cost recovery.

In this study the recommendations on the appropriate level of vehicle licences required to cover fixed costs and to ensure that heavy vehicles make an adequate contribution to cost recovery fees must be regarded as very approximate. They are also higher than they would be if international transit charges were taken into account. It is regarded as more important for this study to show what the appropriate structure of road user charges should be rather than to attempt to make highly detailed recommendations on the basis of insufficient information.

7.3

Road User Charges Required for Cost Recovery

A simplified computer spreadsheet model for estimating the components of the quasi two part tariff needed to cover road use costs has been set up for each country. The fixed and variable annual road use costs for each country were

estimated in Chapter 6 and these are the starting point for the user charge analysis. The model is simplified because, as explained above, it does not distinguish between petrol and diesel in the fuel levy, it does not include international transit charges, and it does not attempt to make detailed calculations of vehicle licence fees, but rather to indicate what order of magnitude they should be. The allocation of variable road use costs between different categories of vehicles is based on annual vehicle kilometres for the traffic or vehicle related portion and ESAL kilometres for the axle or loading related portion. The results of the simplified model for each country are set out in Annex 7 Table A.7.1 and the method of calculating the individual components is explained below.

Fuel Levy. The fuel levy is required to cover total annual variable road use costs and it is calculated by setting the levy per litre at a rate which, when multiplied by annual automotive fuel consumption in litres, will just cover total variable costs. In this study total automotive fuel consumption has been derived from the vehicle operating cost analyses and estimates of annual vehicle kilometres. If official estimates of total automotive fuel consumption were used, these would be greater than the study estimates because they should also reflect vehicle usage on urban, district and local roads. In practice it is not usually possible to match the fuel levy to total variable road use costs with absolute precision without going to an impossibly small fraction of a currency unit.

A closer look at variable road use costs shows that heavy vehicles account for a very high proportion of the axle or load related portion. The axle or load related part can be calculated for individual vehicle types by dividing total axle related variable cost by annual ESAL kilometres and multiplying the result by the ESAL per vehicle. When the proceeds of the fuel levy for different vehicle types are subtracted from the total variable costs attributable to those vehicle types it is quite common for heavy vehicles to be shown as not covering their fair share of variable costs. In Table A.7.1 this is indicated by the minus signs against individual heavy vehicle categories in the "Variable Cost minus Fuel Levy" columns. This has to be adjusted for in the second half of the quasi two part tariff, particularly when establishing annual licence fee levels for the heavier vehicle categories.

Vehicle Licence Fees. The annual fixed costs of road use have to be covered by a combination of licence fees, international transit charges and, possibly other charges. In this context it is worth noting that duties on imports of automotive vehicles and tyres could be included, but the revenues from such charges are normally incorporated into general tax revenue. In this simplified model, it is assumed that fixed costs plus or minus any small balance remaining from fuel levy revenue need to be covered by vehicle licence revenue. The levels of annual licence fees for the different categories of vehicles have been arrived at by a process of trial and error. However, the underlying principle is based on a capacity to pay concept. For buses this means taking account of passenger carrying capacity and for heavy goods vehicles payload capacity. If international transit charges were included, the amount to be covered by licence fees would be correspondingly lower.

The fuel levies and indicative vehicle licence fees resulting from the analyses in Annex 7 Table A.7.1 are summarised in Table 7.1 below. It has to be emphasised that these estimates assume that all the proceeds go towards full road use cost recovery. If governments were to insist on diverting a portion of the revenue from these user charges to non road uses, the fuel levies and indicative licence levels would have to be correspondingly higher to achieve full cost recovery. Conversely, if some of the revenue required for variable cost recovery is already obtained from existing fuel taxes, the required increase in fuel taxes would be

equal to the fuel levy minus the portion of existing fuel tax earmarked for road expenditure. Similarly, if some portion of fixed road use costs were to be covered by transit charges on international vehicles, the indicated annual vehicle licence fees could be lower.

A note of caution is also in order with regard to the fuel levies. The estimated levies per litre have been based on automotive fuel consumption on the inter urban state road networks. If these levies per litre were to be multiplied by official estimates of total fuel consumption based on fuel sales and import data reflecting total road usage, the total revenue would cover variable road use costs on inter urban roads plus an unspecified portion of variable costs on the urban, district and local road networks. Alternatively, if total variable costs were divided by total officially estimated automotive fuel consumption, the fuel levy per litre would be lower than indicated, but the revenue would only cover variable costs on inter urban state roads. While the latter alternative may be politically more attractive, the former is probably the more desirable option pending the preparation of the necessary estimates of road use costs on the urban, district and local road networks.

Table 7.1 INDICATIVE FUEL LEVIES AND ANNUAL VEHICLE LICENCE FEES
REQUIRED FOR FULL COST RECOVERY

Country	Required Fuel Levy (US cents per litre)	Indicative Annual Licence Fees Per Vehicle (US \$)					
		Cars	Utility Vehicles	Large Buses	Trucks 2 axle	Trucks 3 axle	Trucks > 3 axle
Armenia	5.6	10	15	30	50	100	200
Azerbaijan	3.6	15	20	50	125	205	290
Georgia	5.3	10	13	50	80	140	215
Kazakhstan	4.9	10	15	48	80	115	220
Kyrgyz Republic	5.5	25	45	90	115	200	305
Tajikistan	5.0	(a)	(a)	(a)	(a)	(a)	(a)
Turkmenistan							
Uzbekistan	1.4	10	15	40	100	160	205

Note (a) Impossible to calculate in the absence of vehicle fleet data.

Source: Consultant's estimate

Table A.7.1 (continued) UZBEKISTAN - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: UZBEKISTAN

Fixed costs (US\$)	64,300,000	Percentage covered	99.91
Variable costs - vehicle related (US\$)	43,700,000		
Variable costs - loading related (US\$)	37,100,000		
Variable costs (US\$)	80,800,000	Percentage covered	100.10
TOTAL ROAD USE COSTS (US\$)	145,100,000		
Fuel levy (US\$/litre)	0.0137		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.0137 per litre	Fuel levy US\$/Year	Variable Costs minus Fuel Levy	
	Vehicle related (US\$/veh-km)	Axle related (US\$/ESAL-km)	Total (US\$/veh-km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)			(US\$/Veh-km)	US\$/Year
Car	0.0041	0.0000	0.0041	17,243,270	8,082	17,251,352	0.0110	46,082,254	-0.0069	-28,830,902
Utility	0.0041	0.0000	0.0041	4,758,848	31,226	4,790,074	0.0027	3,076,404	0.0015	1,713,671
Bus	0.0041	0.0212	0.0253	1,523,243	7,851,071	9,374,314	0.0062	2,309,512	0.0191	7,064,802
Truck 2 axle	0.0041	0.0037	0.0078	13,853,079	12,531,101	26,384,181	0.0044	14,864,212	0.0034	11,519,968
Truck 3 axle	0.0041	0.0036	0.0077	3,443,227	3,032,341	6,475,568	0.0074	6,195,825	0.0003	279,743
Truck > 3 axle	0.0041	0.0195	0.0236	2,878,332	13,645,594	16,523,926	0.0119	8,354,083	0.0117	8,169,843
Total (US\$)	43,700,000	37,100,000	80,800,000	43,700,000	37,099,415	80,799,415		80,882,290		-82,875

Vehicle type	ANNUAL FIXED COSTS (US\$)	Variable Costs minus Fuel Levy (US\$)	Fixed costs to be covered (US\$)	Possible annual licence fee (US\$)	Potential Licence Fee Revenue (US\$)	TOTAL ROAD USER CHARGES	
						(US\$/Vehicle-km)	(US\$) (million)
Car		-28,830,902		10.0	8,460,000	0.0130	54.54
Utility		1,713,671		15.0	3,216,000	0.0054	6.29
Bus		7,064,802		40.0	27,020,000	0.0792	29.33
Truck 2 axle		11,519,968		100.0	14,040,000	0.0086	28.90
Truck 3 axle		279,743		160.0	5,520,000	0.0140	11.72
Truck > 3 axle		8,169,843		205.0	5,986,000	0.0205	14.34
Total	64,300,000	-82,875	64,217,125		64,242,000	0.0137	145.12

Vehicle type	Estimated vehicle fleet	Vehicle kilometres (million)	ESAL kilometres (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	846,000	4,194.10	0.42	0.0001	0.80
Utility	214,400	1,157.50	1.62	0.0014	0.19
Bus	675,500	370.50	407.49	1.0997	0.46
Truck 2 axle	140,400	3,369.50	650.31	0.1930	0.32
Truck 3 axle	34,500	837.50	157.36	0.1879	0.54
Truck > 3 axle	29,200	700.10	708.14	1.0115	0.87
	1,940,000	10,629.20	1,925.34		

Table A.7.1 (continued) KYRGYZ REPUBLIC - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: **KYRGYZ REPUBLIC**

Fixed costs (US\$)	10,100,000	Percentage covered	99.54
Variable costs - vehicle related (US\$)	9,400,000		
Variable costs - loading related (US\$)	7,100,000		
Variable costs (US\$)	16,500,000	Percentage covered	100.31
TOTAL ROAD USE COSTS (US\$)	26,600,000		
<i>Fuel levy (US\$/litre)</i>	<i>0.055</i>		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.055 per litre	Fuel levy US\$/ Year	Variable Costs minus Fuel Levy	
	Vehicle related (US\$/ veh-km)	Axle related (US\$/ ESAL-km)	Total (US\$/ veh km)	Vehicle related (US\$.)	Axle related (US\$.)	Total (US\$.)			(US\$/ Veh-km)	US\$/ Year
Car	0.0062	0.0000	0.0062	5,520,417	7,432	5,527,849	0.0044	3,935,096	0.0018	1,592,753
Utility	0.0062	0.0001	0.0064	844,446	15,916	860,362	0.0100	1,354,353	-0.0037	-493,991
Bus	0.0062	0.0139	0.0202	459,359	1,026,568	1,485,926	0.0267	1,967,328	-0.0065	-481,402
Truck 2 axle	0.0062	0.0058	0.0120	1,616,493	1,492,882	3,109,375	0.0166	4,287,745	-0.0045	-1,178,370
Truck 3 axle	0.0062	0.0140	0.0202	576,071	1,292,823	1,868,893	0.0252	2,325,037	-0.0049	-456,144
Truck > 3 axle	0.0062	0.0532	0.0595	383,215	3,268,260	3,651,475	0.0437	2,681,338	0.0158	970,137
Total (US\$)	9,400,000	7,100,000	16,500,000	9,400,000	7,103,880	16,503,880		16,550,897		-47,017

Vehicle type	ANNUAL FIXED COSTS	Variable Costs minus Fuel Levy	Fixed costs to be covered	Possible annual licence fee	Potential Licence Fee Revenue	TOTAL ROAD USER CHARGES	
	(US\$)	(US\$)	(US\$)	(US\$)	(US\$)	(US\$/ Vehicle-km)	(US\$) (million)
Car		1,592,753		25.0	6,825,000	0.0122	10.76
Utility		-493,991		45.0	252,000	0.0119	1.61
Bus		-481,402		90.0	279,000	0.0305	2.25
Truck 2 axle		-1,178,370		115.0	1,184,500	0.0211	5.47
Truck 3 axle		-456,144		200.0	720,000	0.0330	3.05
Truck > 3 axle		970,137		305.0	793,000	0.0566	3.47
Total	10,100,000	-47,017	10,052,983		10,053,500	0.0177	26.60

Vehicle type	Estimated vehicle fleet	Vehicle kilometres (million)	ESAL kilometres (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	273,000	884.50	0.09	0.0001	0.08
Utility	5,600	135.30	0.19	0.0014	0.18
Bus	3,100	73.60	12.21	0.1660	0.49
Truck 2 axle	10,300	259.00	17.77	0.0686	0.30
Truck 3 axle	3,600	92.30	15.38	0.1667	0.46
Truck > 3 axle	2,600	61.40	38.86	0.6335	0.79
	298,200	1,506.10	84.50		

Table A.7.1 (continued) TAJIKISTAN - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: **TAJIKISTAN**

Fixed costs (US\$)	4,000,000	Percentage covered	0.00
Variable costs - vehicle related (US\$)	3,500,000		
Variable costs - loading related (US\$)	2,700,000		
Variable costs (US\$)	6,200,000	Percentage covered	100.45
TOTAL ROAD USE COSTS (US\$)	10,200,000		
Fuel levy (US\$/litre)	0.05		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.05 per litre	Fuel levy US\$ / Year	Variable Costs minus Fuel Levy	
	Vehicle related (US\$ / veh-km)	Axle related (US\$ / ESAL-km)	Total (US\$ / veh km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)			(US\$ / Veh-km)	US\$ / Year
	Car	0.0056	0.0000	0.0056	2,146,471	3,188			2,149,660	0.0040
Utility	0.0056	0.0001	0.0058	192,878	4,011	196,889	0.0093	316,350	-0.0035	-119,461
Bus	0.0056	0.0097	0.0154	129,713	223,506	353,219	0.0232	533,600	-0.0078	-180,381
Truck 2 axle	0.0056	0.0057	0.0114	597,245	608,588	1,205,833	0.0152	1,609,680	-0.0038	-403,847
Truck 3 axle	0.0056	0.0140	0.0196	319,771	791,812	1,111,583	0.0247	1,397,655	-0.0050	-286,072
Truck > 3 axle	0.0056	0.0531	0.0587	113,922	1,072,016	1,185,938	0.0420	848,400	0.0167	337,538
Total (US\$)	3,500,000	2,700,000	6,200,000	3,500,000	2,703,122	6,203,122		6,228,085		-24,963

Vehicle type	ANNUAL FIXED COSTS (US\$)	Variable Costs minus Fuel Levy (US\$)	Fixed costs to be covered (US\$)	Possible annual licence fee (US\$)	Potential Licence Fee Revenue (US\$)	TOTAL ROAD USER CHARGES	
						(US\$ / Vehicle-km)	(US\$) (million)
Car		627,260			0	0.0040	1.52
Utility		-119,461			0	0.0093	0.32
Bus		-180,381			0	0.0232	0.53
Truck 2 axle		-403,847			0	0.0152	1.61
Truck 3 axle		-286,072			0	0.0247	1.40
Truck > 3 axle		337,538			0	0.0420	0.85
Total	4,000,000	-24,963	3,975,037		0	0.0100	6.23

Vehicle type	Estimated vehicle fleet	Vehicle kilometre (million)	ESAL kilometre (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car		380.60	0.04	0.0001	0.08
Utility		34.20	0.05	0.0014	0.19
Bus		23.00	2.67	0.1160	0.46
Truck 2 axle		105.90	7.27	0.0686	0.30
Truck 3 axle		56.70	9.44	0.1667	0.49
Truck > 3 axle		20.20	12.76	0.6335	0.84
	0	620.60	32.23		

Table A.7.1 (continued) KAZAKHSTAN - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: **KAZAKHSTAN**

Fixed costs (US\$)	57,300,000	Percentage covered	99.81
Variable costs - vehicle related (US\$)	60,500,000		
Variable costs - loading related (US\$)	43,900,000		
Variable costs (US\$)	104,400,000	Percentage covered	100.08
TOTAL ROAD USE COSTS (US\$)	161,700,000		
<i>Fuel levy (US\$/litre)</i>	<i>0.0492</i>		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km)	Fuel levy	Variable Costs minus Fuel Levy	
	Vehicle related (US\$ / veh-km)	Axle related (US\$ / ESAL-km)	Total (US\$ / veh km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)	@ 0.0492 per litre	US\$ / Year	(US\$ / Veh-km)	US\$ / Year
Car	0.0060	0.0000	0.0060	37,832,739	75,459	37,908,198	0.0040	25,108,482	0.0020	12,799,715
Utility	0.0060	0.0002	0.0062	3,094,261	86,403	3,180,664	0.0091	4,671,245	-0.0029	-1,490,581
Bus	0.0060	0.0297	0.0357	653,633	3,233,176	3,886,808	0.0228	2,488,339	0.0128	1,398,469
Truck 2 axle	0.0060	0.0054	0.0114	10,775,944	9,736,377	20,512,322	0.0150	26,877,370	-0.0035	-6,365,048
Truck 3 axle	0.0060	0.0217	0.0277	6,206,512	22,455,812	28,662,324	0.0306	31,622,562	-0.0029	-2,960,238
Truck > 3 axle	0.0060	0.0257	0.0317	1,936,911	8,298,277	10,235,188	0.0425	13,714,451	-0.0108	-3,479,262
Total (US\$)	60,500,000	43,900,000	104,400,000	60,500,000	43,885,504	104,385,504		104,482,449		-96,945

Vehicle type	ANNUAL FIXED COSTS (US\$)	Variable Costs minus Fuel Levy (US\$)	Fixed costs to be covered (US\$)	Possible annual licence fee (US\$)	Potential Licence Fee Revenue (US\$)	TOTAL ROAD USER CHARGES	
	(US\$)	(US\$)	(US\$)	(US\$)	(US\$)	(US\$ / Vehicle-km)	(US\$) (million)
Car		12,799,715		10.0	10,113,000	0.0056	35.22
Utility		-1,490,581		15.0	1,230,000	0.0114	5.90
Bus		1,398,469		47.5	2,075,750	0.0419	4.56
Truck 2 axle		-6,365,048		80.0	18,816,000	0.0254	45.69
Truck 3 axle		-2,960,238		115.0	15,651,500	0.0457	47.27
Truck > 3 axle		-3,479,262		220.0	9,306,000	0.0713	23.02
Total	57,300,000	-96,945	57,203,055		57,192,250	0.0160	161.67

Vehicle type	Estimated vehicle fleet	Vehicle kilometre (million)	ESAL kilometre (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	1,011,300	6,309.00	0.63	0.0001	0.08
Utility	82,000	516.00	0.72	0.0014	0.18
Bus	43,700	109.00	27.09	0.2480	0.46
Truck 2 axle	235,200	1,797.00	81.36	0.0453	0.30
Truck 3 axle	136,100	1,035.00	187.68	0.1814	0.62
Truck > 3 axle	42,300	323.00	69.56	0.2148	0.86
	1,550,600	10,089.00	367.04		

Table A.7.1 (continued) GEORGIA - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: GEORGIA

Fixed costs (US\$)	15,200,000	Percentage covered	100.24
Variable costs - vehicle related (US\$)	10,100,000		
Variable costs - loading related (US\$)	7,600,000		
Variable costs (US\$)	17,700,000	Percentage covered	99.99
TOTAL ROAD USE COSTS (US\$)	32,900,000		
Fuel levy (US\$/litre)	0.0534		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.0534 per litre	Fuel levy US\$ / Year	Variable Costs minus Fuel Levy	
	Vehicle related (US\$ / veh-km)	Axle related (US\$ / ESAL-km)	Total (US\$ / veh km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)			(US\$ / Veh-km)	US\$ / Year
Car	0.0048	0.0000	0.0048	7,924,176	3,145	7,927,321	0.0043	7,077,543	0.0005	849,778
Utility	0.0048	0.0000	0.0049	379,161	2,107	381,268	0.0106	828,939	-0.0057	-447,671
Bus	0.0048	0.0384	0.0432	720,600	5,720,289	6,440,889	0.0257	3,835,081	0.0175	2,605,807
Truck 2 axle	0.0048	0.0019	0.0067	458,959	177,421	636,380	0.0154	1,464,554	-0.0087	-828,174
Truck 3 axle	0.0048	0.0096	0.0144	428,491	851,003	1,279,494	0.0302	2,677,882	-0.0158	-1,398,388
Truck > 3 axle	0.0048	0.0217	0.0265	188,613	845,608	1,034,222	0.0465	1,813,945	-0.0200	-779,723
Total (US\$)	10,100,000	7,600,000	17,700,000	10,100,000	7,599,573	17,699,573		17,697,944		1,630

Vehicle type	ANNUAL FIXED COSTS (US\$)	Variable Costs minus Fuel Levy (US\$)	Fixed costs to be covered (US\$)	Possible annual licence fee (US\$)	Potential contribution to Fixed Cost coverage (US\$)	TOTAL ROAD USER CHARGES	
						(US\$ / Vehicle-km)	(US\$) (million)
Car		849,778		10.0	3,606,000	0.0065	10.68
Utility		-447,671		12.5	178,750	0.0129	1.01
Bus		2,605,807		50.0	510,000	0.0292	4.35
Truck 2 axle		-828,174		80.0	2,288,000	0.0395	3.75
Truck 3 axle		-1,398,388		140.0	3,752,000	0.0726	6.43
Truck > 3 axle		-779,723		215.0	4,902,000	0.1722	6.72
Total	15,200,000	1,630	15,201,630		15,236,750	0.0158	32.93

Vehicle type	Estimated vehicle fleet	Vehicle kilometres (million)	ESAL kilometres (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	360,600	1,638.50	0.16	0.0001	0.08
Utility	14,300	78.40	0.11	0.0014	0.20
Bus	10,200	149.00	298.04	2.0001	0.48
Truck 2 axle	28,600	94.90	9.25	0.0974	0.29
Truck 3 axle	26,800	88.60	44.31	0.5004	0.57
Truck > 3 axle	22,800	39.00	44.07	1.1296	0.87
	463,300	2,088.40	395.94		

Table A.7. (continued) AZERBAIJAN - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: AZERBAIJAN

Fixed costs (US\$)	17,400,000	Percentage covered	100.26
Variable costs - vehicle related (US\$)	25,600,000		
Variable costs - loading related (US\$)	16,400,000		
Variable costs (US\$)	42,000,000	Percentage covered	99.77
TOTAL ROAD USE COSTS (US\$)	59,400,000		
Fuel levy (US\$/litre)	0.03633		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.03633 per litre	Fuel levy US\$ / Year	Variable Costs Fuel Levy	
	Vehicle related (US\$ / veh-km)	Axle related (US\$ / ESAL-km)	Total (US\$ / veh km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)			(US\$ / Veh-km)	US\$ / Year
Car	0.0057	0.0000	0.0057	11,199,466	5,089	11,204,556	0.0029	5,781,371	0.0028	5,423,185
Utility	0.0057	0.0000	0.0057	3,444,720	21,915	3,466,635	0.0065	3,913,464	-0.0007	-446,829
Bus	0.0057	0.0319	0.0376	1,574,631	8,830,663	10,405,295	0.0165	4,564,401	0.0211	5,840,893
Truck 2 axle	0.0057	0.0033	0.0090	6,055,443	3,500,234	9,555,677	0.0117	12,402,090	-0.0027	-2,846,413
Truck 3 axle	0.0057	0.0046	0.0103	1,484,116	1,208,565	2,692,680	0.0196	5,107,740	-0.0093	-2,415,060
Truck > 3 axle	0.0057	0.0088	0.0144	1,841,624	2,832,014	4,673,639	0.0313	10,136,046	-0.0169	-5,462,408
Total (US\$)	25,600,000	16,400,000	42,000,000	25,600,000	16,398,481	41,998,481		41,905,112		93,368

Vehicle type	ANNUAL FIXED COSTS (US\$)	Variable Costs minus Fuel Levy (US\$)	Fixed costs to be covered (US\$)	Possible annual licence fee (US\$)	Potential licence fee revenue (US\$)	TOTAL ROAD USER CHARGES	
						(US\$ / Vehicle-km)	(US\$) (million)
Car		5,423,185		15.00	4,446,000	0.0052	10.23
Utility		-446,829		20.00	510,000	0.0073	4.42
Bus		5,840,893		50.00	550,000	0.0185	5.11
Truck 2 axle		-2,846,413		125.00	5,662,500	0.0170	18.06
Truck 3 axle		-2,415,060		205.00	2,275,500	0.0283	7.38
Truck > 3 axle		-5,462,408		290.00	4,002,000	0.0437	14.14
Total	17,400,000	93,368	17,493,368		17,446,000	0.0132	59.35

Vehicle type	Estimated vehicle fleet	Vehicle kilometres (million)	ESAL kilometres (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	296,400	1,967.30	0.20	0.0001	0.08
Utility	25,500	605.10	0.85	0.0014	0.18
Bus	11,000	276.60	341.39	1.2341	0.45
Truck 2 axle	45,300	1,063.70	135.31	0.1272	0.32
Truck 3 axle	11,100	260.70	46.72	0.1792	0.54
Truck > 3 axle	13,800	323.50	109.48	0.3384	0.86
	403,100	4,496.90	633.95		

Table A.7.1 ARMENIA - ROAD USER CHARGES REQUIRED TO COVER FIXED AND VARIABLE ROAD USE COSTS

Country: ARMENIA

Fixed costs (US\$)	10,600,000	Percentage covered	99.83
Variable costs - vehicle related (US\$)	11,700,000		
Variable costs - loading related (US\$)	7,600,000		
Variable costs (US\$)	19,300,000	Percentage covered	100.04
TOTAL ROAD USE COSTS (US\$)	29,900,000		
<i>Fuel levy (US\$/litre)</i>	<i>0.0556</i>		

Vehicle type	VARIABLE COSTS OF ROAD USE (ANNUAL)						Fuel levy (US\$/veh-km) @ 0.0556 per litre	Fuel levy US\$ / Year	Variable Costs minus Fuel Levy	
	Vehicle related (US\$ / veh-km)	Axle related (US\$ / ESAL-km)	Total (US\$ / veh km)	Vehicle related (US\$)	Axle related (US\$)	Total (US\$)			(US\$ / Veh-km)	US\$ / Year
Car	0.0059	0.0000	0.0059	8,000,168	6,202	8,006,370	0.0045	6,057,661	0.0014	1,948,708
Utility	0.0059	0.0001	0.0060	1,046,573	11,359	1,057,932	0.0099	1,744,012	-0.0039	-686,080
Bus	0.0059	0.0292	0.0352	634,953	3,124,774	3,759,727	0.0253	2,699,720	0.0099	1,060,007
Truck 2 axle	0.0059	0.0074	0.0134	965,200	1,209,202	2,174,401	0.0178	2,899,603	-0.0045	-725,201
Truck 3 axle	0.0059	0.0188	0.0247	857,691	2,708,230	3,565,921	0.0300	4,329,765	-0.0053	-763,844
Truck >3 axle	0.0059	0.0164	0.0224	195,416	540,233	735,649	0.0480	1,577,610	-0.0256	-841,961
Total (US\$)	11,700,000	7,600,000	19,300,000	11,700,000	7,600,000	19,300,000		19,308,371		-8,371

Vehicle type	ANNUAL FIXED COSTS	Variable Costs minus Fuel Levy	Fixed costs to be covered	Possible annual licence fee	Potential Licence Fee Revenue	TOTAL ROAD USER CHARGES	
	(US\$)	(US\$)	(US\$)	(US\$)	(US\$)	(US\$ / Vehicle-km)	(US\$) (million)
Car		1,948,708		10	2,940,000	0.0067	9.00
Utility		-686,080		15	577,500	0.0132	2.32
Bus		1,060,007		30	699,000	0.0318	3.40
Truck 2 axle		-725,201		50	1,775,000	0.0288	4.67
Truck 3 axle		-763,844		100	3,150,000	0.0518	7.48
Truck >3 axle		-841,961		200	1,440,000	0.0917	3.02
Total	10,600,000	-8,371	10,591,629		10,581,500	0.0152	29.89

Vehicle type	Estimated vehicle fleet	Vehicle kilometres (million)	ESAL kilometres (million)	ESA per vehicle	Fuel Consumption (litres/veh-km)
Car	294,000	1,346.90	0.13	0.0001	0.08
Utility	38,500	176.20	0.25	0.0014	0.18
Bus	23,300	106.90	67.86	0.6348	0.45
Truck 2 axle	35,500	162.50	26.26	0.1616	0.32
Truck 3 axle	31,500	144.40	58.81	0.4073	0.54
Truck >3 axle	7,200	32.90	11.73	0.3566	0.86
	430,000	1,969.80	165.05		

ANNEX 7

Table A.6.7 COMPARISON OF ROAD REHABILITATION AND MAINTENANCE COSTS - EASTERN EUROPE AND C.I.S COUNTRIES

Type of Roadworks	Unit Costs (US\$ / kilometre) assuming 7.5 metre pavement								
	Kazakhstan	Armenia			Turkmenistan	Kyrgyz Republic	Russia -	Azerbaijan	Croatia
	World Bank Mission and Kazdornii 1996	Armenia Highway Survey (1) 1994	World Bank revised estimates 1994	ARD - PIU 1996	(2) 1995	(3) 1995	World Bank (4) 1993	(5) 1995	(6) 1988
Periodic Maintenance									
Surface Dressing	9,600-17,100	14,025	7,000	12,750	12,000			11,475	23,025
4cm Overlay	78,200						52,500	34,425	56,025
4cm Overlay with levelling course							97,500		
5cm Overlay		50,000	32,000						
5cm Overlay without levelling				30,375					
5cm Overlay + 40% Levelling				42,750					
5cm Overlay + 100% Levelling				53,906					
6cm Overlay	109,200								
6cm Overlay (cold mix asphalt) inc.preparation of the old pavement					52,500				
8cm Overlay	144,600				90,000		90,000		96,000
8cm Overlay with levelling course							135,000		
9cm Overlay		120,000							
10cm Overlay	167,100								
Overlay (inc.repair & regulation of existing surface where necessary)							75,000		
Repair, regulation, overlay & full edge strengthening where necessary							101,775		
Repair, regulation, overlay & full edge strengthening							128,550		189,975
Strengthening (5cm surface layer & 8cm base course)					135,000				
Partial Reconstruction	257,000	200,000	120,000	136,500	225,000		225,000		
Heavy reconstruction				167,063					
Reconstruction of existing pavement (full depth)							503,550		
Reconstruction of existing road (inc. embankment)							680,325		

Sources:

- (1) TecnEcon - "The Armenia Highway Survey"
- (2) Kocks Consult & TecnEcon - "Review of Administration and Financing of Road Improvement"
- (3) Carl Bro International a/s - "Road Rehabilitation Project for Asian Development Bank - Kyrgyz Republic" (Bishkek - Osh Road)
- (4) World Bank
- (5) Wilbur Smith & Associates - "Pre-Feasibility Study of Baku-Astara Road"
- (6) World Bank - quoted in "Highway Rehabilitation & Maintenance in Central & Eastern Europe - A Survey"

Table A.6.6 (continued) UZBEKISTAN - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: **UZBEKISTAN**

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	759	4.7	6,971	0.090	5,941	17,094	10,069	27,163	33,104	4.5	13.0	7.6	20.6	25.1
Inter State	2	445	4.0	5,907	0.150	5,193	12,918	7,870	20,787	25,980	2.3	5.7	3.5	9.3	11.6
Inter State	3	130	3.0	2,941	0.080	3,879	6,076	4,167	10,243	14,122	0.5	0.8	0.5	1.3	1.8
Inter State	4	52	2.5	2,101	0.070	3,484	3,946	3,088	7,034	10,518	0.2	0.2	0.2	0.4	0.5
Inter State	5	7	2.0	982	0.030						0.0	0.0	0.0	0.0	0.0
Inter State	Total	1,393				5,388	14,155	8,505	22,659	28,047	7.5	19.7	11.8	31.6	39.1
Intra State	1	995	4.7	3,994	0.070						0.0	0.0	0.0	0.0	0.0
Intra State	2	4,542	4.0	1,764	0.060	3,258	3,148	2,058	5,206	8,464	14.8	14.3	9.3	23.6	38.4
Intra State	3	5,950	3.0	682	0.030	2,827	767	1,010	1,777	4,604	16.8	4.6	6.0	10.6	27.4
Intra State	4	7,462	2.5	565	0.020	2,824	663	1,130	1,793	4,617	21.1	4.9	8.4	13.4	34.5
Intra State	5	1,483	2.0	300	0.010	2,741	144	1,004	1,149	3,890	4.1	0.2	1.5	1.7	5.8
Intra State	Total	20,432				2,778	1,176	1,237	2,413	5,191	56.8	24.0	25.3	49.3	106.1
TOTAL		21,825				2,945	2,004	1,701	3,705	6,650	64.3	43.7	37.1	80.9	145.1

Source: Consultant's estimates

Table A.6.6 (continued) TAJIKISTAN - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: TAJIKISTAN

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	6	4.6	6,702	0.030	6,008	17,567	10,371	27,939	33,946	0.0	0.1	0.1	0.2	0.2
Inter State	2	43	3.9	3,618	0.020	4,407	9,160	5,647	14,807	19,213	0.2	0.4	0.2	0.6	0.8
Inter State	3	336	3.0	1,840	0.010	3,524	4,419	3,167	7,586	11,110	1.2	1.5	1.1	2.5	3.7
Inter State	4	178	2.8	1,186	0.010	3,180	2,595	2,161	4,755	7,935	0.6	0.5	0.4	0.8	1.4
Inter State	5	527	1.5	891	0.000										
Inter State	Total	1,089				1,811	2,242	1,608	3,851	5,662	2.0	2.4	1.8	4.2	6.2
Intra State	1	0													
Intra State	2	103	3.9	2,233	0.010	3,691	5,484	3,466	8,951	12,642	0.4	0.6	0.4	0.9	1.3
Intra State	3	100	3.0	1,294	0.010	3,228	2,889	2,261	5,151	8,379	0.3	0.3	0.2	0.5	0.8
Intra State	4	140	2.8	540	0.000	2,864	985	1,205	2,189	5,053	0.4	0.1	0.2	0.3	0.7
Intra State	5	354	1.5	142	0.000	2,716	0	978	978	3,694	1.0	0.1	0.2	0.3	1.3
Intra State	Total	696				2,963	1,424	1,576	3,000	5,963	2.1	1.1	1.0	2.1	4.2
TOTAL		1,785				2,261	1,923	1,596	3,519	5,779	4.0	3.5	2.7	6.3	10.3

Source: Consultant's estimates

Table A.6.6 (continued) KYRGYZ REPUBLIC - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: **KYRGYZ REPUBLIC**

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	12	4.6	10,251	0.040	7,897	27,305	16,142	43,447	51,344	0.1	0.3	0.2	0.5	0.6
Inter State	2	209	3.9	6,195	0.040	5,735	15,971	9,686	25,657	31,392	1.2	3.3	2.0	5.4	6.6
Inter State	3	138	3.0	1,543	0.020	3,329	3,383	2,556	5,939	9,268	0.5	0.5	0.4	0.8	1.3
Inter State	4	389	2.8	651	0.020	2,856	892	1,155	2,047	4,903	1.1	0.3	0.4	0.8	1.9
Inter State	5	0													
Inter State	Total	748				3,831	6,001	4,045	10,046	13,876	2.9	4.5	3.0	7.5	10.4
Intra State	1	0													
Intra State	2	188	3.9	3,953	0.010	4,623	10,302	6,321	16,623	21,246	0.9	1.9	1.2	3.1	4.0
Intra State	3	885	3.0	1,187	0.010	3,170	2,590	2,084	4,674	7,844	2.8	2.3	1.8	4.1	6.9
Intra State	4	1,141	2.8	381	0.002	2,771	503	919	1,422	4,194	3.2	0.6	1.0	1.6	4.8
Intra State	5	149	1.5	85	0.000	2,684	0	714	714	3,398	0.4	0.1	0.0	0.1	0.5
Intra State	Total	2,362				3,062	2,031	1,772	3,803	6,865	7.2	4.9	4.1	9.0	16.2
TOTAL		3,110				3,247	2,985	2,318	5,303	8,550	10.1	9.4	7.1	16.5	26.6

Source: Consultant's estimates

Table A.6.6 (continued) KAZAKHSTAN - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: KAZAKHSTAN

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	272	4.6	3,717	0.010	4,459	9,614	5,654	15,268	19,727	1.2	2.6	1.5	4.2	5.4
Inter State	2	1,634	4.0	2,436	0.010	3,796	6,049	3,764	9,813	13,609	6.2	9.9	6.2	16.0	22.2
Inter State	3	4,037	3.0	1,563	0.010	3,374	3,643	2,708	6,351	9,725	13.6	14.7	10.9	25.6	39.3
Inter State	4	189	2.4	1,409	0.010	3,322	3,235	2,688	5,923	9,244	0.6	0.6	0.5	1.1	1.7
Inter State	5	0	2.0		0.000						0.0	0.0	0.0	0.0	0.0
Inter State	Total	6,132				3,533	4,536	3,119	7,656	11,189	21.7	27.8	19.1	46.9	68.6
Intra State	1	361	4.6	4,066	0.010						0.0	0.0	0.0	0.0	0.0
Intra State	2	1,419	4.0	1,933	0.020	3,488	4,436	2,811	7,248	10,736	5.0	6.3	4.0	10.3	15.2
Intra State	3	9,268	3.0	1,253	0.010	3,206	2,775	2,193	4,968	8,174	29.7	25.7	20.3	46.0	75.8
Intra State	4	273	2.4	810	0.010	2,997	1,557	1,694	3,251	6,248	0.8	0.4	0.5	0.9	1.7
Intra State	5	43	2.0	772	0.004	3,018	1,589	1,858	3,447	6,465	0.1	0.2	-0.1	0.1	0.3
Intra State	Total	11,364				3,134	2,860	2,188	5,048	8,182	35.6	32.6	24.7	57.4	93.0
TOTAL		17,496				3,274	3,448	2,514	5,962	9,235	57.3	60.5	43.9	104.3	161.6

Source: Consultant's estimates

Table A.6.6 (continued) GEORGIA - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: **GEORGIA**

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicles Related	Axle Related	Sub Total	
Inter State	1	37	5.0	9,114	0.160	6,845	21,658	12,681	34,338	41,183	0.3	0.8	0.5	1.3	1.5
Inter State	2	176	4.2	7,405	0.260	5,614	14,863	8,977	23,841	29,454	1.0	2.6	1.6	4.2	5.2
Inter State	3	467	3.5	4,471	0.160	4,406	8,711	5,565	14,276	18,681	2.1	4.1	2.6	6.7	8.7
Inter State	4	259	3.2	1,803	0.050	3,356	3,492	2,555	6,047	9,402	0.9	0.9	0.7	1.6	2.4
Inter State	5	7	2.6	800	0.030						0.0	0.0	0.0	0.0	0.0
Inter State	Total	946				4,406	8,869	5,613	14,481	18,887	4.2	8.4	5.3	13.7	17.9
Intra State	1	2	5.0	6,545	0.110						0.0	0.0	0.0	0.0	0.0
Intra State	2	84	4.2	2,795	0.100	3,669	5,212	3,218	8,430	12,099	0.3	0.4	0.3	0.7	1.0
Intra State	3	301	3.5	1,165	0.040	3,029	1,897	1,497	3,394	6,422	0.9	0.6	0.5	1.0	1.9
Intra State	4	2,247	3.2	350	0.010	2,706	237	616	854	3,560	6.1	0.5	1.4	1.9	8.0
Intra State	5	1,425	2.6	95	0.000	2,634	-250	547	297	2,931	3.8	0.2	0.2	0.4	4.2
Intra State	Total	4,059				2,723	292	711	1,003	3,726	11.1	1.7	2.3	4.1	15.1
TOTAL		5,005				3,041	1,913	1,637	3,551	6,592	15.2	10.1	7.6	17.8	33.0

Source: Consultant's estimates

Table A.6.6 (continued) AZERBAIJAN - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: **AZERBAIJAN**

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				TOTAL ROAD USE COSTS
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	145	4.9	10,503	0.130	7,707	26,164	15,379	41,543	49,250	1.1	3.8	2.2	6.0	7.1
Inter State	2	1,264	4.0	4,181	0.100	4,430	9,102	5,596	14,699	19,129	5.6	11.5	7.1	18.6	24.2
Inter State	3	0	3.8												
Inter State	4	0	3.5												
Inter State	5	0	2.9												
Inter State	Total	1,409				4,766	10,853	6,600	17,453	22,219	6.7	15.3	9.3	24.6	31.3
Intra State	1	0	4.9												
Intra State	2	550	4.0	2,615	0.080	3,650	5,124	3,234	8,357	12,008	2.0	2.8	1.8	4.6	6.6
Intra State	3	2,033	3.8	1,668	0.050	3,251	3,090	2,095	5,186	8,437	6.6	6.3	4.3	10.5	17.2
Intra State	4	697	3.5	978	0.020	2,997	1,781	1,423	3,204	6,200	2.1	1.2	1.0	2.2	4.3
Intra State	5	0	2.9												
Intra State	Total	3,280				3,264	3,153	2,143	5,296	8,561	10.7	10.3	7.0	17.4	28.1
TOTAL		4,689				3,715	5,466	3,482	8,948	12,664	17.4	25.6	16.3	42.0	59.4

Source: Consultant's estimates

Table A.6.6 ARMENIA - ANALYSIS OF ANNUAL ROAD USE COSTS

Country: **ARMENIA**

Road Class	Design Standard Category	Length (km)	SNC	AADT	ESA per Lane/Year (million)	Average Annual Costs / US\$ Km					Average Annual Costs (US\$ million)				
						Fixed (No Traffic)	Variable Costs			TOTAL COSTS	Fixed Costs	Variable Costs			TOTAL ROAD USE COSTS
							AADT	ESAL	Total			Vehicle Related	Axle Related	Sub Total	
Inter State	1	165	4.5	6,222	0.040	5,718	16,023	9,496	25,519	31,237	0.9	2.6	1.6	4.2	5.2
Inter State	2	789	4.0	2,988	0.050	3,956	6,780	4,207	10,987	14,944	3.1	5.3	3.3	8.7	11.8
Inter State	3	494	3.5	1,410	0.030	3,196	2,787	2,021	4,808	8,005	1.6	1.4	1.0	2.4	4.0
Inter State	4	122	3.0	841	0.020	2,948	1,417	1,392	2,808	5,756	0.4	0.2	0.2	0.3	0.7
Inter State	5	0	2.3								0.0	0.0	0.0	0.0	0.0
Inter State	Total	1,569				3,824	6,080	3,858	9,938	13,763	6.0	9.5	6.1	15.6	21.6
Intra State	1	0	4.5								0.0	0.0	0.0	0.0	0.0
Intra State	2	83	4.0	4,700	0.050	4,884	11,575	7,048	18,624	23,508	0.4	1.0	0.6	1.6	2.0
Intra State	3	150	3.5	1,302	0.010	3,207	2,892	2,079	4,971	8,178	0.5	0.4	0.3	0.7	1.2
Intra State	4	1,045	3.0	525	0.010	2,812	735	985	1,721	4,532	2.9	0.8	1.0	1.8	4.7
Intra State	5	300	2.3	263	0.010	2,706	29	825	854	3,560	0.8	0.0	0.2	0.3	1.1
Intra State	Total	1,579				2,938	1,378	1,379	2,757	5,695	4.6	2.2	2.2	4.4	9.0
TOTAL		3,148				3,380	3,722	2,614	6,337	9,717	10.6	11.7	8.2	19.9	30.6

Source: Consultant's estimates

Table A.6.5 (continued) UZBEKISTAN - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Length (km)	ESA per vehicle and ESAL - Kilometres (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3- axle	Truck >3 axle	
			ESA per vehicle						
			0.0001	0.0014	1.0997	0.193	0.1879	1.0115	
			ESAL-Kilometres (metres)						
M	1	759	0.08	0.44	81.05	106.93	15.58	70.25	274.3
M	2	445	0.05	0.14	40.34	48.84	7.56	40.79	137.7
M	3	130	0.01	0.02	5.23	6.73	1.88	6.03	19.9
M	4	52	0.00	0.00	0.91	1.88	0.80	3.61	7.2
M	5	7	0.00	0.00	0.08	0.14	0.05	0.09	0.4
		1,393	0.14	0.60	127.61	164.52	25.86	120.77	439.5
Rep.	1	995	0.06	0.25	55.53	86.69	11.97	127.92	282.4
Rep.	2	4,542	0.12	0.40	127.28	167.41	33.24	256.24	584.7
Rep.	3	5,950	0.05	0.18	61.49	102.69	33.95	105.19	303.6
Rep.	4	7,462	0.04	0.18	30.09	119.99	49.08	91.95	291.3
Rep.	5	1,483	0.01	0.01	5.49	9.01	3.26	6.06	23.8
		20,432	0.28	1.02	279.88	485.79	131.50	587.37	1,485.8
M + Rep.	1	1,754	0.14	0.69	136.58	193.63	27.55	198.17	556.8
M + Rep.	2	4,987	0.17	0.54	167.62	216.24	40.80	297.03	722.4
M + Rep.	3	6,080	0.06	0.20	66.72	109.42	35.83	111.23	323.5
M + Rep.	4	7,514	0.04	0.18	30.99	121.87	49.88	95.56	298.5
M + Rep.	5	1,490	0.01	0.01	5.58	9.15	3.31	6.15	24.2
		21,825	0.42	1.62	407.49	650.31	157.36	708.14	1,925.4

Road Class	Design Standard	Length (km)	ESA / Lane / Km / Year (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3- axle	Truck >3 axle	
M	1	759	0.00	0.00	0.03	0.04	0.01	0.02	0.09
M	2	445	0.00	0.00	0.05	0.05	0.01	0.05	0.15
M	3	130	0.00	0.00	0.02	0.03	0.01	0.02	0.08
M	4	52	0.00	0.00	0.01	0.02	0.01	0.03	0.07
M	5	7	0.00	0.00	0.01	0.01	0.00	0.01	0.03
		1,393	0.00	0.00	0.11	0.14	0.03	0.13	0.42
Rep.	1	995	0.00	0.00	0.01	0.02	0.00	0.03	0.07
Rep.	2	4,542	0.00	0.00	0.01	0.02	0.00	0.03	0.06
Rep.	3	5,950	0.00	0.00	0.01	0.01	0.00	0.01	0.03
Rep.	4	7,462	0.00	0.00	0.00	0.01	0.00	0.01	0.02
Rep.	5	1,483	0.00	0.00	0.00	0.00	0.00	0.00	0.01
		20,432	0.00	0.00	0.04	0.06	0.01	0.08	0.19
M + Rep.	1	1,754	0.00	0.00	0.04	0.06	0.01	0.06	0.16
M + Rep.	2	4,987	0.00	0.00	0.06	0.07	0.01	0.07	0.22
M + Rep.	3	6,080	0.00	0.00	0.03	0.03	0.01	0.03	0.10
M + Rep.	4	7,514	0.00	0.00	0.01	0.03	0.01	0.04	0.09
M + Rep.	5	1,490	0.00	0.00	0.01	0.01	0.00	0.01	0.03
		21,825	0.00	0.00	0.14	0.20	0.05	0.21	0.61

Table A.6.5 (continued) TAJIKISTAN - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CLASS

Road Class		Road Length (km)	ESAL per Vehicle and ESAL Km (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
			ESAL per vehicle						
			0.0001	0.0014	0.116	0.0686	0.1667	0.6335	
			ESAL Km (million)						
M	1	6.0	0.00	0.00	0.08	0.22	0.11	0.33	0.74
M	2	42.9	0.00	0.01	0.28	0.67	0.62	1.33	2.91
M	3	335.7	0.01	0.02	0.77	2.72	3.79	3.51	10.83
M	4	177.5	0.00	0.01	0.27	0.67	1.70	2.46	5.11
M	5	527.0	0.01	0.01	0.99	2.06	2.18	2.80	8.05
		1,089.1	0.03	0.04	2.38	6.34	8.41	10.43	27.64
A	1	0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A	2	103.1	0.00	0.01	0.16	0.64	0.69	1.61	3.10
A	3	99.7	0.00	0.00	0.09	0.23	0.26	0.59	1.19
A	4	139.8	0.00	0.00	0.04	0.06	0.08	0.12	0.31
A	5	353.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		696.1	0.00	0.01	0.29	0.93	1.03	2.33	4.59
M + A	1	6.0	0.00	0.00	0.08	0.22	0.11	0.33	0.74
M + A	2	146.0	0.01	0.01	0.43	1.31	1.31	2.94	6.01
M + A	3	435.4	0.02	0.02	0.86	2.95	4.06	4.11	12.01
M + A	4	317.3	0.01	0.01	0.31	0.73	1.79	2.58	5.42
M + A	5	880.5	0.01	0.01	0.99	2.06	2.18	2.80	8.05
		1,785.2	0.04	0.05	2.67	7.27	9.45	12.76	32.23
Road Class		Road Length (km)	ESAL / Lane / Km / Year (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	6.0	0.00	0.00	0.00	0.01	0.00	0.01	0.03
M	2	42.9	0.00	0.00	0.00	0.00	0.00	0.01	0.02
M	3	335.7	0.00	0.00	0.00	0.00	0.00	0.00	0.01
M	4	177.5	0.00	0.00	0.00	0.00	0.00	0.00	0.01
M	5	527.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		1,089.1	0.00	0.00	0.01	0.02	0.01	0.03	0.07
A	1	0.0	0.00	0.00	0.00	0.01	0.00	0.01	0.02
A	2	103.1	0.00	0.00	0.00	0.00	0.00	0.01	0.01
A	3	99.7	0.00	0.00	0.00	0.00	0.00	0.00	0.01
A	4	139.8	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A	5	353.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		696.1	0.00	0.00	0.00	0.01	0.01	0.02	0.05
M + A	1	6.0	0.00	0.00	0.00	0.01	0.01	0.03	0.05
M + A	2	146.0	0.00	0.00	0.00	0.01	0.01	0.01	0.03
M + A	3	435.4	0.00	0.00	0.00	0.00	0.00	0.01	0.02
M + A	4	317.3	0.00	0.00	0.00	0.00	0.00	0.00	0.01
M + A	5	880.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		1,785.2	0.00	0.00	0.01	0.03	0.02	0.05	0.11

Table A.6.5 (continued) KYRGYZ REPUBLIC - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Road Length (km)	ESAL Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
			ESAL / Vehicle						
			0.0001	0.0014	0.166	0.0686	0.1667	0.6335	
			ESAL KM (million)						
M	1	12.2	0.00	0.01	0.31	0.37	0.24	0.83	1.76
M	2	209.2	0.03	0.05	4.32	5.53	2.14	5.32	17.39
M	3	137.6	0.00	0.01	0.27	0.62	1.76	3.91	6.57
M	4	388.6	0.00	0.01	0.07	0.55	4.97	6.20	11.81
M	5	0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		747.6	0.04	0.07	4.97	7.07	9.10	16.26	37.52
A	1	0.0	0.02	0.03	2.60	4.10	1.13	4.21	12.08
A	2	187.5	0.02	0.06	3.70	3.19	2.85	10.24	20.06
A	3	885.3	0.01	0.03	0.90	3.31	2.22	7.91	14.38
A	4	1,140.5	0.00	0.00	0.04	0.10	0.07	0.24	0.45
A	5	149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		2,362.3	0.05	0.12	7.24	10.70	6.28	22.59	46.98
M+A	1	12.2	0.02	0.04	2.92	4.46	1.37	5.03	13.84
M+A	2	396.7	0.06	0.10	8.02	8.72	4.99	15.56	37.45
M+A	3	1,022.9	0.01	0.04	1.17	3.93	3.98	11.82	20.95
M+A	4	1,529.1	0.00	0.01	0.11	0.66	5.04	6.44	12.26
M+A	5	149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		3,109.9	0.09	0.19	12.21	17.77	15.38	38.86	84.50

Road Class	Design Standard	Road Length (km)	ESAL / Km / Lane / Year (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	12.2	0.00	0.00	0.01	0.01	0.00	0.02	0.04
M	2	209.2	0.00	0.00	0.01	0.01	0.01	0.01	0.04
M	3	137.6	0.00	0.00	0.00	0.00	0.01	0.01	0.02
M	4	388.6	0.00	0.00	0.00	0.00	0.01	0.01	0.02
M	5	0.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		747.6	0.00	0.00	0.02	0.02	0.02	0.05	0.12
A	1	0.0	0.00	0.00	0.00	0.01	0.00	0.01	0.02
A	2	187.5	0.00	0.00	0.00	0.00	0.00	0.01	0.01
A	3	885.3	0.00	0.00	0.00	0.00	0.00	0.00	0.01
A	4	1,140.5	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A	5	149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		2,362.3	0.00	0.00	0.01	0.01	0.00	0.02	0.04
M+A	1	12.2	0.00	0.00	0.01	0.01	0.01	0.02	0.05
M+A	2	396.7	0.00	0.00	0.01	0.02	0.01	0.02	0.05
M+A	3	1,022.9	0.00	0.00	0.00	0.00	0.01	0.02	0.03
M+A	4	1,529.1	0.00	0.00	0.00	0.00	0.01	0.01	0.02
M+A	5	149.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		3,109.9	0.00	0.00	0.02	0.03	0.03	0.07	0.15

Table A.6.5 (continued) KAZAKHSTAN - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CLASS

Road Class and Design Category	Design Category	Road length (km)	ESAL / Vehicle and ESAL - Kilometres (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Trucks			
						2-axle	3-axle	> 3-axle	
			ESA / Vehicle						
			0.0001	0.0014	0.2481	0.0453	0.1814	0.2148	
			ESAL - Kilometres (million)						
M	1	272	0.02	0.04	2.38	2.29	5.09	2.30	12.12
M	2	1,634	0.10	0.09	2.16	10.08	30.31	5.31	48.04
M	3	4,037	0.13	0.15	6.29	23.37	50.55	11.87	92.36
M	4	189	0.01	0.01	0.27	0.99	2.13	0.50	3.90
M	5	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		6,132	0.26	0.27	11.09	36.72	88.08	19.98	156.41
A	1	320	0.03	0.04	2.34	2.29	7.20	1.22	13.12
A	2	997	0.04	0.05	1.77	4.90	10.13	3.83	20.72
A	3	6,240	0.18	0.25	8.79	24.35	50.37	19.04	102.99
A	4	62	0.00	0.00	0.04	0.19	0.20	0.16	0.60
A	5	43	0.00	0.00	0.03	0.13	0.14	0.11	0.41
		7,662	0.26	0.34	12.97	31.87	68.04	24.35	137.83
Other Republican	1	41	0.00	0.01	0.33	0.38	0.43	0.27	1.42
Other Republican	2	422	0.03	0.02	0.71	2.82	8.93	2.62	15.12
Other Republican	3	3,028	0.08	0.08	1.91	8.96	20.25	21.77	53.06
Other Republican	4	211	0.00	0.01	0.08	0.63	1.95	0.56	3.23
Other Republican	5	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		3,702	0.11	0.11	3.03	12.79	31.56	25.23	72.83
TOTAL NON-LOCAL	1	633	0.06	0.08	5.05	4.96	12.71	3.79	26.65
TOTAL NON-LOCAL	2	3,053	0.16	0.15	4.64	17.80	49.37	11.76	83.87
TOTAL NON-LOCAL	3	13,305	0.40	0.47	16.99	56.69	121.17	52.68	248.40
TOTAL NON-LOCAL	4	462	0.01	0.02	0.38	1.81	4.29	1.22	7.72
TOTAL NON-LOCAL	5	43	0.00	0.00	0.03	0.13	0.14	0.11	0.41
		17,496	0.63	0.72	27.09	81.38	187.68	69.56	367.07

Road Class and Design Category	Design Category	Road length (km)	ESAL / Lane / Km / Year (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Trucks			
						2-axle	3-axle	> 3-axle	
M	1	272	0.00	0.00	0.00	0.00	0.00	0.00	0.01
M	2	1,634	0.00	0.00	0.00	0.00	0.01	0.00	0.01
M	3	4,037	0.00	0.00	0.00	0.00	0.01	0.00	0.01
M	4	189	0.00	0.00	0.00	0.00	0.01	0.00	0.01
M	5	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		6,132	0.00	0.00	0.00	0.01	0.03	0.01	0.05
A	1	320	0.00	0.00	0.00	0.00	0.01	0.00	0.01
A	2	997	0.00	0.00	0.00	0.00	0.01	0.00	0.01
A	3	6,240	0.00	0.00	0.00	0.00	0.00	0.00	0.01
A	4	62	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A	5	43	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		7,662	0.00	0.00	0.00	0.01	0.02	0.01	0.04
Other Republican	1	41	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Other Republican	2	422	0.00	0.00	0.00	0.00	0.01	0.00	0.02
Other Republican	3	3,028	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Other Republican	4	211	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Other Republican	5	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		3,702	0.00	0.00	0.00	0.01	0.02	0.01	0.05
TOTAL NON-LOCAL	1	633	0.00	0.00	0.01	0.01	0.01	0.00	0.03
TOTAL NON-LOCAL	2	3,053	0.00	0.00	0.00	0.01	0.02	0.01	0.04
TOTAL NON-LOCAL	3	13,305	0.00	0.00	0.00	0.01	0.01	0.01	0.03
TOTAL NON-LOCAL	4	462	0.00	0.00	0.00	0.01	0.01	0.00	0.02
TOTAL NON-LOCAL	5	43	0.00	0.00	0.00	0.00	0.00	0.00	0.01
		17,496	0.00	0.00	0.01	0.03	0.07	0.02	0.13

Table A.6.5 (continued) GEORGIA - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Total Length (km)	ESA per Vehicle and ESAL - Km (million) By Vehicle Category, 1996						TOTAL
			Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
			ESA per vehicle						
			0.0001	0.0014	2.0001	0.0974	0.5004	1.1296	
			ESAL / Km (million)						
S	1	37	0.01	0.01	19.04	0.45	2.38	1.79	23.67
S	2	176	0.04	0.03	72.65	1.84	9.41	7.35	91.31
S	3	467	0.06	0.04	116.45	3.45	16.48	15.77	152.26
S	4	259	0.01	0.01	18.21	0.89	3.90	5.35	28.38
S	5	7	0.00	0.00	0.30	0.01	0.04	0.03	0.38
		946	0.12	0.08	226.66	6.64	32.22	30.29	296.01
Rep.	1	2	0.00	0.00	0.81	0.02	0.10	0.08	1.01
Rep.	2	84	0.01	0.00	13.01	0.33	1.69	1.32	16.35
Rep.	3	301	0.01	0.01	19.56	0.58	2.77	2.65	25.58
Rep.	4	2,247	0.02	0.01	30.68	1.51	6.58	9.02	47.81
Rep.	5	1,425	0.00	0.00	7.31	0.18	0.95	0.72	9.17
		4,059	0.04	0.03	71.38	2.61	12.09	13.78	99.92
S + Rep.	1	39	0.01	0.01	19.85	0.46	2.48	1.87	24.68
S + Rep.	2	260	0.04	0.03	85.66	2.16	11.10	8.67	107.66
S + Rep.	3	768	0.07	0.05	136.02	4.03	19.25	18.41	177.83
S + Rep.	4	2,506	0.04	0.02	48.89	2.40	10.48	14.37	76.20
S + Rep.	5	1,432	0.00	0.00	7.62	0.19	0.99	0.75	9.55
		5,005	0.16	0.11	298.04	9.25	44.30	44.07	395.93
Road Class	Design Standard	Total Length (km)	ESAL / Lane / Km / Year (million)						TOTAL
			Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
S	1	37	0.00	0.00	0.13	0.00	0.02	0.01	0.16
S	2	176	0.00	0.00	0.21	0.01	0.03	0.02	0.26
S	3	467	0.00	0.00	0.12	0.00	0.02	0.02	0.16
S	4	259	0.00	0.00	0.04	0.00	0.01	0.01	0.05
S	5	7	0.00	0.00	0.02	0.00	0.00	0.00	0.03
		946	0.00	0.00	0.52	0.01	0.07	0.06	0.66
Rep.	1	2	0.00	0.00	0.09	0.00	0.01	0.01	0.11
Rep.	2	84	0.00	0.00	0.08	0.00	0.01	0.01	0.10
Rep.	3	301	0.00	0.00	0.03	0.00	0.00	0.00	0.04
Rep.	4	2,247	0.00	0.00	0.01	0.00	0.00	0.00	0.01
Rep.	5	1,425	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		4,059	0.00	0.00	0.21	0.01	0.03	0.02	0.27
S + Rep.	1	39	0.00	0.00	0.22	0.01	0.03	0.02	0.27
S + Rep.	2	260	0.00	0.00	0.28	0.01	0.04	0.03	0.36
S + Rep.	3	768	0.00	0.00	0.16	0.00	0.02	0.02	0.21
S + Rep.	4	2,506	0.00	0.00	0.04	0.00	0.01	0.01	0.07
S + Rep.	5	1,432	0.00	0.00	0.02	0.00	0.00	0.00	0.03
		5,005	0.00	0.00	0.73	0.02	0.10	0.09	0.93

Table A.6.5 (continued) AZERBAIJAN - EQUIVALENT STANDARD AXLE KILOMETRES BY DESIGN CATEGORY

Road Class	Design Standard	Road Length (km)	ESAL- km (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
			ESA per Vehicle						
			0.0001	0.0014	1.2341	0.1272	0.1792	0.3384	
M	1	144.5	0.03	0.07	47.97	13.30	3.18	11.28	75.83
M	2	1,072.5	0.06	0.28	107.25	46.51	15.08	31.66	200.84
M	2-3	192.0	0.03	0.04	21.88	6.48	1.27	10.98	40.68
M	3	-							
M	3-4	-							
M	4	-							
M	4-5	-							
M	5	-							
		1,409.0	0.13	0.39	177.10	66.29	19.53	53.92	317.35
Rep.	1	-							
Rep.	2	253.0	0.01	0.05	21.31	7.26	3.01	5.81	37.45
Rep.	2-3	297.0	0.01	0.08	25.02	11.56	4.49	9.76	50.91
Rep.	3	1,159.0	0.03	0.17	65.78	26.64	10.99	23.62	127.22
Rep.	3-4	874.0	0.02	0.11	39.76	17.85	6.17	11.55	75.47
Rep.	4	371.0	0.01	0.03	10.36	4.84	2.18	3.90	21.32
Rep.	4-5	326.0	0.00	0.01	2.06	0.88	0.34	0.93	4.21
Rep.	5	-							
		3,280.0	0.07	0.46	164.29	69.02	27.19	55.56	316.59
M+Rep.	1	144.5	0.03	0.07	47.97	13.30	3.18	11.28	75.83
M+Rep.	2	1,325.5	0.07	0.33	128.56	53.77	18.09	37.47	238.30
M+Rep.	2-3	489.0	0.04	0.12	46.90	18.04	5.76	20.74	91.59
M+Rep.	3	1,159.0	0.03	0.17	65.78	26.64	10.99	23.62	127.22
M+Rep.	3-4	874.0	0.02	0.11	39.76	17.85	6.17	11.55	75.47
M+Rep.	4	371.0	0.01	0.03	10.36	4.84	2.18	3.90	21.32
M+Rep.	4-5	326.0	0.00	0.01	2.06	0.88	0.34	0.93	4.21
M+Rep.	5	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		4,689.0	0.20	0.85	341.39	135.31	46.72	109.48	633.94
Road Class	Design Standard	Road Length (km)	ESA / Lane / Km / Year (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	144.5	0.00	0.00	0.08	0.02	0.01	0.02	0.13
M	2	1,072.5	0.00	0.00	0.05	0.02	0.01	0.01	0.09
M	2-3	192.0	0.00	0.00	0.06	0.02	0.00	0.03	0.11
M	3	-							
M	3-4	-							
M	4	-							
M	4-5	-							
M	5	-							
		1,409.0	0.00	0.00	0.19	0.06	0.02	0.06	0.33
Rep.	1	-							
Rep.	2	253.0	0.00	0.00	0.04	0.01	0.01	0.01	0.07
Rep.	2-3	297.0	0.00	0.00	0.04	0.02	0.01	0.02	0.09
Rep.	3	1,159.0	0.00	0.00	0.03	0.01	0.00	0.01	0.05
Rep.	3-4	874.0	0.00	0.00	0.02	0.01	0.00	0.01	0.04
Rep.	4	371.0	0.00	0.00	0.01	0.01	0.00	0.01	0.03
Rep.	4-5	326.0	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Rep.	5	-							
		3,280.0	0.00	0.00	0.15	0.06	0.03	0.05	0.29
M+Rep.	1	144.5	0.00	0.00	0.08	0.02	0.01	0.02	0.13
M+Rep.	2	1,325.5	0.00	0.00	0.09	0.04	0.01	0.03	0.17
M+Rep.	2-3	489.0	0.00	0.00	0.10	0.04	0.01	0.05	0.19
M+Rep.	3	1,159.0	0.00	0.00	0.03	0.01	0.00	0.01	0.05
M+Rep.	3-4	874.0	0.00	0.00	0.02	0.01	0.00	0.01	0.04
M+Rep.	4	371.0	0.00	0.00	0.01	0.01	0.00	0.01	0.03
M+Rep.	4-5	326.0	0.00	0.00	0.00	0.00	0.00	0.00	0.01
M+Rep.	5	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		4,689.0	0.00	0.00	0.34	0.12	0.04	0.11	0.62

Source: Consultant's estimate based on axle load survey results and Azeravtoyol data.

Table A.6.5 ARMENIA - EQUIVALENT STANDARD AXLE KILOMETRES BY ROAD DESIGN CATEGORY

Road Class	Design Standard	Road Length (km)	ESAL km (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
			ESA per Vehicle						
			0.0001	0.0014	0.6348	0.1616	0.4073	0.3566	
			ESAL - Kilometres (million)						
M	1	165.1	0.03	0.04	14.10	3.55	8.12	1.13	26.97
M	2	788.7	0.06	0.10	33.00	9.89	23.86	4.91	71.81
M	3	493.7	0.02	0.04	8.92	4.40	10.20	1.74	25.31
M	4	121.6	0.00	0.01	1.16	1.12	1.87	0.59	4.76
M	5	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		1,569.1	0.11	0.18	57.19	18.96	44.06	8.36	128.86
Rep.	1	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rep.	2	83.3	0.01	0.01	3.44	1.24	3.09	0.28	8.08
Rep.	3	150.0	0.01	0.01	1.51	0.82	0.86	0.25	3.45
Rep.	4	1,045.4	0.01	0.04	5.02	4.58	9.44	2.48	21.57
Rep.	5	300.0	0.00	0.01	0.72	0.66	1.35	0.36	3.10
		1,578.7	0.03	0.07	10.69	7.30	14.75	3.36	36.19
M + Rep.	1	165.1	0.03	0.04	14.10	3.55	8.12	1.13	26.97
M + Rep.	2	872.0	0.07	0.11	36.44	11.13	26.95	5.18	79.89
M + Rep.	3	643.7	0.02	0.05	10.43	5.22	11.06	1.98	28.76
M + Rep.	4	1,167.0	0.01	0.04	6.19	5.70	11.32	3.07	26.33
M + Rep.	5	300.0	0.00	0.01	0.72	0.66	1.35	0.36	3.10
		3,147.8	0.13	0.25	67.88	26.25	58.81	11.72	165.05
Road Class	Design Standard	Road Length (km)	ESA / lane / km / Year (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	165.1	0.00	0.00	0.02	0.01	0.01	0.00	0.04
M	2	788.7	0.00	0.00	0.02	0.01	0.02	0.00	0.05
M	3	493.7	0.00	0.00	0.01	0.00	0.01	0.00	0.03
M	4	121.6	0.00	0.00	0.00	0.00	0.01	0.00	0.02
M	5	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
		1,569.1	0.00	0.00	0.06	0.02	0.05	0.01	0.13
Rep.	1	-	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rep.	2	83.3	0.00	0.00	0.02	0.01	0.02	0.00	0.05
Rep.	3	150.0	0.00	0.00	0.01	0.00	0.00	0.00	0.01
Rep.	4	1,045.4	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Rep.	5	300.0	0.00	0.00	0.00	0.00	0.00	0.00	0.01
		1,578.7	0.00	0.00	0.03	0.01	0.03	0.00	0.08
M + Rep.	1	165.1	0.00	0.00	0.02	0.01	0.01	0.00	0.04
M + Rep.	2	872.0	0.00	0.00	0.04	0.01	0.03	0.00	0.09
M + Rep.	3	643.7	0.00	0.00	0.01	0.01	0.01	0.00	0.04
M + Rep.	4	1,167.0	0.00	0.00	0.01	0.01	0.01	0.00	0.03
M + Rep.	5	300.0	0.00	0.00	0.00	0.00	0.00	0.00	0.01
		3,147.8	0.00	0.00	0.09	0.03	0.07	0.01	0.21

Source: Consultant's estimates

Table A.6.4 (continued) UZBEKISTAN - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Length (km)	AVERAGE DAILY TRAFFIC						TOTAL
			Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3- axle	Truck >3 axle	
M	1	759	3,010	1,145	266	2,000	299	251	6,971
M	2	445	3,014	614	226	1,558	248	248	5,907
M	3	130	1,518	250	100	735	211	126	2,941
M	4	52	1,042	91	43	513	223	188	2,101
M	5	7	500	29	30	282	105	36	982
		1,393							
Rep.	1	995	1,605	489	139	1,237	175	348	3,994
Rep.	2	4,542	738	173	70	523	107	153	1,764
Rep.	3	5,950	220	60	26	245	83	48	682
Rep.	4	7,462	151	46	10	228	96	33	565
Rep.	5	1,483	153	9	9	86	32	11	300
		20,432							

Road Class	Design Standard	Length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3- axle	Truck >3 axle	
M	1	759	834.0	317.1	73.7	554.1	82.9	69.5	1,931.2
M	2	445	489.5	99.7	36.7	253.0	40.2	40.3	959.5
M	3	130	72.0	11.9	4.8	34.9	10.0	6.0	139.5
M	4	52	19.8	1.7	0.8	9.7	4.2	3.6	39.9
M	5	7	1.3	0.1	0.1	0.7	0.3	0.1	2.5
		1,393	1,416.6	430.5	116.0	852.4	137.6	119.4	3,072.6
Rep.	1	995	582.8	177.7	50.5	449.2	63.7	126.5	1,450.4
Rep.	2	4,542	1,223.3	287.1	115.7	867.4	176.9	253.3	2,923.8
Rep.	3	5,950	478.4	131.0	55.9	532.1	180.7	104.0	1,482.0
Rep.	4	7,462	410.5	126.5	27.4	621.7	261.2	90.9	1,538.1
Rep.	5	1,483	82.6	4.7	5.0	46.7	17.3	6.0	162.4
		20,432	2,777.6	727.0	254.5	2,517.1	699.9	580.7	7,556.6
M + Rep.	1	1,754	1,416.8	494.8	124.2	1,003.3	146.6	195.9	3,381.5
M + Rep.	2	4,987	1,712.8	386.8	152.4	1,120.4	217.1	293.7	3,883.2
M + Rep.	3	6,080	550.4	142.8	60.7	566.9	190.7	110.0	1,621.5
M + Rep.	4	7,514	430.2	128.2	28.2	631.5	265.5	94.5	1,578.0
M + Rep.	5	1,490	83.9	4.8	5.1	47.4	17.6	6.1	164.9
		21,825	4,194.1	1,157.5	370.5	3,369.5	837.5	700.1	10,629.2

Source: Consultant's estimate based on Uzavtoyul data

Table A.6.4 (continued) TAJIKISTAN - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Road Length (km)	Average Daily Traffic (TRACECA average)						TOTAL AADT
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	6.0	3,539	854	307	1,461	305	236	6,702
M	2	42.9	2,172	301	152	620	239	134	3,618
M	3	335.7	1,138	94	54	324	186	45	1,840
M	4	177.5	714	67	36	151	158	60	1,186
M	5	527.0	572	28	45	156	68	23	891
		1,089.1							
A	1	0.0	2,185	375	115	897	237	221	4,031
A	2	103.1	1,187	201	84	475	173	113	2,233
A	3	99.7	728	105	36	249	110	68	1,294
A	4	139.8	303	53	22	93	44	26	540
A	5	353.5	95	10	7	16	10	4	142
		696.1							
Road Class	Design Standard	Road Length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	6.0	7.8	1.9	0.7	3.2	0.7	0.5	14.7
M	2	42.9	34.0	4.7	2.4	9.7	3.7	2.1	56.7
M	3	335.7	139.4	11.5	6.6	39.7	22.8	5.5	225.5
M	4	177.5	46.3	4.3	2.3	9.8	10.2	3.9	76.8
M	5	527.0	109.9	5.4	8.6	30.0	13.1	4.4	171.4
		1,089.1	337.4	27.8	20.5	92.4	50.5	16.5	545.0
A	1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
A	2	103.1	27.4	3.9	1.3	9.4	4.1	2.5	48.7
A	3	99.7	11.0	1.9	0.8	3.4	1.6	0.9	19.6
A	4	139.8	4.8	0.5	0.4	0.8	0.5	0.2	7.2
A	5	353.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		696.1	43.2	6.4	2.5	13.5	6.2	3.7	75.6
M + A	1	6.0	7.8	1.9	0.7	3.2	0.7	0.5	14.7
M + A	2	146.0	61.4	8.7	3.7	19.1	7.9	4.6	105.3
M + A	3	435.4	150.4	13.4	7.4	43.1	24.3	6.5	245.1
M + A	4	317.3	51.1	4.8	2.7	10.6	10.7	4.1	84.1
M + A	5	880.5	109.9	5.4	8.6	30.0	13.1	4.4	171.4
		1,785.2	380.6	34.2	23.1	105.9	56.7	20.1	620.6

Source: Consultant's estimate

Table A.6.4 (continued) KYRGYZ REPUBLIC - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Road Length (km)	Average Daily Traffic						TOTAL AADT
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	12.2	7,063	950	426	1,197	322	294	10,252
M	2	209.2	4,090	431	341	1,055	168	110	6,195
M	3	137.6	878	119	32	180	210	123	1,543
M	4	388.6	252	61	3	57	210	69	651
M	5	0.0							
A	1	0.0							
A	2	187.5	2,339	316	229	873	99	97	3,953
A	3	885.3	749	122	69	144	53	50	1,187
A	4	1,140.5	137	53	13	116	32	30	381
A	5	149.0	32	7	4	27	8	7	85
			Vehicle Kilometres (million)						
Road Class	Design Standard	Road Length (km)	Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	TOTAL
M	1	12.2	31.5	4.2	1.9	5.3	1.4	1.3	45.7
M	2	209.2	312.3	32.9	26.0	80.6	12.8	8.4	473.0
M	3	137.6	44.1	6.0	1.6	9.0	10.5	6.2	77.4
M	4	388.6	35.7	8.7	0.4	8.1	29.8	9.8	92.5
M	5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
M		747.6	423.6	51.8	30.0	103.0	54.6	25.7	688.6
A	1	0.0	160.1	21.6	15.7	59.7	6.8	6.6	270.5
A	2	187.5	242.0	39.4	22.3	46.5	17.1	16.2	383.6
A	3	885.3	57.0	22.1	5.4	48.3	13.3	12.5	158.6
A	4	1,140.5	1.7	0.4	0.2	1.5	0.4	0.4	4.6
A	5	149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
A		2,362.3	460.9	83.5	43.6	156.0	37.7	35.7	817.3
M+A	1	12.2	191.5	25.9	17.6	65.1	8.2	7.9	316.2
M+A	2	396.7	554.3	72.3	48.3	127.1	30.0	24.6	856.6
M+A	3	1,022.9	101.1	28.0	7.0	57.3	23.9	18.7	236.0
M+A	4	1,529.1	37.5	9.0	0.6	9.6	30.2	10.2	97.1
M+A	5	149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
M+A		3,109.9	884.5	135.3	73.6	259.0	92.3	61.3	1,505.9

Table A.6.4 (continued) KAZAKHSTAN - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Category	Road length (km)	Average Daily Traffic						TOTAL
			Car	Utility Vehicle	Large Bus	Trucks			
						2-axle	3-axle	>3-axle	
M	1	272	2,464	256	97	509	282	108	3,717
M	2	1,634	1,625	102	15	373	280	41	2,436
M	3	4,037	899	70	17	350	189	38	1,563
M	4	189	810	63	15	316	170	34	1,409
M	5	0							
		6,132							
A	1	320	2,919	222	81	433	340	49	4043
A	2	997	1,016	98	20	297	154	49	1633
A	3	6,240	807	78	16	236	122	39	1297
A	4	62	443	51	7	189	49	32	772
A	5	43	443	51	7	189	49	32	772
		7,662							
Other Republican	1	41	3,105	246	89	560	157	85	4242
Other Republican	2	422	1,732	87	18	404	320	79	2641
Other Republican	3	3,028	730	52	7	179	101	92	1161
Other Republican	4	211	383	80	4	181	140	34	821
Other Republican	5	0	248	52	3	117	91	22	533
		3,702							

Road Class and Design Category	Design Category	Road length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility Vehicle	Large Bus	Trucks			
						2-axle	3-axle	>3-axle	
M	1	272	244.7	25.5	9.6	50.5	28.0	10.7	369.0
M	2	1,634	969.1	61.0	8.7	222.5	167.1	24.7	1,453.0
M	3	4,037	1,324.3	103.6	25.3	515.9	278.7	55.3	2,303.1
M	4	189	55.9	4.4	1.1	21.8	11.8	2.3	97.2
M	5	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		6,132	2,593.9	194.5	44.7	810.7	485.6	93.0	4,222.3
A	1	320	340.9	26.0	9.4	50.5	39.7	5.7	472.2
A	2	997	369.6	35.7	7.1	108.2	55.9	17.8	594.3
A	3	6,240	1,837.4	177.2	35.4	537.6	277.7	88.6	2,954.0
A	4	62	10.0	1.2	0.2	4.3	1.1	0.7	17.5
A	5	43	7.0	0.8	0.1	3.0	0.8	0.5	12.1
		7,662	2,565.0	240.8	52.3	703.6	375.1	113.4	4,050.1
Other Republican	1	41	46.5	3.7	1.3	8.4	2.3	1.3	63.5
Other Republican	2	422	266.9	13.4	2.8	62.2	49.2	12.2	406.8
Other Republican	3	3,028	807.1	57.7	7.7	197.8	111.6	101.4	1,283.4
Other Republican	4	211	29.5	6.2	0.3	13.9	10.7	2.6	63.2
Other Republican	5	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		3,702	1,149.9	81.0	12.2	282.4	174.0	117.4	1,816.9
TOTAL NON-LOCAL	1	633	632.1	55.1	20.4	109.4	70.1	17.7	904.7
TOTAL NON-LOCAL	2	3,053	1,605.5	110.1	18.7	392.8	272.2	54.7	2,454.1
TOTAL NON-LOCAL	3	13,305	3,968.8	338.6	68.5	1,251.4	668.0	245.3	6,540.5
TOTAL NON-LOCAL	4	462	95.4	11.7	1.5	40.0	23.6	5.7	177.9
TOTAL NON-LOCAL	5	43	7.0	0.8	0.1	3.0	0.8	0.5	12.1
		17,496	6,308.8	516.4	109.2	1,796.6	1,034.6	323.8	10,089.3

Source: Consultant's estimate based on Kazdornii data.

Table A.6.4 (continued) GEORGIA - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Total Length (km)	Average Daily Traffic 1996						TOTAL
			Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
S	1	37	7,285	316	705	338	352	118	9,114
S	2	176	5,872	280	565	293	293	101	7,405
S	3	467	3,469	177	342	208	193	82	4,471
S	4	259	1,415	62	96	97	83	50	1,803
S	5	7	643	27	59	30	31	10	800
		946							
Rep.	1	2	5,232	227	506	243	253	84	6,545
Rep.	2	84	2,216	106	213	111	111	38	2,795
Rep.	3	301	904	46	89	54	50	21	1,165
Rep.	4	2,247	275	12	19	19	16	10	350
Rep.	5	1,425	76	3	7	4	4	1	95
		4,059							
Road Class	Design Standard	Total Length (km)	Vehicle-Km (million) By Vehicle Category, 1996						TOTAL
			Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
S	1	37	98.4	4.3	9.5	4.6	4.8	1.6	123.1
S	2	176	377.2	18.0	36.3	18.9	18.8	6.5	475.7
S	3	467	591.4	30.2	58.2	35.5	32.9	14.0	762.1
S	4	259	133.8	5.8	9.1	9.2	7.8	4.7	170.4
S	5	7	1.6	0.1	0.2	0.1	0.1	0.0	2.0
		946	1,202.4	58.4	113.3	68.1	64.4	26.8	1,533.4
Rep.	1	2	4.2	0.2	0.4	0.2	0.2	0.1	5.3
Rep.	2	84	67.5	3.2	6.5	3.4	3.4	1.2	85.2
Rep.	3	301	99.3	5.1	9.8	6.0	5.5	2.3	128.0
Rep.	4	2,247	225.3	9.8	15.3	15.5	13.1	8.0	287.1
Rep.	5	1,425	39.7	1.7	3.7	1.8	1.9	0.6	49.4
		4,059	436.1	20.0	35.7	26.8	24.2	12.2	555.0
S + Rep.	1	39	102.6	4.4	9.9	4.8	5.0	1.7	128.3
S + Rep.	2	260	444.8	21.2	42.8	22.2	22.2	7.7	560.9
S + Rep.	3	768	690.7	35.3	68.0	41.4	38.5	16.3	890.2
S + Rep.	4	2,506	359.1	15.7	24.4	24.6	20.9	12.7	457.5
S + Rep.	5	1,432	41.4	1.7	3.8	1.9	2.0	0.7	51.5
		5,005	1,638.5	78.4	149.0	94.9	88.5	39.0	2,088.4

Source: Consultant's estimate based on Sakavtogsa data

Table A.6.4 (continued) AZERBAIJAN - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS

Road Class	Design Standard	Road Length (km)	Average Daily Traffic						TOTAL ADT
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	144.5	5,842	1,010	737	1,982	336	632	10,539
M	2	1,072.5	1,605	509	222	934	215	239	3,724
M	2-3	192.0	4,802	380	253	727	101	463	6,726
M	3	-							
M	3-4	-							
M	4	-							
M	4-5	-							
M	5	-							
		1,409.0							
Rep.	1	-							
Rep.	2	253.0	658	418	187	618	182	186	2,249
Rep.	2-3	297.0	883	522	187	838	231	266	2,927
Rep.	3	1,159.0	594	286	126	495	145	165	1,811
Rep.	3-4	874.0	475	249	101	440	108	107	1,480
Rep.	4	371.0	754	175	62	281	90	85	1,447
Rep.	4-5	326.0	278	55	14	58	16	23	444
Rep.	5	-							
		3,280.0							
		4,689.0							

Road Class	Design Standard	Road Length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	144.5	308.1	53.3	38.9	104.5	17.7	33.3	555.9
M	2	1,072.5	628.3	199.3	86.9	365.6	84.2	93.6	1,457.8
M	2-3	192.0	336.5	26.6	17.7	50.9	7.1	32.4	471.4
M	3	-							
M	3-4	-							
M	4	-							
M	4-5	-							
M	5	-							
		1,409.0	1,272.9	279.2	143.5	521.1	109.0	159.3	2,485.0
Rep.	1	-							
Rep.	2	253.0	60.8	38.6	17.3	57.1	16.8	17.2	207.7
Rep.	2-3	297.0	95.7	56.6	20.3	90.8	25.0	28.8	317.3
Rep.	3	1,159.0	251.3	121.0	53.3	209.4	61.3	69.8	766.1
Rep.	3-4	874.0	151.5	79.4	32.2	140.4	34.5	34.1	472.1
Rep.	4	371.0	102.1	23.7	8.4	38.1	12.2	11.5	195.9
Rep.	4-5	326.0	33.1	6.5	1.7	6.9	1.9	2.7	52.8
Rep.	5	-							
		3,280.0	694.5	325.9	133.1	542.6	151.7	164.2	2,012.0
M+Rep.	1	144.5	308.1	53.3	38.9	104.5	17.7	33.3	555.9
M+Rep.	2	1,325.5	689.1	237.9	104.2	422.7	101.0	110.7	1,665.5
M+Rep.	2-3	489.0	432.2	83.2	38.0	141.8	32.1	61.3	788.7
M+Rep.	3	1,159.0	251.3	121.0	53.3	209.4	61.3	69.8	766.1
M+Rep.	3-4	874.0	151.5	79.4	32.2	140.4	34.5	34.1	472.1
M+Rep.	4	371.0	102.1	23.7	8.4	38.1	12.2	11.5	195.9
M+Rep.	4-5	326.0	33.1	6.5	1.7	6.9	1.9	2.7	52.8
M+Rep.	5	-							
		4,689.0	1,967.4	605.0	276.6	1,063.7	260.7	323.5	4,497.0

Note: Republican (Rep.) roads exclude those in the occupied areas.

Source: Consultant's estimate based on Azeravtoyol data.

Table A.6.4 ARMENIA - AVERAGE DAILY TRAFFIC AND VEHICLE KILOMETRES BY DESIGN CLASS 1996

Road Class	Design Standard	Road Length (km)	Average Daily Traffic						TOTAL ADT
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	165.1	4,628	477	369	364	331	53	6,222
M	2	788.7	2,106	237	181	213	204	48	2,988
M	3	493.7	856	159	78	151	139	27	1,410
M	4	121.6	410	92	41	157	104	37	841
M	5	-							
		1,569.1							
Rep.	1	-							
Rep.	2	83.3	3,681	312	178	253	250	25	4,700
Rep.	3	150.0	970	145	43	92	39	13	1,302
Rep.	4	1,045.4	285	67	21	74	61	18	525
Rep.	5	300.0	142	33	10	37	30	9	263
		1,578.7							
Road Class	Design Standard	Road Length (km)	Vehicle Kilometres (million)						TOTAL
			Car	Utility	Bus	Truck 2-axle	Truck 3-axle	Truck >3-axle	
M	1	165.1	278.9	28.7	22.2	22.0	19.9	3.2	374.9
M	2	788.7	606.3	68.3	52.0	61.2	58.6	13.8	860.1
M	3	493.7	154.3	28.7	14.1	27.2	25.0	4.9	254.1
M	4	121.6	18.2	4.1	1.8	7.0	4.6	1.7	37.3
M	5	-	-	-	-	-	-	-	-
		1,569.1	1,057.7	129.8	90.1	117.3	108.2	23.5	1,526.5
Rep.	1	-	0.0	0.0	0.0	0.0	0.0	0.0	-
Rep.	2	83.3	111.9	9.5	5.4	7.7	7.6	0.8	142.9
Rep.	3	150.0	53.1	7.9	2.4	5.1	2.1	0.7	71.3
Rep.	4	1,045.4	108.6	25.4	7.9	28.3	23.2	7.0	200.4
Rep.	5	300.0	15.6	3.6	1.1	4.1	3.3	1.0	28.8
		1,578.7	289.2	46.5	16.8	45.2	36.2	9.4	443.3
M + Rep.	1	165.1	278.9	28.7	22.2	22.0	19.9	3.2	374.9
M + Rep.	2	872.0	718.2	77.8	57.4	68.9	66.2	14.5	1,003.0
M + Rep.	3	643.7	207.4	36.6	16.4	32.3	27.2	5.6	325.4
M + Rep.	4	1,167.0	126.8	29.5	9.7	35.3	27.8	8.6	237.7
M + Rep.	5	300.0	15.6	3.6	1.1	4.1	3.3	1.0	28.8
		3,147.8	1,346.9	176.2	106.9	162.5	144.4	32.9	1,969.8

Table A.6.3 ARMENIA - ANALYSIS OF BENKELMAN SURVEY RESULTS

Road No.	Road Location	Benkelman Beam Survey		Design Class	Statistical Results (SNC - Modified Structural Number)						
		Km from	Km to		No. of Observations	Mean SNC	Median SNC	Standard Deviation SNC	Coefficient of Variation (%)	95% Confidence Limits for Mean SNC	
										Upper	Lower
M.1	Yerevan - Ashtarak	0.00	13.00	1	131	7.50	7.50	0.80	10.67	7.60	7.40
M.1	Ashtarak - Giumri	30.20	119.20	2	903	4.92	4.96	0.58	11.79	4.96	4.88
M.1	Giumri - Bavra	0.00	43.70	2	438	4.78	4.72	0.45	9.41	4.82	4.74
M.2	Ashtarak - Spitak	0.00	77.10	2	772	5.32	4.89	0.90	16.92	5.38	5.26
M.4	Yeghegnadzor - Goris	165.00	201.00	2	361	4.12	4.04	0.36	8.74	4.16	4.08
M.4	Goris - Kapan	277.18	298.98	2	219	4.13	4.04	0.24	5.81	4.16	4.10
M.4	Goris - Kapan	241.18	277.08	3	360	4.00	4.01	0.12	3.00	4.01	3.99
WEIGHTED AVERAGE				1	131	7.50	7.50	0.80	10.67	7.60	7.40
				2	2,693	4.84	4.70	0.59	12.26	4.89	4.80
				3	360	4.00	4.01	0.12	3.00	4.01	3.99

Note: Deflection measures in original surveys converted to Modified Structural Numbers (SNC) using the following formula:

$$SNC = 3.2 * (\text{Deflection mm})^{-0.63}$$

This formula is suggested in the World Bank's "Description of the HDM-III Model" (Volume 1), notably in the discussion of pavement structural characteristics.

Source: Consultant's estimates based on ARD survey data

TABLE6-1.XLS

Table A.6.2 C.I.S REPUBLICS - GEOMETRIC AND PAVEMENT DESIGN STANDARDS

GEOMETRIC DESIGN STANDARDS	ROAD DESIGN CATEGORY				
	I	II	III	IV	V
TRAFFIC					
ADT (vehicles)	> 7,000	> 3,000-7,000	> 1,000-3,000	100-1,000	< 100
PCU / Day	> 14,000	> 6,000-14,000	> 2,000-6,000	200-2,000	< 200
DESIGN SPEED (Kph)					
Flat/rolling terrain	150	120	100	80	60
Winding/hilly terrain	120	100	80	60	40
Mountainous terrain	80	60	50	40	30
PAVEMENT WIDTH (m)					
No.of lanes	4,6 or 8	2	2	2	1
Lane width (m)	3.75	3.75	3.50	3.00	4.50
Shoulder width (m)	3.75	3.75	2.50	2.00	1.75
Formation width (m)	27.5-43.5	15.00	12.00	10.00	8.00
PAVEMENT DESIGN STANDARDS					
Surface	4 cm AC (hot)	5 cm AC (cold)	5 cm AC (cold)	8cm crushed stone with bitumen	9-18 cm crushed stone
2nd layer	6 cm AC (hot)	8 cm AC (cold)	5 cm AC (cold)		
3rd layer	8 cm AC (hot)				
Base course	20 cm sand-gravel with cement (4-6%) or 20 cm crushed rock	15 cm crushed stone with bitumen	8 cm crushed stone with bitumen	18 cm crushed stone-sand	
Sub-Base	20 cm sand with bitumen (4%) or 20 cm loam	19 cm crushed stone	16 cm crushed stone - sand		
Theoretical Structural Number (SN)					
Surface	0.63	0.39	0.39	0.95	0.74
2nd layer	0.95	0.63	0.39		
3rd layer	0.95				
Base course	1.58	1.77	0.95	0.69	
Sub-base	0.79	1.05	0.69		
Sub-grade	0.79	0.79	0.79	0.79	0.79
TOTAL	5.69	4.63	3.21	2.43	1.53

Table A.6.1 (continued) UZBEKISTAN - PUBLIC ROAD NETWORK BY DESIGN CATEGORY

Road Number and Category	Road Name	Road Length by Design Category (km) - January 1995						Total
		I	II	III	IV	V	Other	
M34	Tashkent-Sirdarya-Gulistan-Khavast-(Tajikistan)	92	52	16	0	0	0	160
M37	Samarkand - Bokhara - Turkmenistan	283	70	12	0	0	0	365
M39	(Kazakhstan)-Tashkent-Samarkand-Termez-(Afghanistan)	384	136	102	52	7	0	681
M41	(Turzunzade)-Dinau-Termez-(Afghanistan)	0	187	0	0	0	0	187
	Inter State	759	445	130	52	7	0	1,393
A373	Tashkent-Kokand-Andijan-(Osh) and approach road to Tashkent Airport	123	219	36	26	0	0	404
A376	Kokand-(Kanibadan)-(Bekabad)-Dzizak	49	103	16	0	0	0	168
A377	Samarkand - (Tajikistan)	3	10	12	12	0	0	37
A378	Samarkand - Karshi	15	23	74	21	0	0	133
A379	Navoi - Zarafsan - Uchkuduk	116	175	0	0	0	0	291
A380	Guzar (M39)-Bokhara-Urgench-Nukus	152	217	294	107	0	0	770
A381	Nukus - Khojeili - (Turkmenistan)	22	20	0	0	0	0	42
	Main Intra State (Republican)	480	767	432	166	0	0	1,845
	Other Republican	515	3,775	5,518	7,296	1,413	70	18,587
	Total Republican	995	4,542	5,950	7,462	1,413	70	20,432
	TOTAL MAIN INTER URBAN ROADS	1,754	4,987	6,080	7,514	1,420	70	21,825
	Oblast / Regional	26	87	1,494	7,651	2,555	0	11,813
	Rayon / District	32	84	299	4,545	4,720	0	9,680
	Sub-total Regional and District Roads	58	171	1,793	12,196	7,275	0	21,493
	TOTAL	1,812	5,158	7,873	19,710	8,695	70	43,318

Source: Uzavtoyul

Table A.6.1 (continued) TAJIKISTAN - PUBLIC ROAD NETWORK BY DESIGN CATEGORY AND PAVEMENT TYPE

Road Number	Location	Road Length by Design Category (km)					Total
		I	II	III	IV	V	
"M" Roads							
M34	Dushanbe-Ura Tube-(Tashkent)	0.0	30.9	24.9	100.5	143.4	299.7
M34	Dushanbe-Kurgan Tube-Aivaj	6.0	0.0	195.8	12.0	0.0	213.8
M41	Dushanbe-Turzunzade-(Termez)	0.0	0.0	61.0	0.0	0.0	61.0
M41	Dushanbe-Chorog	0.0	12.0	54.0	65.0	383.6	514.6
Sub total	Inter State Roads	6.0	42.9	335.7	177.5	527.0	1,089.1
"A" Roads							
A372	Konsomolabad-Garm-Dzircatal-Karamyk	0.0	0.0	0.0	0.0	217.2	217.2
A376	(Kokand)-Kanibadan-Hudzand-Bekabad-(Dzizak)	0.0	98.1	36.0	0.0	0.0	134.1
A377	(Samarkand)-Ajni (M34)	0.0	5.0	14.7	50.0	43.0	112.7
A385	Ordzonikidzabad (M41)-Dangara-Piandj	0.0	0.0	49.0	89.8	93.3	232.1
Sub-total	Intra State Roads	0.0	103.1	99.7	139.8	353.5	696.1
TOTAL	MAIN ROADS	6.0	146.0	435.4	317.3	880.5	1,785.2
% of total		0.3	8.2	24.4	17.8	49.3	100.0

Note: Locations in brackets are in Uzbekistan.

Source: Ministry of Transport

Table A.6.1 (continued) KYRGYZSTAN - PUBLIC ROAD NETWORK BY DESIGN CATEGORY

Road Number and Class	Road name	Road Length by Design Category (km)						
		I	II	III	IV	V	Other	Total
M39 (a)	Challdovar-Bishkek- Georgijevka	12.2	119.9	0.0	0.0	0.0	0.0	132.1
M41 (b)	Kara Balta - Osh	0.0	89.3	137.6	388.6	0.0	0.0	615.5
	Inter State	12.2	209.2	137.6	388.6	0.0	0.0	747.6
A361	(Dzambul)-Talas-Oetmek Pass (M41)	0.0	0.0	167.0	49.0	0.0	0.0	216.0
A362	Tyup - (Keghen)	0.0	0.0	0.0	76.0	0.0	0.0	76.0
A363	Tyup - Toktoyan	0.0	80.5	267.0	97.5	0.0	0.0	445.0
A364	Borsko'on - Kara Saja - Enichek	0.0	0.0	30.0	322.0	97.0	0.0	449.0
A365	Bishkek-Tokmak-Balykchi-Naryn-Torugatt - (China)	0.0	107.0	301.1	123.9	7.0	0.0	539.0
A367	Tyuz Ahu (M41) - Kochkorka (A365)	0.0	0.0	90.2	148.1	0.0	0.0	238.3
A370	Osh - Uzghen - Kok Art	0.0	0.0	30.0	100.0	45.0	0.0	175.0
A371 (c)	Sari tash - Irkeshtam	0.0	0.0	0.0	78.0	0.0	0.0	78.0
A372 (c)	Sari Tash - Karamyk - (Tajikistan)	0.0	0.0	0.0	146.0	0.0	0.0	146.0
	Intra State (Republican)	0.0	187.5	885.3	1,140.5	149.0	0.0	2,362.3
	Total Main Inter Urban Roads	12.2	396.7	1,022.9	1,529.1	149.0	0.0	3,109.9
	Other roads	127.8	0.0	1,037.1	7,380.9	6,934.3	0.0	15,480.1
	TOTAL	140.0	396.7	2,060.0	8,910.0	7,083.3	0.0	18,590.0

Source: Ministry of Transport

Note:

(a) Including the Bishkek bypass

(b) Does not include the 229 km of the M41 between Osh and the Tajikistan border (the "Pamir Highway").

This section does not come under the jurisdiction of the Ministry of Transport in Bishkek which has no information about it.

(c) In the absence of reliable data, this has been estimated.

Table A.6.1 (continued) KAZAKHSTAN - PUBLIC ROAD NETWORK BY DESIGN CATEGORY

Road No. and Class	Road	Road Length by Design Category (km)						Total
		I	II	III	IV	V	Other (unpaved)	
M32	Chimkent-Aralsk-Aktiubinsk-(Russia-Samara)	33	135	1,691	189	0	0	2,048
M36	M36/M39-Kaskelen--Karaganda-Akmola-Kustanai-(Russia)	52	450	1,594	0	0	0	2,096
M38	(Russia)-Pavlodar-Semipalatinsk-Maikapchagai - (China)	51	432	642	0	0	0	1,125
M39	Almaty-Kaskelen-Georgievka-Djambul-Chimkent-(Uzbekistan)	130	455	88	0	0	0	673
M51	(Russia)-Petropavlovsk-Bulaveo-(Russia)	6	162	22	0	0	0	190
	Total Inter State	272	1,634	4,037	189	0	0	6,132
A340	Aktubinsk-Makat-Ganushkino-(Russia)	0	83	807	0	17	0	907
A341	Mamlutka-Leninskoe-Kustanai	0	0	404	0	0	0	404
A342	Yezkazgan-Derzhavinsk-Petropavlovsk	65	41	755	62	26	0	949
A343	Akmola-Kokshetau-Petropavlovsk	8	11	444	0	0	0	463
A344	Kyzil Orda-Karaganda-Pavlodar	76	110	1,190	0	0	0	1,376
A345	Karaganda-Ayaguz-Bugaz	0	0	921	0	0	0	921
A349	Semipalatinsk-(Russia)	0	13	100	0	0	0	113
A350	Almaty-Taldy Kurgan-Ayaguz-Ust Kaminogorsk	142	156	780	0	0	0	1,078
A351	Almaty-Kokpek-Chundzha-Koktal	29	276	0	0	0	0	305
A353	Sari Ozek-Jarkent-Khorgos	0	0	232	0	0	0	232
A355	Ucharal-Druzhba (Dostyk)	0	0	184	0	0	0	184
A356	Taskesken-Makanchi-Bachty -(China)	0	0	190	0	0	0	190
A358	Merke-Dzambul-Burubaital	0	151	124	0	0	0	275
A359	Georgievka-Merke	0	150	0	0	0	0	150
A362	Kokpek-Kegen-(Kyrgyzstan)	0	6	109	0	0	0	115
	Sub Total Main Intra State (Republican)	320	997	6,240	62	43	0	7,662
	Other Intra State (Republican)	41	422	3,028	211	0	0	3,702
	Total Intra State (Republican)	361	1,419	9,268	273	43	0	11,364
	TOTAL MAIN INTER URBAN ROADS	633	3,053	13,305	462	43	0	17,496
	Local roads (including urban roads)	242	1,451	19,153	41,290	2,851	4,854	69,841
	GRAND TOTAL	875	4,504	32,458	41,752	2,894	4,854	87,337

Source: Consultants' estimates based on KAZDORNII and Department of Highways data.

Table A.6.1 (continued) GEORGIA - PUBLIC ROAD NETWORK BY DESIGN CATEGORY

Road No. and Class	Road Name	Road Length by Design Category (km)						Total
		I	II	III	IV	V	Other	
S.1	Tbilisi-Kutaisi-Senaki	37.0	61.0	187.0	0.0	0.0	0.0	285.0
S.2	Senaki-Batumi	0.0	14.0	53.0	38.0	0.0	0.0	105.0
S.3	S1/S3 - Kasbegi-(Russia)	0.0	0.0	57.0	101.0	7.0	0.0	165.0
S.4	Tbilisi-Tsiteli Khidi-(Azerbaijan)	0.0	14.0	13.0	29.0	0.0	0.0	56.0
S.5	Tbilisi-Lagodekhi-(Azerbaijan)	0.0	70.0	57.0	11.0	0.0	0.0	138.0
S.6	Tbilisi-Marneuli-Bolnisi-Guguti (Armenia)	0.0	12.0	58.0	23.0	0.0	0.0	93.0
S.7	Marneuli-Sadakhlo-(Armenia)	0.0	5.0	3.0	26.0	0.0	0.0	34.0
S.8	Khashuri-Borjomi-Akhaltsikhe-(Armenia)	0.0	0.0	16.0	5.0	0.0	0.0	21.0
S.9	Tbilisi Bypass	0.0	0.0	23.0	26.0	0.0	0.0	49.0
	Total Inter State	37.0	176.0	467.0	259.0	7.0	0.0	946.0
	Total Intra State (Republican)	2.2	83.5	301.1	2,247.1	1,425.4	0.0	4,059.3
	TOTAL MAIN ROADS	39.2	259.5	768.1	2,506.1	1,432.4	0.0	5,005.3

Note: The republican road network is in the process of redefinition and it may finally be smaller than indicated above.

Source: Consultant's estimate based on Sakavtogsa data.

Table A.6.1 (continued) AZERBAIJAN PUBLIC ROAD NETWORK BY DESIGN CATEGORY IN 1996

Road No.	Road Name	Length (km) of Inter-Urban Roads by Design category								
		I	II	II - III	III	III - IV	IV	III-IV-V	V	Total
M.1	Baku - Georgia border	1.5	499.5	0.0	0.0	0.0	0.0	0.0	0.0	501.0
M.1	Approach roads	0.0	87.0	0.0	0.0	0.0	0.0	0.0	0.0	87.0
M.2	Baku - Russian border	73.0	155.0	0.0	0.0	0.0	0.0	0.0	0.0	228.0
M.4	Approach roads	0.0	54.0	0.0	0.0	0.0	0.0	0.0	0.0	54.0
M3	Baku - Astara (Iranian border)	70.0	56.0	192.0	0.0	0.0	0.0	0.0	0.0	318.0
M.4	Alat - Kurdamir - Yevlak	0.0	212.0	0.0	0.0	0.0	0.0	0.0	0.0	212.0
M.4	Approach roads	0.0	9.0	0.0	0.0	0.0	0.0	0.0	0.0	9.0
	Sub-Total Inter State Roads	144.5	1,072.5	192.0	0.0	0.0	0.0	0.0	0.0	1,409.0
A	Sub - Total Intra State (Republican) Roads	0.0	253.0	297.0	1,159.0	874.0	371.0	326.0	0.0	3,280.0
	TOTAL MAIN INTER URBAN ROADS	144.5	1,325.5	489.0	1,159.0	874.0	371.0	326.0	0.0	4,689.0
A33-A53	Republican roads in occupied areas	0.0	0.0	60.0	438.0	555.0	110.0	203.0	0.0	1,366.0

Source: Azeravtoyol

Table A.6.1 ARMENIAN PUBLIC ROAD NETWORK BY DESIGN CATEGORY IN 1996

Road No.	Road Name	Length (km) of Inter-Urban Roads by Design category						Urban roads	Grand Total
		I	II	III	IV	V	Total		
M.1 (E)	Yerevan-Giumri-Ashotsk-Bavra (Georgia	18.4	131.5	0.0	0.0	0.0	149.9	23.8	173.7
M.2 (E)	Markara (Turk.border)-Ashtarak-Vanadzor-Tashir-Dzoranut-(Georgia)	0.0	130.7	48.4	0.0	0.0	179.1	4.6	183.7
M.3 (E)	Yerevan-Sevan-ljevan-(Azerbaijan)	63.7	40.6	42.8	5.2	0.0	152.2	0.0	152.2
M.4 (E)	Yerevan-Yeraskh-Goris-Meghri-(Iran)	38.0	209.0	77.2	36.9	0.0	361.1	10.0	371.1
M.5	Verdaghiur - Tashir	0.0	0.0	0.0	54.0	0.0	54.0	0.0	54.0
M.6	Spitak-Giumri-Akhurit	0.0	45.0	0.0	7.5	0.0	52.5	3.6	56.1
M.7	Vanadzor-Alaverdi-Bagratashen - (Sadakhlo Georgia)	0.0	14.4	66.0	0.0	0.0	80.3	10.9	91.2
M.8	Gulakarak - Toumanian	0.0	0.0	0.0	18.0	0.0	18.0	0.0	18.0
M.9	Vanadzor-Dilijan	0.0	41.6	0.0	0.0	0.0	41.6	0.0	41.6
M.10	Talin-Karakert-Bagaran - (Turkey)	0.0	0.0	41.0	0.0	0.0	41.0	0.0	41.0
M.11	Ashtarak-Abovian	0.0	0.0	25.2	0.0	0.0	25.2	0.0	25.2
M.12	Yerevan-Oktemberjan-Karakala - (Turkey)	45.0	0.0	10.7	0.0	0.0	55.7	7.0	62.7
M.13	Yerevan-Geghart	0.0	0.0	38.1	0.0	0.0	38.1	0.0	38.1
M.14	Sevan-Martuni-Getap	0.0	134.0	0.0	0.0	0.0	134.0	0.0	134.0
M.15	Martuni-Vardenis-Sotk	0.0	42.0	12.0	0.0	0.0	54.0	0.0	54.0
M.16	Vardenis-Shorja-Tcovagugh	0.0	0.0	84.0	0.0	0.0	84.0	0.0	84.0
M.17	Angerakot- (Nakhichevan / Azerbaijan)	0.0	0.0	23.0	0.0	0.0	23.0	0.0	23.0
M.18	Goris - Zabukh - (Azerbaijan)	0.0	0.0	25.4	0.0	0.0	25.4	0.0	25.4
"M"	Sub-Total Inter State Roads	165.1	788.7	493.7	121.6	0.0	1,569.1	59.9	1,629.0
"13P"	Sub - Total Intra State Roads	0.0	83.0	150.0	1,045.7	300.0	1,578.7	0.0	1,578.7
	TOTAL MAIN ROAD NETWORK	165.1	871.7	643.7	1,167.3	300.0	3,147.8	59.9	3,207.7
	Local and other public roads								4,580.4
	TOTAL PUBLIC ROAD NETWORK								7,788.0

Source: ARD

ANNEX 6

Table A.4.5 SUMMARY OF EQUIVALENT STANDARD AXLES BY VEHICLE TYPE

Country	Equivalent Standard Axles (ESA) by Vehicle Type (from axle load survey results)					
	Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axles
Armenia	0.0001	0.0014	0.6348	0.1616	0.4073	0.3566
Azerbaijan	0.0001	0.0014	1.2341	0.1272	0.1792	0.3384
Georgia	0.0001	0.0014	1.9811	0.0974	0.5004	1.1296
Kazakhstan	0.0001	0.0014	0.2481	0.0453	0.1814	0.2148
Kyrgyz Republic	0.0001	0.0014	0.1660	0.0686	0.1667	0.6335
Tajikistan	0.0001	0.0014	0.1660	0.0686	0.1667	0.6335
Uzbekistan	0.0001	0.0014	1.0997	0.1930	0.1879	1.0115
Country	Equivalent Standard Axles (ESA) by Vehicle Type (allowing for growth in truck sizes)					
	Car	Utility Vehicle	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axles
Armenia	0.0001	0.0014	0.6348	0.2069	0.5214	0.4565
Azerbaijan	0.0001	0.0014	1.2341	0.1628	0.2294	0.4332
Georgia	0.0001	0.0014	1.9811	0.1247	0.6406	1.4460
Kazakhstan	0.0001	0.0014	0.2481	0.0580	0.2322	0.2750
Kyrgyz Republic	0.0001	0.0014	0.1660	0.0878	0.2134	0.8109
Tajikistan	0.0001	0.0014	0.1660	0.0878	0.2134	0.8109
Uzbekistan	0.0001	0.0014	1.0997	0.2471	0.2405	1.2948

Note: An annual growth of 2.5% in ESA/Vehicle has been assumed for trucks over the period 1996 - 2006

Source: Consultant's estimate based on axle survey results.

Table A.4.4 AVERAGE PAVEMENT DAMAGE FACTORS PER PAYLOAD TONNE

Vehicle Type and Axle	Sample size (vehicles)	Mean GVW (tonnes)	Pavement Damage Factors (Single Axle)				Estimated Payload (tonnes)	Pavement Damage Factors per Payload Tonne			
			8.16 T Reference Axle		10.00 T Reference Axle			8.16 T Reference Axle		10.00 T Reference Axle	
			Exponent = 4 (ESA)	Exponent = 4.5 (ESA)	Exponent = 4 (ESA)	Exponent = 4.5 (ESA)		Exponent = 4 (ESA)	Exponent = 4.5 (ESA)	Exponent = 4 (ESA)	Exponent = 4.5 (ESA)
2 Axle HGV (all)	899	7.19	0.1063	0.0772	0.0471	0.0309	4.31	0.02	0.02	0.01	0.01
2 Axle HGV (non-CIS)	15	12.12	4.8669	5.9314	2.1578	2.3755	7.27	0.67	0.82	0.30	0.33
3 Axle HGV (all)	1017	12.80	0.2350	0.1720	0.1042	0.0689	7.68	0.03	0.02	0.01	0.01
3 Axle HGV (non-CIS)	41	18.52	1.2701	1.1844	0.5631	0.4743	11.11	0.11	0.11	0.05	0.04
4 Axle HGV (all)	152	21.51	0.8342	0.6991	0.3699	0.2800	12.91	0.06	0.05	0.03	0.02
4 Axle HGV (non-CIS)	56	26.40	1.9239	1.7875	0.8530	0.7159	15.84	0.12	0.11	0.05	0.05
5 Axle HGV (all)	370	22.39	0.4533	0.3360	0.2010	0.1346	13.43	0.03	0.03	0.01	0.01
5 Axle HGV (non-CIS)	125	28.83	1.3059	1.1127	0.5790	0.4456	17.30	0.08	0.06	0.03	0.03

Note: GVW = gross vehicle weight. Payload estimated at 60 percent of GVW.

Source: Consultant's estimates based on the results of axle load surveys in six TRACECA countries.

Table A.4.3 PAVEMENT DAMAGE FACTORS FOR THE HEAVIEST TEN PERCENT OF GOODS VEHICLES IN EACH CATEGORY

Vehicle Type and Axle	Sample size (vehicles)	Mean Weight (tonnes)	Distribution of Axle Weight (%)	Pavement Damage Factors (Single Axle)			
				8.16 T Standard Axle		10.00 T Standard Axle	
				Exponent=4 (ESA)	Exponent=4.5 (ESA)	Exponent=4 (ESA)	Exponent=4.5 (ESA)
2 Axle HGV (all)	90						
Axle 1		4.85	30.64	0.1248	0.0962	0.0553	0.0385
Axle 2		10.98	69.36	3.2783	3.8028	1.4535	1.5230
GVW		15.83	100.00	3.4031	3.8990	1.5088	1.5616
3 Axle HGV (all)	102						
Axle 1		4.84	19.46	0.1238	0.0953	0.0549	0.0382
Axle 2		10.08	40.53	2.3285	2.5880	1.0324	1.0365
Axle 3		9.95	40.01	2.2107	2.4412	0.9801	0.9777
GVW		24.87	100.00	4.6630	5.1245	2.0674	2.0524
4 Axle HGV (all)	15						
Axle 1		6.16	15.23	0.3248	0.2822	0.1440	0.1130
Axle 2		11.40	28.19	3.8094	4.5026	1.6890	1.8033
Axle 3		11.69	28.91	4.2121	5.0415	1.8675	2.0191
Axle 4		11.19	27.67	3.5364	4.1412	1.5679	1.6586
GVW		40.44	100.00	11.8827	13.9675	5.2683	5.5940
5 Axle HGV (all)	37						
Axle 1		5.50	12.63	0.2064	0.1694	0.0915	0.0679
Axle 2		8.05	18.49	0.9472	0.9408	0.4199	0.3768
Axle 3		8.37	19.22	1.1070	1.1211	0.4908	0.4490
Axle 4		11.14	25.59	3.4736	4.0586	1.5401	1.6255
Axle 5		10.48	24.07	2.7207	3.0833	1.2063	1.2349
GVW		43.54	100.00	8.4549	9.3733	3.7486	3.7540

Source: Consultant's estimates based on the results of axle load surveys in six TRACECA countries.

Table A.4.2 PAVEMENT DAMAGE FACTORS FOR DIFFERENT VEHICLE TYPES IN THE TRACECA COUNTRIES

Vehicle Type and Axle	Sample size (vehicles)	Mean Weight (tonnes)	Pavement Damage Factors (Single Axle)			
			8.16 T Standard Axle		10.00 T Standard Axle	
			Exponent = 4 (ESA)	Exponent = 4.5 (ESA)	Exponent = 4 (ESA)	Exponent = 4.5 (ESA)
2 Axle Buses (all)	15					
Axle 1		4.91	0.1311	0.1017	0.0581	0.0407
Axle 2		8.83	1.3711	1.4263	0.6079	0.5712
GVW		13.73	1.5022	1.5280	0.6660	0.6120
3 Axle Buses (non-CIS)	2					
Axle 1		5.81	0.2570	0.2169	0.1139	0.0869
Axle 2		9.50	1.8371	1.9822	0.8145	0.7939
Axle 3		4.50	0.0925	0.0687	0.0410	0.0275
GVW		19.80	2.1866	2.2678	0.9695	0.9082
2 Axle HGV (all)	899					
Axle 1		2.66	0.0113	0.0064	0.0050	0.0026
Axle 2		4.53	0.0950	0.0708	0.0421	0.0283
GVW		7.19	0.1063	0.0772	0.0471	0.0309
2 Axle HGV (non-CIS)	15					
Axle 1		4.15	0.0669	0.0477	0.0297	0.0191
Axle 2		7.97	0.9101	0.8994	0.4035	0.3602
GVW		12.12	4.8669	5.9314	2.1578	2.3755
3 Axle HGV (all)	1017					
Axle 1		3.79	0.0465	0.0317	0.0206	0.0127
Axle 2		4.57	0.0984	0.0736	0.0436	0.0295
Axle 3		4.47	0.0900	0.0666	0.0399	0.0267
GVW		12.80	0.2350	0.1720	0.1042	0.0689
3 Axle HGV (non-CIS)	41					
Axle 1		4.45	0.0884	0.0653	0.0392	0.0262
Axle 2		7.78	0.8263	0.8069	0.3664	0.3232
Axle 3		6.30	0.3553	0.3122	0.1575	0.1250
GVW		18.52	1.2701	1.1844	0.5631	0.4743
4 Axle HGV (all)	152					
Axle 1		4.62	0.1028	0.0773	0.0456	0.0310
Axle 2		6.50	0.4026	0.3593	0.1785	0.1439
Axle 3		5.13	0.1562	0.1239	0.0693	0.0496
Axle 4		5.26	0.1727	0.1386	0.0765	0.0555
GVW		21.51	0.8342	0.6991	0.3699	0.2800
4 Axle HGV (non-CIS)	56					
Axle 1		5.05	0.1467	0.1154	0.0650	0.0462
Axle 2		7.72	0.8011	0.7792	0.3552	0.3121
Axle 3		6.97	0.5323	0.4920	0.2360	0.1970
Axle 4		6.66	0.4437	0.4009	0.1967	0.1606
GVW		26.40	1.9239	1.7875	0.8530	0.7159
5 Axle HGV (all)	370					
Axle 1		4.34	0.0800	0.0584	0.0355	0.0234
Axle 2		4.57	0.0984	0.0736	0.0436	0.0295
Axle 3		4.35	0.0808	0.0590	0.0358	0.0236
Axle 4		4.56	0.0975	0.0729	0.0432	0.0292
Axle 5		4.55	0.0967	0.0722	0.0429	0.0289
GVW		22.39	0.4533	0.3360	0.2010	0.1346
5 Axle HGV (non-CIS)	125					
Axle 1		4.92	0.1322	0.1026	0.0586	0.0411
Axle 2		5.95	0.2827	0.2414	0.1253	0.0967
Axle 3		5.47	0.2019	0.1653	0.0895	0.0662
Axle 4		6.16	0.3248	0.2822	0.1440	0.1130
Axle 5		6.34	0.3644	0.3212	0.1616	0.1286
GVW		28.83	1.3059	1.1127	0.5790	0.4456

Source: Consultant's estimates based on the results of axle load surveys in six TRACECA countries.

Table A.4.1 AXLE LOADING AND VEHICLE WEIGHTS BY VEHICLE TYPE IN TRACECA COUNTRIES

Vehicle Type and Axle	Sample size (vehicles)	Weight (tonnes)								Weight Distribution on Axles (%)
		Mean	95% Confidence range for Mean		Median	Standard Error	Standard Deviation	Coefficient of Variation (%)	Maximum	
			Lower	Upper						
2 Axle Buses (all)	15	4.91	4.31	5.51	5.20	0.30	1.18	24.0	7.41	35.7
Axle 1		8.83	7.84	9.82	9.03	0.51	1.96	22.2	13.05	64.3
Axle 2		13.73	12.25	15.21	14.01	0.75	2.92	21.3	18.48	100.0
GVW										
3 Axle Buses (non-CIS)	2	5.81	5.36	6.26	5.81	0.23	0.33	5.7	6.04	29.3
Axle 1		9.50	8.90	10.10	9.50	0.30	0.43	4.5	9.80	48.0
Axle 2		4.50	4.39	4.61	4.50	0.05	0.08	1.8	4.55	22.6
Axle 3		19.80	18.86	20.74	19.80	0.48	0.68	3.4	20.28	100.0
GVW										
2 Axle HGV (all)	899	2.66	2.57	2.75	2.25	0.04	1.32	49.6	7.82	37.0
Axle 1		4.53	4.34	4.72	3.51	0.10	2.92	64.5	23.44	63.0
Axle 2		7.19	6.94	7.44	6.32	0.13	3.84	53.4	31.26	100.0
GVW										
2 Axle HGV (non-CIS)	15	4.15	3.21	5.09	3.37	0.48	1.85	44.6	6.98	34.2
Axle 1		7.97	5.34	10.60	6.50	1.34	5.20	65.2	23.25	65.8
Axle 2		12.12	8.75	15.49	10.68	1.72	6.65	54.9	29.72	100.0
GVW										
3 Axle HGV (all)	1017	3.79	3.73	3.85	3.82	0.03	0.96	25.3	10.07	29.6
Axle 1		4.57	4.41	4.73	3.58	0.08	2.60	56.9	18.97	35.7
Axle 2		4.47	4.31	4.63	3.46	0.07	2.63	58.8	21.81	34.7
Axle 3		12.80	12.45	13.15	10.80	0.18	5.63	44.0	39.95	100.0
GVW										
3 Axle HGV (non-CIS)	41	4.45	4.04	4.86	4.27	0.21	1.36	30.6	7.59	24.0
Axle 1		7.78	6.48	9.08	8.80	0.66	4.24	54.5	15.18	41.9
Axle 2		6.30	4.99	7.61	6.65	0.67	4.28	67.9	21.81	34.1
Axle 3		18.52	15.83	21.21	18.82	1.37	8.78	47.4	37.41	100.0
GVW										
4 Axle HGV (all)	152	4.62	4.39	4.85	4.43	0.11	1.42	30.7	8.77	21.5
Axle 1		6.50	5.96	7.04	5.45	0.27	3.37	51.8	13.56	30.2
Axle 2		5.13	4.62	5.64	4.14	0.26	3.21	62.6	14.02	23.8
Axle 3		5.26	4.75	5.77	4.39	0.26	3.23	61.4	21.51	24.5
Axle 4		21.51	19.87	23.15	19.44	0.84	10.31	47.9	48.62	100.0
GVW										
4 Axle HGV (non-CIS)	56	5.05	4.69	5.41	5.49	0.18	1.36	26.9	7.84	19.1
Axle 1		7.72	6.84	8.60	7.50	0.45	3.36	43.5	13.56	29.2
Axle 2		6.97	6.02	7.92	6.48	0.49	3.65	52.4	14.02	26.4
Axle 3		6.66	5.69	7.63	6.89	0.49	3.69	55.4	21.51	25.2
Axle 4		26.40	23.50	29.30	26.34	1.48	11.08	42.0	48.62	100.0
GVW										
5 Axle HGV (all)	370	4.34	4.23	4.45	4.13	0.05	1.05	24.2	6.82	19.4
Axle 1		4.57	4.32	4.82	3.89	0.13	2.44	53.4	22.41	20.4
Axle 2		4.35	4.09	4.61	3.66	0.13	2.56	58.9	20.87	19.4
Axle 3		4.56	4.22	4.90	3.47	0.17	3.36	73.7	32.21	20.4
Axle 4		4.55	4.23	4.87	3.67	0.16	3.13	68.8	21.62	20.4
Axle 5		22.39	21.27	23.51	19.23	0.57	10.97	49.0	73.99	100.0
GVW										
5 Axle HGV (non-CIS)	615	4.92	4.72	5.12	5.11	0.10	1.17	23.8	6.82	17.1
Axle 1		5.95	5.47	6.43	6.13	0.25	2.75	46.2	22.41	20.6
Axle 2		5.47	4.96	5.98	5.20	0.26	2.92	53.4	20.87	19.0
Axle 3		6.16	5.64	6.68	5.99	0.26	2.96	48.1	11.89	21.4
Axle 4		6.34	5.80	6.88	6.50	0.28	3.09	48.7	15.25	22.0
Axle 5		28.83	26.93	30.73	31.60	0.97	10.83	37.6	63.83	100.0
GVW										

Source: Consultant's analysis of axle load surveys carried out in Uzbekistan, Kyrgyzstan, Kazakhstan, Azerbaijan, Georgia and Armenia.

ANNEX 4

Table A.3.9 AZERBAIJAN AND KYRGYZSTAN - BASE VEHICLE OPERATING COSTS AND PASSENGER AND GOODS DELAY COSTS.

Country and Cost Component	US\$ per 1,000 Vehicle Kilometres						
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
AZERBAIJAN							
Fuel	28.76	58.02	64.19	40.65	79.27	121.95	
Lubricants	3.04	3.04	5.05	5.05	5.05	7.79	
Tyres	4.63	4.63	117.47	47.73	161.53	268.38	
Crew time	0.00	3.98	10.12	8.71	8.21	16.75	
Maintenance labour	1.09	1.14	3.68	3.72	4.69	10.80	
Maintenance parts	23.28	22.91	32.59	39.59	105.89	147.78	
Depreciation	28.83	18.64	91.91	46.62	93.84	97.07	
Interest	22.58	11.81	40.87	20.96	51.86	64.50	
Overheads	0.00	10.00	20.00	25.00	25.00	20.00	
TOTAL V.O.C	112.21	134.17	385.88	238.03	535.34	755.02	
Passenger time costs	3.67	n.e	120.00	n.e	n.e	n.e	
V.O.C + Pass.Time	115.88		505.88				
KYRGYZ REPUBLIC							
Fuel	17.73	40.08	97.29	60.14	91.65	158.71	
Lubricants	3.46	3.46	5.74	5.74	5.74	8.86	
Tyres	4.63	6.90	183.39	71.42	161.76	361.82	
Crew time	0.00	9.43	19.24	20.22	16.54	35.55	
Maintenance labour	2.51	2.79	9.85	8.42	11.84	27.12	
Maintenance parts	21.07	36.54	57.00	42.43	118.40	170.65	
Depreciation	25.01	18.46	60.58	36.21	52.71	54.95	
Interest	25.53	14.69	42.06	33.60	41.06	51.00	
Overheads	0.00	10.00	12.00	22.00	22.00	22.00	
TOTAL V.O.C	99.94	142.35	487.15	300.18	521.70	890.66	
Passenger Time	8.58	18.86	126.95	2.08	1.71	2.73	
V.O.C + Pass.Time	108.52	161.21	614.10	302.26	523.41	893.39	
Goods Delay Costs	0.00	0.00	0.00	1.04	1.71	4.10	
Road User Costs	108.52	161.21	614.10	303.30	525.12	897.49	
Country	Vehicle - Km (million)						Total
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
Azerbaijan	1,967.3	605.1	276.6	1,063.7	260.7	323.5	4,496.9
Kyrgyz Republic	884.5	135.3	73.6	259.0	92.3	61.4	1,506.1
Country and Cost category	Road User Costs (US\$ '000)						Total
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle	
Azerbaijan							
Vehicle Operating Costs	220,751	81,186	106,734	253,193	139,563	244,249	1,045,676
Passenger Delay Costs	7,220	0	33,192	0	0	0	40,412
Sub Total	227,971	81,186	139,926	253,193	139,563	244,249	1,086,088
Kyrgyz Republic							
Vehicle Operating Costs	88,397	19,260	35,854	77,747	48,153	54,687	324,097
Passenger Delay Costs	7,589	2,552	9,344	539	158	168	20,348
Sub Total	95,986	21,812	45,198	78,285	48,311	54,854	344,446
Goods delay costs	0	0	0	269	158	252	679
TOTAL R.U.C	95,986	21,812	45,198	78,555	48,469	55,106	345,125
Sources:	Carl Bro International a/s - Kyrgyzstan passenger and goods delay costs Wilbur Smith and Associates - Azerbaijan passenger delay costs Consultant's estimate - other vehicle operating costs						

Table A.3.8 TRACECA COUNTRIES - BACKGROUND ECONOMIC DATA

Country	Area (^{'000} sq.km)	Population				
		Total 1994 (million)	Total 1995 (million)	Annual change (%)	Density / sq.km	% urban
Armenia	30	3.7	3.8	1.4	125	68.5
Azerbaijan	87	7.5	7.6	1.0	87	55.5
Georgia	70	5.4	5.4	-0.2	77	58.0
Kazakhstan	2,717	16.8	16.8	0.1	6	59.3
Kyrgyz Republic	198	4.5	4.5	0.4	23	38.8
Tajikistan	143	5.8	5.9	2.0	41	32.2
Turkmenistan	488	4.4	4.6	4.6	9	44.9
Uzbekistan	447	22.4	22.9	2.2	51	41.2

Country	GDP 1994		GDP 1995		Change (%)	
	(US\$ million)	Per Capita (US\$)	(US\$ million)	Per Capita (US\$)	GDP	GDP per Capita
Armenia	2,607.0	704.6	2,789.5	743.5	7.0	5.5
Azerbaijan	3,541.0	472.1	2,939.0	388.0	-17.0	-17.8
Georgia	2,063.0	382.0	1,959.9	363.7	-5.0	-4.8
Kazakhstan	18,167.0	1,081.4	16,532.0	983.1	-9.0	-9.1
Kyrgyz Republic	2,666.0	592.4	2,506.0	554.7	-6.0	-6.4
Tajikistan	2,009.0	346.4	1,767.9	298.8	-12.0	-13.7
Turkmenistan	5,156.0	1,171.8	4,898.2	1,064.3	-5.0	-9.2
Uzbekistan	21,508.0	960.2	21,077.8	920.7	-2.0	-4.1

Source: World Bank: "World Development Report 1996" - 1994 GDP, GDP per capita, population and land area.
EBRD: GDP growth rates 1994-1995.

Table A.3.7 TRACECA COUNTRIES - TOTAL VEHICLE OPERATING COSTS AND GROSS DOMESTIC PRODUCT

Country	Length of main road network (a) (km)	Vehicle km on the main road network (million)	Total Vehicle Operating Costs (US \$ million) @ average roughness level			Gross Domestic Product (US\$ million)	Total Main Road Vehicle Operating Costs as % of GDP with roughness at		
			IRI 3 (Good)	IRI 6 (Fair)	IRI 8 (Poor)		IRI 3 (Good)	IRI 6 (Fair)	IRI 8 (Poor)
Armenia	3,147.8	1,970.0	308.7	353.5	404.0	2,789.5	11.1	12.7	14.5
Azerbaijan	4,689.0	4,496.0	967.3	1,094.7	1,236.0	2,939.0	32.9	37.2	42.1
Georgia	5,005.3	2,088.4	292.7	336.3	387.0	1,959.9	14.9	17.2	19.7
Kazakhstan	17,496.0	10,089.0	2,003.6	2,360.3	2,756.0	16,532.0	12.1	14.3	16.7
Kyrgyzstan	3,109.9	1,506.1	297.4	341.2	390.0	2,506.0	11.9	13.6	15.6
Tajikistan	1,785.2	620.6	146.5	166.0	188.0	1,767.9	8.3	9.4	10.6
Turkmenistan	7,682.6	3,545.4	841.4	971.7	1,112.0	4,898.2	17.2	19.8	22.7
Uzbekistan	21,825.0	10,466.7	2,635.4	3,008.9	3,418.0	21,077.8	12.5	14.3	16.2

Note: The GDP estimates are based on World Bank 1994 population and per capita GDP estimates, EBRD estimates of GDP growth between 1994 and 1995 and World Bank population growth estimates.

Source: World Bank-"World Development Report 1996".
Consultant's estimates of total vehicle operating costs.

Table A.3.6 (continued) UZBEKISTAN - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Index (IRI 3 = 100)	
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck		Total
3	422.1	174.1	159.3	894.4	413.5	572.1	2,635.4	100.0
4	446.4	184.8	161.7	941.1	431.8	590.1	2,756.0	104.6
5	472.3	196.3	164.4	988.5	450.4	608.5	2,880.5	109.3
6	499.9	208.6	167.3	1,036.8	469.2	627.1	3,008.9	114.2
7	529.1	221.8	170.3	1,085.7	488.3	646.1	3,141.3	119.2
8	559.9	235.7	173.5	1,135.4	507.6	665.4	3,277.6	124.4
9	592.4	250.5	176.9	1,185.9	527.1	685.1	3,417.9	129.7
10	626.5	266.0	180.5	1,237.1	546.9	705.0	3,562.1	135.2
11	662.2	282.4	184.3	1,289.1	566.9	725.3	3,710.2	140.8
12	699.6	299.6	188.2	1,341.8	587.1	745.9	3,862.2	146.6
13	738.6	317.6	192.3	1,395.3	607.6	766.8	4,018.1	152.5
14	779.2	336.4	196.6	1,449.6	628.2	788.0	4,178.0	158.5
15	821.5	356.0	201.1	1,504.5	649.2	809.5	4,341.8	164.8

Note: Excluding urban and local / district roads

IRI 3 m/km = good.

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimates

Table A.3.6 (continued) TURKMENISTAN - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Total	Index (IRI 3 = 100)
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck		
3	105.7	27.6	71.4	161.5	63.6	411.7	841.4	100.0
4	113.7	29.8	72.8	172.3	67.3	427.9	883.7	105.0
5	122.3	32.2	74.3	183.2	71.0	444.3	927.2	110.2
6	131.3	34.7	75.8	194.1	74.8	461.0	971.7	115.5
7	140.9	37.3	77.5	205.2	78.7	477.9	1,017.4	120.9
8	150.9	40.1	79.3	216.4	82.5	495.0	1,064.3	126.5
9	161.5	43.1	81.2	227.6	86.4	512.4	1,112.2	132.2
10	172.5	46.2	83.2	239.0	90.4	530.0	1,161.3	138.0
11	184.1	49.5	85.3	250.4	94.4	547.9	1,211.5	144.0
12	196.2	52.9	87.5	262.0	98.4	566.0	1,262.9	150.1
13	208.7	56.4	89.9	273.6	102.4	584.3	1,315.4	156.3
14	221.8	60.1	92.3	285.3	106.5	602.9	1,369.0	162.7
15	235.3	64.0	94.9	297.2	110.7	621.7	1,423.7	169.2

Note: Excluding urban and local / district roads

IRI 3 m/km = good.

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimates

Table A.3.6 (continued) TAJIKISTAN - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Total	Index (IRI 3 = 100)
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck		
3	38.8	5.6	12.4	36.0	33.4	20.2	146.5	100.0
4	41.0	6.0	12.6	37.5	34.7	20.8	152.7	104.3
5	43.4	6.4	12.8	39.0	36.1	21.5	159.2	108.7
6	45.9	6.7	13.1	40.6	37.5	22.1	166.0	113.3
7	48.6	7.2	13.3	42.2	38.9	22.7	173.0	118.1
8	51.4	7.6	13.6	43.8	40.3	23.4	180.2	123.1
9	54.4	8.1	13.9	45.5	41.8	24.1	187.8	128.2
10	57.6	8.6	14.2	47.2	43.3	24.8	195.5	133.5
11	60.8	9.1	14.5	48.9	44.8	25.5	203.6	139.0
12	64.3	9.7	14.8	50.7	46.3	26.2	211.9	144.7
13	67.8	10.2	15.1	52.4	47.8	26.9	220.4	150.5
14	71.5	10.8	15.5	54.3	49.4	27.7	229.2	156.5
15	75.4	11.5	15.9	56.1	51.0	28.4	238.3	162.7

Note: Excludes urban and local / district roads

IRI 3 m/km = good

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimate

Table A.3.6 (continued) KYRGYZ REPUBLIC - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)							Index (IRI 3 = 100)
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck	Total	
3	79.5	16.9	34.5	71.4	44.0	51.0	297.4	100.0
4	84.4	18.2	35.2	74.6	46.1	52.9	311.4	104.7
5	89.7	19.6	35.9	77.9	48.2	54.8	326.0	109.6
6	95.2	21.1	36.6	81.2	50.3	56.7	341.2	114.7
7	101.1	22.7	37.4	84.6	52.5	58.7	357.0	120.0
8	107.2	24.4	38.3	88.0	54.7	60.6	373.3	125.5
9	113.7	26.2	39.1	91.5	56.9	62.7	390.2	131.2
10	120.5	28.1	40.1	95.1	59.2	64.7	407.7	137.1
11	127.6	30.1	41.0	98.7	61.5	66.8	425.8	143.2
12	135.1	32.1	42.1	102.4	63.8	69.0	444.4	149.5
13	142.8	34.3	43.1	106.1	66.2	71.1	463.7	155.9
14	150.8	36.5	44.2	110.0	68.5	73.3	483.5	162.6
15	159.2	38.9	45.4	113.8	70.9	75.6	503.8	169.4

Note: Excludes urban and local / district roads

IRI 3 m/km = good

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimate

Table A.3.6 (continued) KAZAKHSTAN - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Index (IRI 3 = 100)	
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck		Total
3	593.0	75.9	52.2	465.4	559.9	257.1	2,003.6	100.0
4	637.2	81.0	53.1	494.2	584.8	266.2	2,116.4	105.6
5	687.7	86.7	54.2	522.9	610.7	275.2	2,237.3	111.7
6	738.2	92.4	55.3	553.5	636.5	284.6	2,360.3	117.8
7	788.6	98.6	56.6	584.0	662.4	294.3	2,484.4	124.0
8	845.4	105.3	57.9	614.6	688.3	303.9	2,615.3	130.5
9	908.5	112.0	59.3	646.9	715.2	314.0	2,755.8	137.5
10	971.6	119.7	60.8	679.3	742.1	324.0	2,897.5	144.6
11	1,034.7	127.5	62.5	711.6	770.0	334.0	3,040.2	151.7
12	1,104.1	135.2	64.2	744.0	798.0	344.3	3,189.7	159.2
13	1,173.5	144.0	65.9	778.1	825.9	355.0	3,342.4	166.8
14	1,249.2	152.7	67.9	812.2	854.9	365.6	3,502.6	174.8
15	1,324.9	162.0	69.9	846.4	883.9	376.3	3,663.4	182.8

Note: Excludes urban and local / district roads

IRI 3 m/km = good

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimate

Table A.3.6 (continued) GEORGIA - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Index (IRI 3 = 100)	
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck		Total
3	141.5	10.8	55.5	20.2	39.4	25.3	292.7	100.0
4	150.0	11.5	56.3	21.4	41.2	26.2	306.5	104.7
5	159.1	12.2	57.2	22.6	42.9	27.1	321.1	109.7
6	168.7	13.0	58.1	23.8	44.8	27.9	336.3	114.9
7	178.9	13.8	59.1	25.1	46.6	28.8	352.3	120.4
8	189.8	14.7	60.1	26.3	48.5	29.7	369.1	126.1
9	201.1	15.6	61.2	27.6	50.4	30.7	386.6	132.1
10	213.1	16.6	62.3	28.9	52.3	31.6	404.8	138.3
11	225.7	17.6	63.5	30.2	54.2	32.6	423.8	144.8
12	238.8	18.7	64.7	31.6	56.2	33.5	443.5	151.5
13	252.5	19.8	66.0	32.9	58.2	34.5	464.0	158.5
14	266.8	21.0	67.3	34.3	60.2	35.5	485.1	165.7
15	281.7	22.3	68.7	35.7	62.2	36.5	507.1	173.2

Note: Excludes urban and local / district roads

IRI 3 m/km = good

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimate

Table A.3.6 (continued) AZERBAIJAN - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						TOTAL	Index (IRI 3 = 100)
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck		
3	200.2	74.2	103.7	231.9	128.8	228.5	967.3	100.0
4	211.4	78.0	105.2	242.7	134.3	236.6	1,008.2	104.2
5	223.4	82.1	106.9	253.6	139.8	244.7	1,050.6	108.6
6	236.2	86.6	108.7	264.7	145.4	253.0	1,094.7	113.2
7	249.7	91.3	110.6	276.0	151.1	261.4	1,140.3	117.9
8	264.1	96.4	112.6	287.5	156.9	270.0	1,187.4	122.8
9	279.2	101.7	114.7	299.1	162.8	278.7	1,236.2	127.8
10	295.0	107.4	117.0	310.9	168.7	287.6	1,286.5	133.0
11	311.7	113.4	119.3	322.9	174.7	296.5	1,338.4	138.4
12	329.1	119.7	121.7	335.0	180.8	305.6	1,391.9	143.9
13	347.2	126.3	124.3	347.3	187.0	314.9	1,447.0	149.6
14	366.2	133.2	126.9	359.8	193.2	324.3	1,503.6	155.4
15	385.9	140.5	129.7	372.4	199.6	333.8	1,561.8	161.5

Note: Excludes urban and local / district roads

IRI 3 m/km = good

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimate

Table A.3.6 ARMENIA - TOTAL VEHICLE OPERATING COSTS ON MAIN ROADS AT DIFFERENT ROUGHNESS LEVELS

Roughness IRI (m/km)	Total Vehicle Operating Costs (US\$ million)						Total	Index (IRI 3 = 100)
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck		
3	107.9	19.9	42.3	39.1	71.5	28.0	308.7	100.0
4	114.7	20.9	43.0	40.8	74.6	28.9	323.0	104.6
5	122.1	21.9	43.8	42.5	77.8	29.9	337.9	109.5
6	129.8	23.0	44.5	44.3	81.0	30.9	353.5	114.5
7	138.1	24.2	45.3	46.1	84.2	31.8	369.8	119.8
8	146.8	25.4	46.2	47.9	87.5	32.8	386.7	125.3
9	156.0	26.8	47.1	49.8	90.9	33.9	404.4	131.0
10	165.6	28.2	48.1	51.7	94.2	34.9	422.7	136.9
11	175.7	29.7	49.0	53.6	97.7	35.9	441.6	143.1
12	186.3	31.2	50.1	55.6	101.1	37.0	461.3	149.4
13	197.3	32.9	51.1	57.6	104.6	38.1	481.6	156.0
14	208.8	34.6	52.2	59.6	108.2	39.2	502.6	162.8
15	220.7	36.4	53.4	61.7	111.7	40.3	524.2	169.8

Note: Excluding urban and local / district roads

IRI 3 m/km = good.

IRI 5-6 m/km = fair

IRI 7-8 m/km = poor

IRI 10+ m/km = bad / very bad

Source: Consultant's estimates

CONTENTS

Annex 1 EXTRACT FROM THE TERMS OF REFERENCE

Annex 3 VEHICLE OPERATING COSTS

Table A.3.1	Representative vehicle models selected for vehicle operating cost analysis
Table A.3.2	Data inputs for vehicle operating costs analysis
Table A.3.3	Percentage breakdown of vehicle operating costs
Table A.3.4	Relative significance of vehicle operating cost components
Table A.3.5	Vehicle operating costs by pavement roughness level
Table A.3.6	Total vehicle operating costs on main roads at different roughness levels
Table A.3.7	TRACECA countries - total vehicle operating costs and Gross Domestic Product
Table A.3.8	TRACECA countries - background economic data
Table A.3.9	Azerbaijan and Kyrgyzstan - Base vehicle operating costs and passenger and goods delay costs

Annex 4 ECONOMIC IMPACT OF ROAD MAINTENANCE

Table A.4.1	Axle loading and vehicle weights by vehicle type in TRACECA countries
Table A.4.2	Pavement damage factors for different vehicle types in the TRACECA countries
Table A.4.3	Pavement damage factors for the heaviest ten percent of goods vehicles in each category
Table A.4.4	Average pavement damage factors per payload tonne
Table A.4.5	Summary of equivalent standard axles by vehicle type by country

Annex 6 ROAD USE COSTS AND EXPENDITURE

Table A.6.1	Public road networks by design category
Table A.6.2	C.I.S. republics - geometric and pavement design standards
Table A.6.3	Armenia - analysis of benkelman beam survey results
Table A.6.4	Average daily traffic and vehicle kilometres by road design category
Table A.6.5	Equivalent standard axle kilometres by road design category
Table A.6.6	Analysis of annual road use costs
Table A.6.7	Comparison of road rehabilitation and maintenance costs - Eastern Europe and C.I.S. countries

Annex 7 ROAD USER CHARGES AND COST RECOVERY

Table A.7.1	Road user charges required to cover fixed and variable road use costs
-------------	---

Table A.3.5 (continued) UZBEKISTAN - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category	Coefficients			R ²	Standard Error
	a	b	c		
Car	8.731890E-02	4.520043E-03	1.985542E-04	0.99807	2.349358E-03
Utility Vehicle (Minibus / Pickup)	1.273387E-01	6.833320E-03	3.511330E-04	0.99773	4.177064E-03
Large Bus	4.182766E-01	5.072220E-03	2.484320E-04	0.99987	7.346437E-04
2 - axle Truck (Medium)	2.283498E-01	1.326489E-02	1.132072E-04	0.99998	4.305034E-04
3 - axle Truck (Heavy)	4.386529E-01	2.140778E-02	1.412576E-04	1.00000	2.862803E+00
> 3 - axle Truck (Articulated)	7.490906E-01	2.435702E-02	2.305894E-04	0.99997	8.834298E-04

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.103	0.151	0.436	0.269	0.504	0.824
4	0.109	0.160	0.443	0.283	0.527	0.850
5	0.115	0.170	0.450	0.298	0.549	0.877
6	0.122	0.181	0.458	0.312	0.572	0.904
7	0.129	0.192	0.466	0.327	0.595	0.931
8	0.136	0.204	0.475	0.342	0.619	0.959
9	0.144	0.217	0.484	0.357	0.643	0.987
10	0.152	0.231	0.494	0.372	0.667	1.016
11	0.161	0.245	0.504	0.388	0.691	1.045
12	0.170	0.260	0.515	0.404	0.716	1.075
13	0.180	0.276	0.526	0.420	0.741	1.105
14	0.190	0.292	0.538	0.436	0.766	1.135
15	0.200	0.309	0.550	0.453	0.792	1.166

Table A.3.5 (continued) TURKMENISTAN - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category		Coefficients			R ²	Standard Error
		a	b	c		
Car		5.625183E-02	4.186225E-03	1.669899E-04	0.99737	2.424083E-03
Utility Vehicle	(Minibus / Pickup)	6.816704E-02	5.231963E-03	2.344881E-04	0.99743	3.165123E-03
Large Bus		3.214417E-01	4.665640E-03	2.534994E-04	0.99984	7.798421E-04
2 - axle Truck	(Medium)	1.793641E-01	1.443552E-02	6.628018E-05	0.99998	3.920054E-04
3 - axle Truck	(Heavy)	3.233846E-01	2.199485E-02	1.181139E-04	0.99999	5.014550E-04
> 3 - axle Truck	(Articulated)	5.840736E-01	2.464410E-02	1.889400E-04	0.99998	7.598816E-04

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.070	0.086	0.338	0.223	0.390	0.660
4	0.076	0.093	0.344	0.238	0.413	0.686
5	0.081	0.100	0.351	0.253	0.436	0.712
6	0.087	0.108	0.359	0.268	0.460	0.739
7	0.094	0.116	0.367	0.284	0.483	0.766
8	0.100	0.125	0.375	0.299	0.507	0.793
9	0.107	0.134	0.384	0.315	0.531	0.821
10	0.115	0.144	0.393	0.330	0.555	0.849
11	0.123	0.154	0.403	0.346	0.580	0.878
12	0.131	0.165	0.414	0.362	0.604	0.907
13	0.139	0.176	0.425	0.378	0.629	0.936
14	0.148	0.187	0.436	0.394	0.654	0.966
15	0.157	0.199	0.448	0.411	0.680	0.996

Table A.3.5 (continued) TAJIKISTAN - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category	Coefficients			R ²	Standard Error
	a	b	c		
Car	8.651241E-02	4.531006E-03	1.940690E-04	0.99811	2.301296E-03
Utility Vehicle (Minibus / Pickup)	1.395357E-01	7.321529E-03	3.829289E-04	0.99777	4.475796E-03
Large Bus	5.158381E-01	6.908082E-03	3.112893E-04	0.99995	5.790303E-04
2 - axle Truck (Medium)	2.997984E-01	1.300297E-02	1.560857E-04	0.99997	5.312163E-04
3 - axle Truck (Heavy)	5.201688E-01	2.233171E-02	1.966760E-04	0.99999	4.505866E-04
> 3 - axle Truck (Articulated)	9.145111E-01	2.800398E-02	3.196092E-04	0.99997	1.166075E-03

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.102	0.165	0.539	0.340	0.589	1.001
4	0.108	0.175	0.548	0.354	0.613	1.032
5	0.114	0.186	0.558	0.369	0.637	1.063
6	0.121	0.197	0.568	0.383	0.661	1.094
7	0.128	0.210	0.579	0.398	0.686	1.126
8	0.135	0.223	0.591	0.414	0.711	1.159
9	0.143	0.236	0.603	0.429	0.737	1.192
10	0.151	0.251	0.616	0.445	0.763	1.227
11	0.160	0.266	0.629	0.462	0.790	1.261
12	0.169	0.283	0.644	0.478	0.816	1.297
13	0.178	0.299	0.658	0.495	0.844	1.333
14	0.188	0.317	0.674	0.512	0.871	1.369
15	0.198	0.336	0.689	0.530	0.899	1.406

Table A.3.5 (continued) KYRGYZ REPUBLIC - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category	Coefficients			R ²	Standard Error
	a	b	c		
Car	7.527203E-02	4.336024E-03	1.763690E-04	0.99776	2.337883E-03
Utility Vehicle (Minibus / Pickup)	9.961271E-02	7.367655E-03	3.435756E-04	0.99752	4.468716E-03
Large Bus	4.466620E-01	6.646871E-03	3.127660E-04	0.99993	6.577228E-04
2 - axle Truck (Medium)	2.403223E-01	1.148466E-02	1.196524E-04	0.99996	5.450614E-04
3 - axle Truck (Heavy)	4.106373E-01	2.150430E-02	1.576130E-04	1.00000	2.763484E-04
> 3 - axle Truck (Articulated)	7.428843E-01	2.842847E-02	2.728295E-04	0.99998	8.653227E-04

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.090	0.125	0.469	0.276	0.477	0.831
4	0.095	0.135	0.478	0.288	0.499	0.861
5	0.101	0.145	0.488	0.301	0.522	0.892
6	0.108	0.156	0.498	0.314	0.545	0.923
7	0.114	0.168	0.509	0.327	0.569	0.955
8	0.121	0.181	0.520	0.340	0.593	0.988
9	0.129	0.194	0.532	0.353	0.617	1.021
10	0.136	0.208	0.544	0.367	0.641	1.054
11	0.144	0.222	0.558	0.381	0.666	1.089
12	0.153	0.237	0.571	0.395	0.691	1.123
13	0.161	0.253	0.586	0.410	0.717	1.159
14	0.171	0.270	0.601	0.425	0.743	1.194
15	0.180	0.287	0.617	0.440	0.769	1.231

Table A.3.5 (continued) KAZAKHSTAN - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVELS

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category		Coefficients			R ²	Standard Error
		a	b	c		
Car		7.455975E-02	5.704328E-03	2.198189E-04	0.99774	3.007956E-03
Utility Vehicle	(Minibus / Pickup)	1.216896E-01	7.341310E-03	3.657943E-04	0.99767	4.467152E-03
Large Bus		4.577310E-01	5.636515E-03	4.403900E-04	0.99997	5.303390E-04
2 - axle Truck	(Medium)	2.118114E-01	1.518606E-02	1.401869E-04	0.99999	3.787132E-04
3 - axle Truck	(Heavy)	4.715226E-01	2.275477E-02	1.827899E-04	0.99999	6.072921E-04
> 3 - axle Truck	(Articulated)	7.143817E-01	2.636025E-02	2.460973E-04	0.99997	1.039391E-03

Roughness IRI (m/km)	Economic Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.094	0.147	0.479	0.259	0.541	0.796
4	0.101	0.157	0.487	0.275	0.565	0.824
5	0.109	0.168	0.497	0.291	0.590	0.852
6	0.117	0.179	0.507	0.308	0.615	0.881
7	0.125	0.191	0.519	0.325	0.640	0.911
8	0.134	0.204	0.531	0.342	0.665	0.941
9	0.144	0.217	0.544	0.360	0.691	0.972
10	0.154	0.232	0.558	0.378	0.717	1.003
11	0.164	0.247	0.573	0.396	0.744	1.034
12	0.175	0.262	0.589	0.414	0.771	1.066
13	0.186	0.279	0.605	0.433	0.798	1.099
14	0.198	0.296	0.623	0.452	0.826	1.132
15	0.210	0.314	0.641	0.471	0.854	1.165

Table A.3.5 (continued) GEORGIA - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVELS

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category		Coefficients			R ²	Standard Error
		a	b	c		
Car		7.297534E-02	3.936087E-03	1.772834E-04	0.99793	2.144824E-03
Utility Vehicle	(Minibus / Pickup)	1.150720E-01	6.477818E-03	3.181135E-04	0.99763	3.942677E-03
Large Bus		3.587424E-01	4.131431E-03	1.794090E-04	0.99985	5.884039E-04
2 - axle Truck	(Medium)	1.758005E-01	1.200502E-02	8.973174E-05	0.99999	3.066979E-04
3 - axle Truck	(Heavy)	3.863084E-01	1.898494E-02	1.394170E-04	0.99999	3.762460E-04
>3 - axle Truck	(Articulated)	5.856887E-01	2.068022E-02	1.814735E-04	0.99997	7.549632E-04

Roughness IRI (m/km)	Economic Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck
3	0.086	0.137	0.373	0.213	0.445	0.649
4	0.092	0.146	0.378	0.225	0.464	0.671
5	0.097	0.155	0.384	0.238	0.485	0.694
6	0.103	0.165	0.390	0.251	0.505	0.716
7	0.109	0.176	0.396	0.264	0.526	0.739
8	0.116	0.187	0.403	0.278	0.547	0.763
9	0.123	0.199	0.410	0.291	0.568	0.787
10	0.130	0.212	0.418	0.305	0.590	0.811
11	0.138	0.225	0.426	0.319	0.612	0.835
12	0.146	0.239	0.434	0.333	0.634	0.860
13	0.154	0.253	0.443	0.347	0.657	0.885
14	0.163	0.268	0.452	0.361	0.679	0.911
15	0.172	0.284	0.461	0.376	0.702	0.937

Table A.3.5 (continued) AZERBAIJAN - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$

Where VOC = Vehicle operating cost in US\$ / vehicle km

IRI = Pavement roughness (m/km)

Representative Vehicle Category	Coefficients			R ²	Standard Error
	a	b	c		
Car	8.699331E-02	4.334294E-03	1.962563E-04	0.99802	2.313607E-03
Utility Vehicle (Minibus / Pickup)	1.068999E-01	4.483537E-03	2.576305E-04	0.99787	2.818336E-03
Large Bus	3.598936E-01	4.368106E-03	1.925016E-04	0.99979	7.422111E-04
2 - axle Truck (Medium)	1.886138E-01	9.560573E-03	8.050844E-05	0.99997	3.872247E-04
3 - axle Truck (Heavy)	4.332303E-01	1.984565E-02	1.538113E-04	0.99998	5.459150E-04
> 3 - axle Truck (Articulated)	6.345324E-01	2.334508E-02	2.090501E-04	0.99998	8.143106E-04

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	> 3-axle Truck
3	0.102	0.123	0.375	0.218	0.494	0.706
4	0.107	0.129	0.380	0.228	0.515	0.731
5	0.114	0.136	0.387	0.238	0.536	0.756
6	0.120	0.143	0.393	0.249	0.558	0.782
7	0.127	0.151	0.400	0.259	0.580	0.808
8	0.134	0.159	0.407	0.270	0.602	0.835
9	0.142	0.168	0.415	0.281	0.624	0.862
10	0.150	0.177	0.423	0.292	0.647	0.889
11	0.158	0.187	0.431	0.304	0.670	0.917
12	0.167	0.198	0.440	0.315	0.694	0.945
13	0.177	0.209	0.449	0.327	0.717	0.973
14	0.186	0.220	0.459	0.338	0.741	1.002
15	0.196	0.232	0.469	0.350	0.766	1.032

Table A.3.5 ARMENIA - VEHICLE OPERATING COSTS BY PAVEMENT ROUGHNESS LEVEL

Relationship Between Vehicle Operating Costs and Pavement Roughness (IRI)

For each vehicle category the model is of the form $VOC = a + (b \cdot IRI) + (c \cdot IRI^2)$
 Where VOC = Vehicle operating cost in US\$ / vehicle km
 IRI = Pavement roughness (m/km)

Representative Vehicle Category		Coefficients			R ²	Standard Error
		a	b	c		
Car		6.684633E-02	3.896476E-03	1.715079E-04	0.99809	2.016702E-03
Utility Vehicle	(Minibus / Pickup)	9.929030E-02	3.913661E-03	2.147540E-04	0.99799	2.328003E-03
Large Bus		3.788748E-01	5.101956E-03	1.960511E-04	0.99988	6.107329E-04
2 - axle Truck	(Medium)	2.104864E-01	9.690884E-03	1.054943E-04	0.99997	4.048614E-04
3 - axle Truck	(Heavy)	4.319778E-01	2.061748E-02	1.449871E-04	1.00000	2.516544E-04
> 3 - axle Truck	(Articulated)	7.666917E-01	2.661615E-02	2.463862E-04	0.99999	7.349606E-04

Roughness IRI (m/km)	Vehicle Operating Costs (US\$/km)					
	Car	Utility Vehicle	Large Bus	2-axle Truck	3-axle Truck	>3-axle Truck
3	0.080	0.113	0.396	0.241	0.495	0.849
4	0.085	0.118	0.402	0.251	0.517	0.877
5	0.091	0.124	0.409	0.262	0.539	0.906
6	0.096	0.131	0.417	0.272	0.561	0.935
7	0.103	0.137	0.424	0.283	0.583	0.965
8	0.109	0.144	0.432	0.295	0.606	0.995
9	0.116	0.152	0.441	0.306	0.629	1.026
10	0.123	0.160	0.449	0.318	0.653	1.057
11	0.130	0.168	0.459	0.330	0.676	1.089
12	0.138	0.177	0.468	0.342	0.700	1.122
13	0.146	0.186	0.478	0.354	0.725	1.154
14	0.155	0.196	0.489	0.367	0.749	1.188
15	0.164	0.206	0.500	0.380	0.774	1.221

Table A.3.4 RELATIVE SIGNIFICANCE OF VEHICLE OPERATING COST COMPONENTS

Vehicle type	Pavement roughness (IRI m/km)	Percentage Breakdown of Total Vehicle Operating Cost									Total V.O.C
		Fuel	Lubricant	Tyres	Crew	Maintenance parts	Maintenance labour	Depreciation	Interest	Overheads	
Armenia											
Car	3	34.4	3.4	3.7	0.0	17.9	1.0	22.2	17.3	0.0	100.0
Car	12	19.3	3.4	4.2	0.0	47.4	1.3	13.2	11.2	0.0	100.0
Utility	3	53.4	2.4	2.9	3.4	11.5	0.7	10.3	6.6	8.7	100.0
Utility	12	39.0	2.6	3.7	2.8	33.6	1.1	6.9	4.8	5.6	100.0
Bus	3	34.1	1.2	28.5	1.8	11.0	0.7	10.8	6.7	5.0	100.0
Bus	12	30.0	1.5	30.5	1.9	14.1	1.5	9.7	6.6	4.3	100.0
Truck 2 axle	3	39.6	2.0	20.6	3.4	10.3	1.1	6.7	5.8	10.4	100.0
Truck 2 axle	12	30.5	2.0	18.6	3.2	27.0	1.6	5.1	4.8	7.3	100.0
Truck 3 axle	3	32.5	1.0	24.2	1.4	17.8	0.7	10.6	6.7	5.0	100.0
Truck 3 axle	12	23.2	1.0	21.3	1.4	34.5	0.9	8.2	6.0	3.6	100.0
Truck >3 axle	3	30.2	0.9	30.0	1.7	17.1	1.0	9.2	6.8	2.9	100.0
Truck >3 axle	12	24.2	0.9	28.1	1.8	27.6	1.2	7.6	6.5	2.2	100.0
Kyrgyzstan											
Car	3	19.2	3.3	4.2	0.0	16.1	2.3	27.2	27.7	0.0	100.0
Car	12	11.0	3.3	4.8	0.0	43.3	3.1	16.5	18.0	0.0	100.0
Utility	3	30.7	2.3	4.4	7.2	20.0	1.8	14.4	11.4	7.8	100.0
Utility	12	18.7	2.1	4.6	5.1	48.2	2.2	8.0	6.9	4.2	100.0
Bus	3	20.5	1.1	37.2	4.0	11.1	1.7	12.9	8.9	2.6	100.0
Bus	12	17.6	1.3	38.9	4.0	13.8	3.4	10.9	8.1	2.0	100.0
Truck 2 axle	3	21.5	1.9	24.5	7.1	9.6	2.4	13.0	12.0	8.0	100.0
Truck 2 axle	12	16.6	1.8	22.2	6.6	24.9	3.3	9.5	9.5	5.6	100.0
Truck 3 axle	3	19.2	1.1	32.3	3.3	17.9	2.1	11.0	8.5	4.6	100.0
Truck 3 axle	12	13.3	1.1	27.9	3.4	33.8	2.4	8.0	6.9	3.2	100.0
Truck >3 axle	3	18.9	1.0	41.4	4.1	16.4	2.9	6.6	6.0	2.7	100.0
Truck >3 axle	12	14.8	0.9	38.4	4.2	25.9	3.2	5.2	5.4	2.0	100.0
Turkmenistan											
Car	3	11.3	1.4	5.6	0.0	20.3	2.2	35.9	23.4	0.0	100.0
Car	12	5.9	1.3	6.0	0.0	52.5	2.7	18.7	13.4	0.0	100.0
Utility	3	22.4	1.1	4.5	9.1	21.0	1.9	18.3	10.3	11.3	100.0
Utility	12	13.4	1.0	4.7	6.1	50.3	2.3	10.1	6.1	6.0	100.0
Bus	3	9.3	0.5	33.4	4.0	12.6	1.7	21.4	10.5	6.5	100.0
Bus	12	7.9	0.6	0.3	4.1	15.6	3.3	18.8	9.9	5.3	100.0
Truck 2 axle	3	10.5	0.8	30.8	7.3	16.9	2.5	11.7	8.4	11.2	100.0
Truck 2 axle	12	7.0	0.7	24.4	5.8	38.7	3.0	7.5	5.9	6.9	100.0
Truck 3 axle	3	9.6	0.5	30.6	3.4	23.7	1.9	16.5	7.5	6.4	100.0
Truck 3 axle	12	6.3	0.4	24.7	3.1	41.9	2.1	11.6	5.8	4.1	100.0
Truck >3 axle	3	9.2	0.4	42.7	4.2	18.8	2.6	11.9	6.5	3.8	100.0
Truck >3 axle	12	7.0	0.4	38.5	4.1	29.1	2.8	9.5	5.9	2.8	100.0

Note: Example taken from three countries with relatively high, medium and low fuel prices.

Source: Consultant's estimates based on use of HDM III Vehicle Operating Cost Sub Model

Table A.3.3 PERCENTAGE BREAKDOWN OF VEHICLE OPERATING COSTS

Vehicle Operating Cost Component	% of Total Vehicle Operating Costs					
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck >3 axle
KYRGYZ REPUBLIC						
Fuel	17.74	28.16	19.97	20.03	17.57	17.82
Lubricants	3.46	2.43	1.18	1.91	1.10	0.99
Tyres	4.63	4.85	37.65	23.79	31.01	40.62
Crew time	0.00	6.62	3.95	6.74	3.17	3.99
Maintenance labour	2.51	1.96	2.02	2.80	2.27	3.04
Maintenance parts	21.08	25.67	11.70	14.13	22.70	19.16
Depreciation	25.03	12.97	12.44	12.06	10.10	6.17
Interest	25.55	10.32	8.63	11.19	7.87	5.73
Overheads	0.00	7.02	2.46	7.33	4.22	2.47
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
TAJIKISTAN						
Fuel	30.42	43.45	33.30	33.02	30.95	31.64
Lubricants	3.07	1.89	1.03	1.56	0.90	0.83
Tyres	3.97	3.55	31.55	26.15	26.72	35.59
Crew time	0.00	7.74	3.09	5.14	3.62	3.50
Maintenance labour	2.04	1.37	1.58	2.17	1.67	2.24
Maintenance parts	20.70	19.88	10.16	12.86	19.77	15.23
Depreciation	21.44	9.90	10.94	7.39	7.79	4.91
Interest	18.36	6.77	6.19	5.73	5.13	3.97
Overheads	0.00	5.46	2.15	5.98	3.46	2.07
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
TURKMENISTAN						
Fuel	10.30	20.50	9.09	9.35	8.68	8.58
Lubricants	1.44	1.17	0.55	0.76	0.44	0.42
Tyres	6.10	4.96	33.77	28.64	28.78	41.57
Crew time	0.00	8.37	3.97	6.68	3.18	4.05
Maintenance labour	2.37	2.11	1.99	2.79	2.02	2.73
Maintenance parts	26.16	26.90	13.35	23.95	29.45	21.80
Depreciation	32.42	16.48	20.82	10.39	14.89	11.15
Interest	21.22	9.35	10.20	7.57	6.82	6.18
Overheads	0.00	10.18	6.28	9.89	5.74	3.52
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
UZBEKISTAN						
Fuel	27.56	43.92	30.38	32.51	29.52	29.84
Lubricants	2.85	1.92	1.19	1.80	0.97	0.94
Tyres	3.94	3.87	26.35	23.42	22.84	30.68
Crew time	0.00	3.82	2.76	4.88	2.25	2.92
Maintenance labour	1.47	1.09	1.37	2.09	1.44	1.97
Maintenance parts	21.04	20.46	10.08	18.34	22.93	17.58
Depreciation	26.07	12.26	15.72	7.91	11.25	8.87
Interest	17.07	6.69	7.70	5.69	5.15	4.91
Overheads	0.00	5.96	4.45	3.37	3.64	2.28
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00

Note: Financial vehicle operating costs

Source: Consultant's estimates

Table A.3.3 PERCENTAGE BREAKDOWN OF VEHICLE OPERATING COSTS

Vehicle Operating Cost Component	% of Total Vehicle Operating Costs					
	Car	Utility	Large Bus	Truck 2 axle	Truck 3 axle	Truck > 3 axle
ARMENIA						
Fuel	31.66	50.69	33.34	36.86	30.05	28.60
Lubricants	3.61	2.63	1.31	2.05	0.99	0.91
Tyres	4.08	3.30	28.99	20.00	23.30	29.51
Crew time	0.00	3.23	1.79	3.27	1.35	1.68
Maintenance labour	1.11	0.83	0.87	1.32	0.81	1.10
Maintenance parts	23.36	15.37	11.69	15.22	22.71	20.08
Depreciation	20.26	9.60	10.53	6.24	9.81	8.77
Interest	15.91	6.22	6.58	5.47	6.33	6.58
Overheads	0.00	8.14	4.89	9.57	4.64	2.76
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
AZERBAIJAN						
Fuel	25.63	43.24	16.63	17.08	14.81	16.15
Lubricants	2.71	2.27	1.31	2.12	0.94	1.03
Tyres	4.13	3.45	30.44	20.05	30.17	35.55
Crew time	0.00	2.97	2.62	3.66	1.53	2.22
Maintenance labour	0.97	0.85	0.95	1.56	0.88	1.43
Maintenance parts	20.75	17.08	8.45	16.63	19.78	19.57
Depreciation	25.69	13.89	23.82	19.59	17.53	12.86
Interest	20.12	8.80	10.59	8.81	9.69	8.54
Overheads	0.00	7.45	5.18	10.50	4.67	2.65
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
GEORGIA						
Fuel	23.67	36.27	26.41	25.55	24.53	26.41
Lubricants	3.25	2.03	1.35	2.17	1.07	1.15
Tyres	4.24	4.24	19.51	12.94	17.12	20.95
Crew time	0.00	2.02	1.84	2.55	1.18	1.27
Maintenance labour	0.80	0.54	0.76	1.22	0.71	1.13
Maintenance parts	21.99	21.64	12.47	23.46	23.58	21.62
Depreciation	24.48	16.40	19.96	11.92	16.03	14.59
Interest	21.57	10.32	12.49	9.67	10.63	9.26
Overheads	0.00	6.53	5.22	10.51	5.16	3.61
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00
KAZAKHSTAN						
Fuel	22.13	32.34	18.71	20.88	21.07	20.28
Lubricants	2.85	1.84	1.02	1.74	0.86	0.92
Tyres	4.03	3.94	31.77	17.17	26.47	28.22
Crew time	0.00	13.52	14.59	13.27	8.89	8.89
Maintenance labour	5.72	3.94	4.56	7.77	4.64	7.08
Maintenance parts	25.59	20.71	8.21	20.03	19.34	17.67
Depreciation	23.69	11.41	10.52	6.33	9.87	9.02
Interest	16.00	6.22	5.59	4.23	4.62	4.98
Overheads	0.00	6.07	5.04	8.59	4.24	2.94
TOTAL	100.00	100.00	100.00	100.00	100.00	100.00

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	UZBEKISTAN					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	500	500	500	500	500	500
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	960	1,815	10,400	4,525	7,500	12,400
Load carried	kg	400	600	3,500	3,500	6,000	15,000
Maximum used driving power	metric HP	41	48	138	67	147	147
Maximum used braking power	metric HP	20	38	208	147	217	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.95	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	17,500	37,500	62,500	50,000	60,000	67,500
Average annual utilisation	hours	350	750	1,250	1,250	1,500	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.65	0.50	0.60	0.65
Average service life	Years	15	12	10	15	10	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	150,000	250,000	320,000	350,000	325,000	350,000
Passengers per vehicle		2	5	45			
Unit Costs							
New vehicle price	US\$	8,000	9,750	45,000	18,000	40,000	48,000
Fuel cost	US\$/litre	0.38	0.38	0.30	0.30	0.30	0.30
Lubricants cost	US\$/litre	1.40	1.40	1.40	1.40	1.40	1.40
New tyre cost	US\$	55	80	200	200	200	250
Crew time cost	US\$/hour		0.44	0.66	0.66	0.66	0.87
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.52	0.52	0.52	0.52	0.52	0.52
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	10	10	10	10	10	10
Overhead per vehicle km	US\$		0.010	0.022	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	TURKMENISTAN					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	500	500	500	500	500	500
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	960	1,320	10,400	4,525	7,500	12,400
Load carried	kg	400	1,400	3,500	4,000	6,000	15,000
Maximum used driving power	metric HP	41	40	138	67	147	147
Maximum used braking power	metric HP	20	32	208	147	217	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.9	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	17,500	37,500	62,500	50,000	60,000	67,500
Average annual utilisation	hours	350	750	1,250	1,250	1,500	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.65	0.50	0.60	0.65
Average service life	Years	15	12	10	15	10	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	131,250	225,000	312,500	375,000	300,000	337,500
Passengers per vehicle		2	5	45			
Unit Costs							
New vehicle price	US\$	7,000	7,500	46,500	20,000	42,000	49,000
Fuel cost	US\$/litre	0.10	0.10	0.07	0.07	0.07	0.07
Lubricants cost	US\$/litre	0.50	0.50	0.50	0.50	0.50	0.50
New tyre cost	US\$	60	60	200	200	200	275
Crew time cost	US\$/hour		0.49	0.74	0.74	0.74	0.98
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.59	0.59	0.59	0.59	0.59	0.59
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	10	10	10	10	10	10
Overhead per vehicle km	US\$		0.010	0.022	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	TAJIKISTAN					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	1,500	1,500	1,500	1,500	1,500	1,500
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	1,000	1,815	10,500	4,250	7,250	12,400
Load carried	kg	375	600	3,750	3,250	5,000	14,000
Maximum used driving power	metric HP	41	40	138	67	147	147
Maximum used braking power	metric HP	20	32	208	147	217	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.9	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	15,000	35,000	65,000	35,000	50,000	65,000
Average annual utilisation	hours	325	750	1,500	1,000	1,400	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.60	0.50	0.50	0.60
Average service life	Years	20	15	12	17	15	15
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	150,000	250,000	400,000	300,000	325,000	400,000
Passengers per vehicle		2	5	40			
Unit Costs							
New vehicle price	US\$	7,500	10,000	50,000	17,000	40,000	48,000
Fuel cost	US\$/litre	0.43	0.43	0.40	0.40	0.40	0.40
Lubricants cost	US\$/litre	1.50	1.50	1.50	1.50	1.50	1.50
New tyre cost	US\$	55	80	200	200	200	250
Crew time cost	US\$/hour		0.90	0.90	0.90	1.30	1.30
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.70	0.70	0.70	0.70	0.70	0.70
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	10	10	10	10	10	10
Overhead per vehicle km	US\$		0.010	0.022	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	KYRGYZ REPUBLIC					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	1,250	1,250	1,250	1,250	1,250	1,250
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	1,045	1,815	11,000	4,175	7,080	12,400
Load carried	kg	350	600	4,000	3,200	4,200	12,500
Maximum used driving power	metric HP	43	48	138	67	147	147
Maximum used braking power	metric HP	20	38	200	147	217	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.9	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.4	0.4	0.4	0.4	0.4	0.4
Maximum number of recaps		0.1	0.1	0.1	0.1	0.1	0.1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	13,500	33,750	67,500	26,250	43,750	60,000
Average annual utilisation	hours	300	750	1,500	750	1,250	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.50	0.50	0.50	0.55
Average service life	Years	20	15	12	17	15	15
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	135,000	253,125	405,000	223,125	328,125	450,000
Passengers per vehicle		2	5	32			
Unit Costs							
New vehicle price	US\$	7,000	10,000	50,000	17,000	37,500	48,500
Fuel cost	US\$/litre	0.22	0.22	0.20	0.20	0.20	0.20
Lubricants cost	US\$/litre	1.50	1.50	1.50	1.50	1.50	1.50
New tyre cost	US\$	57	85	200	150	200	250
Crew time cost	US\$/hour		0.65	0.97	0.97	0.97	1.30
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.78	0.78	0.78	0.78	0.78	0.78
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	12	12	12	12	12	12
Overhead per vehicle km	US\$		0.010	0.022	0.022	0.022	0.022
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	KAZAKHSTAN					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	300	300	300	300	300	300
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	1,200	1,815	11,100	3,700	8,200	12,400
Load carried	kg	400	600	3,200	3,500	7,500	15,000
Maximum used driving power	metric HP	43	48	100	100	147	147
Maximum used braking power	metric HP	20	38	200	200	255	436
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.9	0.9	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10-3 dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	22,000	40,000	75,000	60,000	60,000	67,500
Average annual utilisation	hours	400	800	1,500	1,500	1,500	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.65	0.55	0.65	0.65
Average service life	Years	15	12	10	15	10	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	165,000	240,000	375,000	450,000	300,000	337,500
Passengers per vehicle		2	5	32			
Unit Costs							
New vehicle price	US\$	8,525	9,500	37,115	18,000	37,293	47,541
Fuel cost	US\$/litre	0.29	0.29	0.20	0.20	0.20	0.20
Lubricants cost	US\$/litre	1.32	1.32	1.32	1.32	1.32	1.32
New tyre cost	US\$	53	80	265	146	225	225
Crew time cost	US\$/hour		1.53	3.05	2.29	2.59	2.59
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	1.83	1.83	1.83	1.83	1.83	1.83
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	10	10	10	10	10	10
Overhead per vehicle km	US\$		0.010	0.025	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	GEORGIA					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	7	7	7	7	7	7
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	500	500	500	500	500	500
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	960	1,815	11,100	4,525	8,200	12,400
Load carried	kg	300	400	3,000	2,400	6,000	15,000
Maximum used driving power	metric HP	41	39	100	67	147	147
Maximum used braking power	metric HP	20	29	197	147	255	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.95	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	17,000	30,000	60,000	40,000	40,000	50,000
Average annual utilisation	hours	350	750	1,250	1,150	1,000	1,250
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.50	0.50	0.60	0.65
Average service life	Years	17	12	10	15	12	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	135,000	200,000	350,000	400,000	250,000	325,000
Passengers per vehicle		2	5	32			
Unit Costs							
New vehicle price	US\$	7,000	9,750	45,000	18,000	40,000	48,000
Fuel cost	US\$/litre	0.28	0.28	0.21	0.21	0.21	0.21
Lubricants cost	US\$/litre	1.35	1.35	1.35	1.35	1.35	1.35
New tyre cost	US\$	50	80	200	150	200	250
Crew time cost	US\$/hour		0.20	0.30	0.30	0.30	0.30
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.24	0.24	0.24	0.24	0.24	0.24
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	12	12	12	12	12	12
Overhead per vehicle km	US\$		0.010	0.020	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	AZERBAIJAN					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	100	100	100	100	100	100
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	960	1,300	11,100	4,525	8,200	12,800
Load carried	kg	300	400	3,000	2,400	6,000	15,000
Maximum used driving power	metric HP	41	39	100	67	147	147
Maximum used braking power	metric HP	20	29	197	147	255	467
Desired speed	km/hour	98.30	94.90	93.40	88.80	88.80	84.10
Aerodynamic drag coefficient	dimensionless	0.45	0.46	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.95	0.95	1	1	1
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	17,500	29,250	62,500	40,000	40,000	56,250
Average annual utilisation	hours	350	650	1,250	1,000	1,000	1,250
Hourly utilisation ratio (HURATIO)	Fraction	0.40	0.50	0.60	0.50	0.60	0.65
Average service life	Years	15	8	7	8	8	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	131,250	175,500	218,750	240,000	200,000	281,250
Passengers per vehicle		2	5	32			
Unit Costs							
New vehicle price	US\$	7,800	7,020	38,500	15,438	40,300	50,000
Fuel cost	US\$/litre	0.35	0.35	0.14	0.14	0.14	0.14
Lubricants cost	US\$/litre	1.32	1.32	1.32	1.32	1.32	1.32
New tyre cost	US\$	57	57	200	150	250	250
Crew time cost	US\$/hour		0.28	0.43	0.43	0.43	0.57
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.34	0.34	0.34	0.34	0.34	0.34
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	12	12	12	12	12	12
Overhead per vehicle km	US\$		0.010	0.020	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.460	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.220	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.310	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8,201	6,014	-7,276	-22,955	-22,955	-30,559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5,630	3,846	4,323	3,758	3,758	4,002
A4 - Fuel		0	1,398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4,460	3,604	2,479	2,394	2,394	4,435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

TABLEA32.XLS

Table A.3.2 DATA INPUTS FOR VEHICLE OPERATING COST ANALYSIS							
Vehicle Operating Cost Model Inputs	Unit	ARMENIA					
		1 Car	4 Utility Vehicle	5 Large Bus	8 Medium (2-axle) Truck	9 Heavy (3-axle) Truck	10 Articulated (>3-axle) Truck
Roadway Characteristics							
Surface type		Paved	Paved	Paved	Paved	Paved	Paved
Average roughness (IRI)	m/km	5	5	5	5	5	5
Average positive gradient	%	5	5	5	5	5	5
Average negative gradient	%	5	5	5	5	5	5
Proportion of uphill travel	%	50	50	50	50	50	50
Average horizontal curvature	deg/km	5	5	5	5	5	5
Average superelevation	fraction	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C	0.00012C
Altitude of terrain	m.	1,000	1,000	1,000	1,000	1,000	1,000
Effective number of lanes		>1	>1	>1	>1	>1	>1
Vehicle Characteristics							
Tare (unladen) weight	kg	960	1,320	10,400	4,525	7,500	12,130
Load carried	kg	400	900	3,500	3,500	6,000	15,000
Maximum used driving power	metric HP	41	40	138	67	147	147
Maximum used braking power	metric HP	20	32	208	147	217	436
Desired speed	km/hour	98.3	94.9	93.4	88.8	88.8	84.1
Aerodynamic drag coefficient	dimensionless	0.45	0.48	0.65	0.85	0.85	0.63
Projected frontal area	m ²	1.80	2.72	6.30	5.20	5.20	5.75
Calibrated engine speed	rpm	3,500	3,300	2,300	1,800	1,800	1,700
Energy efficiency factor	dimensionless	0.95	0.90	0.95	1.00	1.00	1.00
Fuel adjustment factor (alpha 2)	dimensionless	1.16	1.16	1.15	1.15	1.15	1.15
Tyre Wear Data							
Number of tyres per vehicle		4	4	6	6	10	18
Wearable volume of rubber per tyre	dm ³			6.85	7.60	7.30	8.39
Retreading cost per new tyre	Fraction	0.3	0.3	0.3	0.3	0.3	0.3
Maximum number of recaps		1	1	1	1	1	1
Constant term of tread wear model	dm ³ /m			0.164	0.164	0.164	0.164
Wear coefficient for tread wear model	10 ⁻³ dm ³ /kj			12.780	12.780	12.780	12.780
Vehicle Utilisation Data							
Average annual utilisation	km	25,000	40,000	120,000	60,000	90,000	90,000
Average annual utilisation	hours	500	875	2,000	1,430	1,370	1,500
Hourly utilisation ratio (HURATIO)	Fraction	0.4	0.5	0.6	0.6	0.6	0.65
Average service life	Years	15	12	10	15	10	10
Use constant service life ?		No	No	No	No	No	No
Age of vehicle in km	km	131,250	156,000	281,250	262,500	218,750	300,000
Passengers per vehicle		2	5	45			
Unit Costs							
New vehicle price	US\$	7,000	6,000	50,000	15,000	45,000	60,000
Fuel cost	US\$/litre	0.35	0.35	0.3	0.3	0.3	0.3
Lubricants cost	US\$/litre	1.4	1.4	1.4	1.4	1.4	1.4
New tyre cost	US\$	45	50	200	150	200	250
Crew time cost	US\$/hour		0.26	0.39	0.39	0.39	0.52
Passenger delay cost	US\$/hour						
Maintenance labour cost	US\$/hour	0.31	0.31	0.31	0.31	0.31	0.31
Cargo delay cost	US\$/hour						
Annual interest rate (%)	%	12	12	12	12	12	12
Overhead per vehicle km	US\$		0.01	0.02	0.025	0.025	0.025
Additional Coefficients							
KP - Maintenance parts		0.308	0.308	0.483	0.371	0.371	0.371
CPo - Maintenance parts	10E-6	32.490	32.490	1.770	1.490	8.610	13.940
CPq - Maintenance parts	10E-3	13.700	13.700	3.560	251.790	35.310	15.650
QIPo - Maintenance parts		120.000	120.000	190.000	0.000	0.000	0.000
CLo - Maintenance parts		77.140	77.140	293.440	242.030	301.480	652.510
CLp - Maintenance parts		0.547	0.547	0.517	0.519	0.519	0.519
CLq - Maintenance parts		0.000	0.000	0.006	0.000	0.000	0.000
COo - Lubricants		1.550	1.550	3.070	3.070	3.070	5.150
FRATIO0 - VCURVE		0.268	0.221	0.233	0.292	0.292	0.179
FRATIO1 - VCURVE	10E-4	0	0	0	0.094	0.094	0.023
ARVMAX - VROUGH		259.7	239.7	212.8	177.7	177.7	130.9
BW - VDESIR		1	1	1	1	1	1
BETA - Speed		0.274	0.308	0.273	0.310	0.310	0.244
EO - Speed		1.003	1.004	1.012	1.013	1.013	1.018
A0 - Fuel		-8201	6014	-7276	-22955	-22955	-30559
A1 - Fuel		33.4	37.6	63.5	95.0	95.0	156.1
A2 - Fuel		0	0	0	0	0	0
A3 - Fuel		5630	3846	4323	3758	3758	4002
A4 - Fuel		0	1.398	0	0	0	0
A5 - Fuel		0	0	8.64	19.12	19.12	4.41
A6 - Fuel		4460	3604	2479	2394	2394	4435
A7 - Fuel		0	0	11.50	13.76	13.76	26.08
NHO - Fuel		-10	-12	-50	-85	-85	-85
Alpha1		0.7	1	1	1	1	1

Table A.3.1 Representative Vehicle Models Selected for Vehicle Operating Cost Analysis

Country	Representative Vehicle Types/Models					
	Car	Utility vehicle	Large Bus	Medium 2-axle Truck	Heavy 3-axle Truck	Heavy Truck + Trailer 5-axes
Armenia	Lada 124	Eraz 762vgp	Ikarus 256	Zil 130-80	Kamaz 5320	Kamaz 5410
Azerbaijan	Lada 124	GAZ 52	Ikarus 25058	Zil 130 431410	Kamaz 53212	Kamaz 54112
Georgia	Lada 124	Raf 2203	Ikarus 25058	Zil 130-80	Kamaz 53212	Kamaz 54112
Kazakhstan	Lada 2106	Raf 2203	Ikarus 25058	GAZ-SAZ 53B	Kamaz 53212	Kamaz 5410
Kyrgyzstan	Lada 2107	Raf 2203	Ikarus 250	Zil 130	Kamaz 5320	Kamaz 54112
Tajikistan	Lada 124	Raf 2203	Ikarus 256	Zil 130	Kamaz 5320	Kamaz 54112
Turkmenistan	Lada 124	Eraz 762vgp	Ikarus 256	Zil 130-80	Kamaz 5320	Kamaz 54112
Uzbekistan	Lada 1600	Raf 2203	Ikarus 256	Zil 130-80	Kamaz 5320	Kamaz 54112

Source: Consultant's estimate

ANNEX 3

Design guidelines and codes relating to road signage, and to geometric design of rural highways, including rural road intersections, are to be reviewed in detail with local experts and compared to current Western practice. Suggestions for revision are to be made. They should recommend the most suitable Western design guidelines for adoption, noting any adaptations, if considered necessary.

Work in this section should be closely coordinated with the road safety seminars, to promote a maximum of local input.

3.6 Study Tour and Seminars

A study tour to Western Europe is to be provided for twenty persons, to be nominated by the Consultant and approved by the Recipient States. The tour is to focus on routine maintenance practice, bitumen bound materials technology and road safety.

The Consultant is to arrange site visits and demonstrations, such as to

- working road and bridge maintenance units
- bituminous bound materials production plants
- in-situ surface recycling operations
- on-site expositions and explanations of road safety dispositions

About five full working days is to be foreseen, plus appropriate acclimatisation/briefing and debriefing periods. Participants should meet West European counterparts, and be able to question them on all aspects of the activities they are shown. Russian language interpreters are to be in attendance.

Short seminars are to be organised in each of the Recipient States to present overviews, explanations of state-of-the-art PMS, bituminous bound products technology, bridge maintenance techniques and concepts of road safety, to Roads Directorate senior staff. Seminar manuals are to be prepared in the Russian language.

Road safety presentations should cover the most recent and ongoing work in the West concerned with the prediction of accidents and implementation of safety measures (eg. conflict techniques of safety situation analysis, the economic analysis of safety measures, recent case studies and risk analysis findings). It may be assumed that the basic principles and established standards of road safety design are already known by the local authorities.

Bridge maintenance presentations should include the most recent Western practice for treatment of cracking, concrete removal, patch repairs, sprayed concrete, external reinforcement, supplementary prestress, corrosion countermeasures, surface treatments, coating of reinforcement, cathodic protection, desalination and realkalisation..

3.7 Cost and Financing of Road Usage

3.7.1 The present system of taxes is neither effective in financing road maintenance, nor in allocating the incremental cost of road usage within the economy. Furthermore, it could provoke

distortion of demand within the transport sector. The general problem has been reviewed in previous reports by Western consultants.

This study is to present a rigorous, authoritative analysis embracing:

- the cost of road usage
 - the elements comprising vehicle operating costs and their dependency on road condition
 - the dependency of condition on maintenance practice
 - the eventual reconstruction costs under scenarios such as do-nothing, minimum maintenance and optimised scenarios
 - the incremental deterioration of pavements under the effect of axle loads
- the advantages and disadvantages of the present collection systems, including for example
 - a comparison with marginal cost pricing
 - the impact of transit fees across the region
 - distortions to competition between modes
 - distortions to vehicle and fuel demand
- external costs of road transport
- foreign exchange components in overall cost of road transport, for the different states

Recommendations are to be made for workable, balanced, systems of levying taxes on road use, and the equitable allocation of funds to road maintenance. The cost inputs are to be considered separately for each State.

A full analysis of tolling of roads and bridges is beyond the scope of this study. However any obvious candidate projects may be cited and used as an example.

The order of magnitude of time and safety costs and savings are to be estimated and presented, but separately from direct costs. The effects of congestion may be included qualitatively.

Full collaboration with the Ministries of Economy and Finance in the preparation of this analysis and recommendations, will be essential for the output to have any impact.

Serious price distortions (eg through subsidies) have been encountered. Shadow pricing is to be applied as appropriate, but applications should then be clearly explained.

The cost and financing analysis described in this section is to be issued as a separate report dealing with this single issue. It should be clear and concise, to address a readership of Officials in the TRACECA states, foreign consultants (eg to Ministries of Economy and Finance), as well as other decision makers, who may be presumed unfamiliar with transport economics. It should be strictly objective, and applicable as a reference document for negotiations between Ministries of Transport and Ministries of Economy and Finance in the Region. It should emphasise the local consequences and obligations of road maintenance policies, rather than seeking to justify IFI intervention.

ANNEX 1

E U R O P E A N U N I O N - T A C I S

**Technical Assistance to the Southern Republics of the CIS
and Georgia - TRACECA**

TRADE AND TRANSPORT SECTORS

IMPLEMENTATION OF PAVEMENT MANAGEMENT SYSTEMS

PROJECT NO.: TELREG 9305

DRAFT FINAL REPORT

STUDY OF THE COST AND FINANCING OF ROAD USAGE

VOLUME 2, ANNEX

DECEMBER 1996

**KOCKS CONSULT GMBH
Consulting Engineers
Koblenz / Germany**

in association with

**TECNECON, Economic
and Transport Consultants
London / U. K.**

**PHØNIX
Pavement Consultants
Vejen / Denmark**

Kocks Consult GmbH · P. O. Box 10 60 · 56010 Koblenz · FRG

The European Commission
Directorate General I A
External Relations
88, Rue d'Arlon

B-1040 Brussels

Tacis IA/C/7

Ref.:

243/Wi-ns/1707

Attn. Mr. D. Stroobants

Head Office Koblenz
Stegemannstraße 32 - 38
56068 Koblenz

Phone: xx (49 261) 13 02-0
Telefax: xx (49 261) 13 02-15 2
Cable: KOCON

Koblenz.

19.12.1996

Dear Sir,

***TRACECA Project: Implementation of Pavement Management Systems
Project Number: TELREG 9305
Study of the Cost and Finance of Road Usage***

We take pleasure in submitting to you the draft final report of the above study comprising Volume 1 Main Report and Volume 2 Annex for your review and comment.

The report is submitted in six copies, five bound and one loose leaf. A copy of Volume 1 has been forwarded by E-Mail to the Tacis Coordinating Units in the eight recipient states as well as to the Tacis Monitoring & Evaluation Central Asia in Almaty.

The Russian version is presently under translation and will be submitted together with the diskette as soon as completed.

Yours faithfully

KOCKS CONSULT GMBH
Consulting Engineers



Ulrich Sprick



Ulrich Willems

Copies to: Tacis CU, all 8 recipient states